

Air Quality Assessment
Chapman Street, Gorton

Client: 3DReid Limited

Reference: 10418r2

Date: 13th February 2026



Report Issue

Report Title: Air Quality Assessment - Chapman Street, Gorton

Report Reference: 10418

Field	Report Version			
	1	2	3	4
Prepared by	Megan Pond	Megan Pond		
Position	Air Quality Consultant	Air Quality Consultant		
Reviewed by	Lauren Massingham	Lauren Massingham		
Position	Associate Air Quality Consultant	Associate Air Quality Consultant		
Authorised by	Claire Meddings	Claire Meddings		
Position	Director	Director		
Date of Issue	28 th January 2026	13 th February 2026		
Comments	-	-		

Serendipity Labs, Building 7, Exchange Quay, Salford, M5 3EP

info@red-env.co.uk | 0161 706 0075 | www.red-env.co.uk

This report has been prepared by Redmore Environmental Ltd in accordance with the agreed terms and conditions of appointment. Redmore Environmental Ltd cannot accept any responsibility for any use of or reliance on the contents of this report by any third party.

Executive Summary

Redmore Environmental Ltd was commissioned by 3DReid Limited to undertake an Air Quality Assessment in support of an independent living scheme at Chapman Street, Gorton, Manchester.

An Air Quality Assessment was undertaken to:

- Assess potential impacts associated with fugitive dust emissions during the construction phase of the proposed development;
- Assess potential impacts associated with road transport emissions during the operational phase of the proposed development;
- Assess risk of exposure of future residents to any existing air quality issues; and,
- Identify the requirement for relevant mitigation measures.

Potential construction phase air quality impacts from fugitive dust emissions were assessed as a result of earthworks, construction and trackout activities. It is considered that the use of the identified site-specific control measures would provide suitable mitigation for a development of this size and nature and reduce potential impacts to an acceptable level.

Potential impacts during the operational phase of the proposals may occur due to road traffic exhaust emissions associated with vehicles travelling to and from the site. These were assessed using standard screening criteria. Based on the nature of the proposals, road traffic exhaust emission impacts were not predicted to be significant.

The proposal has the potential to expose future residents to elevated pollution levels. Dispersion modelling was therefore undertaken in order to predict concentrations across the site as a result of emissions from the highway network. Results were subsequently verified using local monitoring data.

The results of the dispersion modelling assessment indicated that predicted pollutant concentrations were below the relevant criteria across the development. As such, the site is considered suitable for the proposed end use from an air quality perspective and mitigation is not required.

A number of mitigation measures were identified in line with the requirements of Manchester City Council's 'Air Quality and Planning Technical Guidance' in order to reduce vehicle exhaust emissions associated with the proposals. It is considered these are appropriate for a development of this scale and nature and will further control impacts during the operational phase.

Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.

Table of Contents

1.0 INTRODUCTION	1
1.1 Instruction	1
1.2 Site Location and Context	1
1.3 Assessment Scope	1
2.0 LEGISLATION AND POLICY	2
2.1 Legislation	2
2.2 Local Air Quality Management	4
2.3 Dust	4
2.4 National Planning Policy	5
2.5 National Planning Practice Guidance	6
2.6 Regional Planning Policy	7
2.7 Local Planning Policy	9
2.8 Greater Manchester Clean Air Plan	10
3.0 METHODOLOGY	11
3.1 Introduction	11
3.2 Construction Phase Fugitive Dust Emissions	11
Step 1 - Screen the Need for an Assessment	12
Step 2 - Assess the Risk of Dust Impacts	12
Step 3 - Site-specific Mitigation	17
Step 4 - Determine Significance	17
3.3 Operational Phase Assessment	17
Potential Development Impacts	17
Potential Future Exposure	18
4.0 BASELINE	20
4.1 Introduction	20
4.2 Local Air Quality Management	20
4.3 Air Quality Monitoring	20
4.4 Background Pollutant Concentrations	21
4.5 Sensitive Receptors	22
5.0 CONSTRUCTION PHASE ASSESSMENT	23
5.1 Introduction	23
5.2 Step 1 - Screen the Need for an Assessment	23
5.3 Step 2a - Define the Potential Dust Emission Magnitude	23
Earthworks	23

Construction	23
Trackout	24
5.4 Step 2b - Define the Sensitivity of the Area	24
Dust Soiling	24
Human Health	24
5.5 Step 2c - Define the Risk of Dust Impacts	25
5.6 Step 3 - Site-specific Mitigation	25
5.7 Step 4 - Determine Significance	27
6.0 OPERATIONAL PHASE ASSESSMENT	28
6.1 Introduction	28
6.2 Potential Development Impacts	28
6.3 Potential Future Exposure	28
6.4 Interim Planning Guidance for PM _{2.5}	29
7.0 MITIGATION	31
8.0 CONCLUSION	33
9.0 ABBREVIATIONS	35

Appendices

Appendix 1 - Assessment Input Data

Appendix 2 - Curricula Vitae

1.0 INTRODUCTION

1.1 Instruction

- 1.1.1 Redmore Environmental Ltd was commissioned by 3DReid Limited to undertake an Air Quality Assessment in support of an independent living scheme at Chapman Street, Gorton, Manchester.

1.2 Site Location and Context

- 1.2.1 The site is located at Chapman Street, Gorton, Manchester, at approximate National Grid Reference (NGR): 388840, 396320. The relevant Local Authority (LA) is Manchester City Council (MCC). Reference should be made to Figure 1 for a map of the site and surrounding area.
- 1.2.2 The proposals comprise the construction of a 34-bed independent living scheme over two storeys with associated works.

1.3 Assessment Scope

- 1.3.1 The development proposals have the potential to cause air quality impacts. As such, an Air Quality Assessment was undertaken to:
- Assess potential impacts associated with fugitive dust emissions during the construction phase of the proposed development;
 - Assess potential impacts associated with road transport emissions during the operational phase of the proposed development;
 - Assess risk of exposure of future residents to any existing air quality issues; and,
 - Identify the requirement for relevant mitigation measures.
- 1.3.2 This is detailed in the following report.

2.0 **LEGISLATION AND POLICY**

2.1 **Legislation**

2.1.1 The Air Quality Standards Regulations (2010) and subsequent amendments include Air Quality Limit Values (AQLVs) for the following pollutants:

- Nitrogen dioxide (NO₂);
- Sulphur dioxide;
- Lead;
- Particulate matter with an aerodynamic diameter of less than 10µm (PM₁₀);
- Particulate matter with an aerodynamic diameter of less than 2.5µm (PM_{2.5});
- Benzene; and,
- Carbon monoxide.

2.1.2 Air Quality Target Values have also been provided for several additional pollutants. It should be noted that the AQLV for PM_{2.5} stated in the Air Quality Standards Regulations (2010) was amended in the Environment (Miscellaneous Amendments) (EU Exit) Regulations (2020).

2.1.3 The Air Quality Strategy (AQS) was produced by the Department for Environment, Food and Rural Affairs (DEFRA) and published on 28th April 2023¹. The document contains standards, objectives and measures for improving ambient air quality, including a number of Air Quality Objectives (AQOs). These are maximum ambient pollutant concentrations that are not to be exceeded either without exception or with a permitted number of exceedences over a specified timescale. These are generally in line with the AQLVs, although the requirements for the determination of compliance vary.

2.1.4 The Environmental Improvement Plan 2025² was published in December 2025, providing long term and Interim Targets in order to reduce population exposure to PM_{2.5}. The Concentration Target for 2040 was adopted in the Environmental Targets (Fine Particulate Matter) (England) Regulations (2023).

¹ AQS: Framework for Local Authority Delivery, DEFRA, 2023.

² Environmental Improvement Plan 2025, DEFRA, 2025.

2.1.5 Table 1 presents the AQOs, Interim Target and Concentration Target for pollutants considered within this assessment.

Table 1 Air Quality Objectives/ Interim Target/ Concentration Target

Pollutant	Air Quality Objective/ Interim Target/ Concentration Target	
	Concentration ($\mu\text{g}/\text{m}^3$)	Averaging Period
NO ₂	40	Annual mean
	200	1-hour mean, not to be exceeded on more than 18 occasions per annum
PM ₁₀	40	Annual mean
	50	24-hour mean, not to be exceeded on more than 35 occasions per annum
PM _{2.5}	10 ^(a)	Annual mean
	10 ^(b)	Annual Mean

Note: (a) Interim Target to be achieved by 2030.

(b) Concentration Target to be achieved by 2040.

2.1.6 Table 2 summarises the advice provided in DEFRA guidance³ on where the AQOs for pollutants considered within this report apply.

Table 2 Examples of Where the Air Quality Objectives Apply

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
Annual mean	<p>All locations where members of the public might be regularly exposed</p> <p>Building façades of residential properties, schools, hospitals, care homes etc.</p>	<p>Building façades of offices or other places of work where members of the public do not have regular access</p> <p>Hotels, unless people live there as their permanent residence</p> <p>Gardens of residential properties</p> <p>Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term</p>

³ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Averaging Period	Objective Should Apply At	Objective Should Not Apply At
24-hour mean	All locations where the annual mean objective would apply, together with hotels Gardens of residential properties	Kerbside sites (as opposed to locations at the building façade), or any other location where public exposure is expected to be short term
1-hour mean	All locations where the annual mean and 24 and 8-hour mean objectives apply. Kerbside sites (for example, pavements of busy shopping streets) Those parts of car parks, bus stations and railway stations etc which are not fully enclosed, where members of the public might reasonably be expected to spend one hour or more Any outdoor locations where members of the public might reasonably be expected to spend one hour or longer	Kerbside sites where the public would not be expected to have regular access

2.2 Local Air Quality Management

2.2.1 LAs are required to periodically review and assess air quality within their area of jurisdiction under the system of Local Air Quality Management (LAQM). This review and assessment of air quality involves comparing present and likely future pollutant concentrations against the AQOs. If it is predicted that levels at locations of relevant exposure, as summarised in Table 2, are likely to be exceeded, the LA is required to declare an Air Quality Management Area (AQMA). For each AQMA the LA is required to produce an Air Quality Action Plan, the objective of which is to reduce pollutant concentrations in pursuit of the AQOs.

2.3 Dust

2.3.1 The main requirements with respect to dust control from industrial or trade premises not regulated under the Environmental Permitting (England and Wales) Regulations (2016) and subsequent amendments, such as construction sites, is that provided in Section 79 of Part III of the Environmental Protection Act (1990). The Act defines nuisance as:

"any dust, steam, smell or other effluvia arising on industrial, trade or business premises and being prejudicial to health or a nuisance."

2.3.2 Enforcement of the Act, in regard to nuisance, is currently under the jurisdiction of the local Environmental Health Department, whose officers are deemed to provide an independent evaluation of nuisance. If the LA is satisfied that a statutory nuisance exists, or is likely to occur or happen again, it must serve an Abatement Notice under Part III of the Environmental Protection Act (1990). The only defence is to show that the process to which the nuisance has been attributed and its operation are being controlled according to best practicable means.

2.4 National Planning Policy

2.4.1 The revised National Planning Policy Framework⁴ (NPPF) was published in December 2024 and amended in February 2025. It sets out the Government's planning policies for England and how these are expected to be applied.

2.4.2 The purpose of the planning system is to contribute to the achievements of sustainable development. In order to ensure this, the NPPF recognises three overarching objectives including the following of relevance to air quality:

"c) an environmental objective - to protect and enhance our natural, built and historic environment; including making effective use of land, improving biodiversity, using natural resources prudently, minimising waste and pollution, and mitigating and adapting to climate change, including moving to a low carbon economy."

2.4.3 Chapter 15 of the NPPF details objectives in relation to conserving and enhancing the natural environment. It states that:

"Planning policies and decisions should contribute to and enhance the natural and local environment by:

[...]

e) preventing new and existing development from contributing to, or being put at unacceptable risk from, or being adversely affected by, unacceptable levels of

⁴ NPPF, Ministry of Housing, Communities and Local Government, 2024.

soil, air, water or noise pollution or land instability. Development should, wherever possible, help to improve local environmental conditions such as air and water quality [...]"

2.4.4 The NPPF specifically recognises air quality as part of delivering sustainable development and states that:

"Planning policies and decisions should sustain and contribute towards compliance with relevant limit values or national objectives for pollutants, taking into account the presence of Air Quality Management Areas and Clean Air Zones, and the cumulative impacts from individual sites in local areas. Opportunities to improve air quality or mitigate impacts should be identified, such as through traffic and travel management, and green infrastructure provision and enhancement. So far as possible these opportunities should be considered at the plan-making stage, to ensure a strategic approach and limit the need for issues to be reconsidered when determining individual applications. Planning decisions should ensure that any new development in Air Quality Management Areas and Clean Air Zones is consistent with the local air quality action plan."

2.4.5 The implications of the NPPF have been considered throughout this assessment.

2.5 National Planning Practice Guidance

2.5.1 The National Planning Practice Guidance⁵ (NPPG) web-based resource was launched by the Department for Communities and Local Government to support the NPPF and make it more accessible. The air quality pages are summarised under the following headings:

1. What air quality considerations does planning need to address?
2. What is the role of plan-making with regard to air quality?
3. Are air quality concerns relevant to neighbourhood planning?
4. What information is available about air quality?
5. When could air quality be relevant to the planning development management process?
6. What specific issues may need to be considered when assessing air quality impacts?

⁵ <https://www.gov.uk/guidance/air-quality--3>.

7. How detailed does an air quality assessment need to be?
8. How can an impact on air quality be mitigated?

2.5.2 These were reviewed and the relevant guidance considered as necessary throughout the undertaking of this assessment.

2.6 Regional Planning Policy

2.6.1 Places for Everyone⁶ was adopted on 21st March 2024 by nine Greater Manchester Councils, including MCC. Review of the document indicated the following policy of relevance to the assessment:

"Policy JP:S5: Clean Air

A comprehensive range of measures will be taken to support improvements in air quality, focusing particularly on locations where people live, where children learn and play, where there are impacts on the green infrastructure network and where air quality targets are not being met, including:

1. Locating and designing development, and focusing transport investment, so as to reduce reliance on forms of transport that generate air pollution;
2. Determining planning applications having regard to the most recent development and planning control guidance published jointly by the Institute of Air Quality Management (IAQM) and Environmental Protection UK (EPUK), and the most recent IAQM Guidance on the Assessment of Dust from Demolition and Construction, or relevant successor guidance, including the requirement for developers to submit construction management plans as appropriate;
3. Requiring applications for developments that could have an adverse impact on air quality to submit relevant air pollution data so that adverse impacts on air quality can be fully assessed and development only permitted where they are acceptable and/or suitable mitigation can be provided;

⁶ Places for Everyone Joint Development Plan Document for Bolton, Bury, Manchester, Oldham, Rochdale, Salford, Tameside, Trafford and Wigan, Greater Manchester Combined Authority, 2024.

4. Restricting developments that would generate significant point source pollution such as some types of industrial activity and energy generation;

5. Significantly expanding the existing commercial network of electric vehicle charging points, both for public and private use, including as part of new developments;

6. Implementing the Clean Air Plan and associated measures;

7. Facilitating the more sustainable distribution of goods within the urban area, including through accommodating urban consolidation centres and urban distribution centres that use ultra-low-emission vehicles, and local delivery facilities to reduce repeat delivery attempts;

8. Designing streets to avoid trapping air pollution at ground level, including through the appropriate location and scale of buildings and trees;

9. Controlling traffic and parking within and around schools, early years sites and other locations that are particularly sensitive to air quality;

10. Promoting actions that help remove pollutants from the air, such as enhancing the green infrastructure network and using innovative building materials that capture air pollutants; and,

11. Development should be located in areas that maximise the use of sustainable travel modes and be designed to minimise exposure to high levels of air pollution, particularly for vulnerable users."

"Policy JP-P1 Sustainable Places

We aim to become one of the most liveable city regions in the world, consisting of a series of beautiful, healthy and varied places, each having the following key attributes that all development, wherever appropriate, should be consistent with:
[...]

15. Comfortable and inviting, with indoor and outdoor environments:

A. Offering a high level of amenity that minimises exposure to pollution; and,

[...]."

2.6.2 The above policies were considered as necessary throughout the undertaking of the assessment.

2.7 Local Planning Policy

2.7.1 The Manchester Local Development Framework consists of a series of planning documents of which the Core Strategy Development Plan Document (DPD)⁷ is central. This was adopted by MCC on 11th July 2012.

2.7.2 Review of the Core Strategy DPD indicated the following policies of relevance to the assessment:

"Policy DM 1

Development Management

All development should have regard to the following specific issues for which more detailed guidance may be given within a supplementary planning document:

[...]

Effects on amenity, including privacy, light, noise, vibration, air quality, odours, litter, vermin, birds, road safety and traffic generation. This could also include proposals which would be sensitive to existing environmental conditions, such as noise."

"Policy EN 16

⁷ Core Strategy DPD, MCC, 2012.

Air Quality

The Council will seek to improve the air quality within Manchester."

- 2.7.3 It should be noted that MCC issued an addendum to the Core Strategy⁸ in 2024. This confirms that the remaining text of Policy EN16 has been superseded by PfEP Policy JP-S5, as referenced in Section 2.6.
- 2.7.4 MCC has also produced the 'Air Quality & Planning Technical Guidance' Document⁹ which provides guidance on assessing the impact of proposed development on air quality.
- 2.7.5 The above policies and guidance were taken into consideration throughout the undertaking of the assessment.

2.8 **Greater Manchester Clean Air Plan**

- 2.8.1 The UK Government has instructed a number of LAs to take rapid action to reduce harmful roadside levels of NO₂ within their areas of jurisdiction in the quickest possible timeframe. The GMCA and Transport for Greater Manchester (TfGM) have collaborated to develop a Clean Air Plan (CAP) to ensure Greater Manchester achieves compliance with the relevant AQOs for NO₂ by 2026 at the latest. The initial CAP proposal included implementation of a Class C charging Clean Air Zone. The GMCA has subsequently updated the CAP proposals¹⁰ to comprise an investment-led, non-charging approach. This was approved by the UK Government on 23rd January 2025. The implications of the CAP were taken into account during the undertaking of this assessment.

⁸ Addendum to Manchester Core Strategy 2024, MCC, 2024.

⁹ Air Quality & Planning Technical Guidance, MCC, 2022.

¹⁰ Case for a New GM Clean Air Plan, GMCA and TfGM, 2022.

3.0 METHODOLOGY

3.1 Introduction

3.1.1 The proposed development has the potential to cause air quality impacts during the construction and operational phases, as well as expose future residents to elevated pollution levels. These factors have been assessed in accordance with the following methodology.

3.2 Construction Phase Fugitive Dust Emissions

3.2.1 There is the potential for fugitive dust emissions to occur as a result of construction phase activities. These have been assessed in accordance with the methodology outlined within the Institute of Air Quality Management (IAQM) document 'Guidance on the Assessment of Dust from Demolition and Construction V2.2'¹¹.

3.2.2 Activities on the proposed construction site have been divided into three types to reflect their different potential impacts. These are:

- Earthworks;
- Construction; and,
- Trackout.

3.2.3 The potential for dust emissions was assessed for each activity that is likely to take place and considered three separate dust effects:

- Annoyance due to dust soiling;
- Harm to ecological receptors; and,
- The risk of health effects due to a significant increase in exposure to PM₁₀.

3.2.4 The assessment steps are detailed below.

¹¹ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

Step 1 - Screen the Need for an Assessment

- 3.2.5 Step 1 screens the requirement for a more detailed assessment. Should human receptors be identified within 250m from the boundary or 50m from the construction vehicle route up to 250m from the site entrance, then the assessment proceeds to Step 2. Additionally, should ecological receptors be identified within 50m of the site or the construction vehicle route up to 250m from the site entrance, then the assessment also proceeds to Step 2.
- 3.2.6 Should sensitive receptors not be present within the relevant distances then **negligible** impacts would be expected and further assessment is not necessary.

Step 2 - Assess the Risk of Dust Impacts

- 3.2.7 Step 2 assesses the risk of potential dust impacts. A site is allocated a risk category based on two factors:
- The scale and nature of the works, which determines the magnitude of dust arising as: small, medium or large (Step 2A); and,
 - The sensitivity of the area to dust impacts, which can be defined as low, medium or high sensitivity (Step 2B).
- 3.2.8 The two factors are combined in Step 2C to determine the risk of dust impacts without mitigation applied.
- 3.2.9 Step 2A defines the potential magnitude of dust emission through the construction phase. The relevant criteria are summarised in Table 3.

Table 3 Construction Dust - Magnitude of Emission

Magnitude	Activity	Criteria
Large	Earthworks	<ul style="list-style-type: none">• Total site area greater than 110,000m²• Potentially dusty soil type (e.g. clay, which will be prone to suspension when dry due to small particle size)• More than 10 heavy earth moving vehicles active at any one time• Formation of bunds greater than 6m in height

Magnitude	Activity	Criteria
	Construction	<ul style="list-style-type: none"> Total building volume greater than 75,000m³ On site concrete batching Sandblasting
	Trackout	<ul style="list-style-type: none"> More than 50 Heavy Duty Vehicle (HDV) trips per day Potentially dusty surface material (e.g. high clay content) Unpaved road length greater than 100m
Medium	Earthworks	<ul style="list-style-type: none"> Total site area 18,000m² to 110,000m² Moderately dusty soil type (e.g. silt) 5 to 10 heavy earth moving vehicles active at any one time Formation of bunds 3m to 6m in height
	Construction	<ul style="list-style-type: none"> Total building volume 12,000m³ to 75,000m³ Potentially dusty construction material (e.g. concrete) On site concrete batching
	Trackout	<ul style="list-style-type: none"> 20 to 50 HDV trips per day Moderately dusty surface material (e.g. high clay content) Unpaved road length 50m to 100m
Small	Earthworks	<ul style="list-style-type: none"> Total site area less than 18,000m² Soil type with large grain size (e.g. sand) Less than 5 heavy earth moving vehicles active at any one time Formation of bunds less than 3m in height
	Construction	<ul style="list-style-type: none"> Total building volume less than 12,000m³ Construction material with low potential for dust release (e.g. metal cladding or timber)
	Trackout	<ul style="list-style-type: none"> Less than 20 HDV trips per day Surface material with low potential for dust release Unpaved road length less than 50m

3.2.10 Step 2B defines the sensitivity of the area around the development to potential dust impacts. The sensitivities of specific receptors are summarised in Table 4.

Table 4 Construction Dust - Sensitivities of People and Ecological Receptors

Receptor Sensitivity	Examples	
	Human Receptors	Ecological Receptors
High	<ul style="list-style-type: none"> Users expect high levels of amenity High aesthetic or value property People expected to be present continuously for extended periods of time Locations where members of the public are exposed over a time period relevant to the AQO for PM₁₀. e.g. residential properties, hospitals, schools and residential care homes 	<ul style="list-style-type: none"> Internationally or nationally designated site e.g. Special Area of Conservation
Medium	<ul style="list-style-type: none"> Users would expect to enjoy a reasonable level of amenity Aesthetics or value of their property could be diminished by soiling People or property wouldn't reasonably be expected to be present here continuously or regularly for extended periods as part of the normal pattern of use of the land e.g. parks and places of work 	<ul style="list-style-type: none"> Nationally designated site e.g. Sites of Special Scientific Interest
Low	<ul style="list-style-type: none"> Enjoyment of amenity would not reasonably be expected Property would not be expected to be diminished in appearance Transient exposure, where people would only be expected to be present for limited periods. e.g. public footpaths, playing fields, shopping streets, farmland, short term car parks and roads 	<ul style="list-style-type: none"> Locally designated site e.g. Local Nature Reserve

3.2.11 The criteria for determining the sensitivity of the area to dust soiling effects on people and property is summarised in Table 5.

Table 5 Construction Dust - Sensitivity of the Area to Dust Soiling Effects on People and Property

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 250
High	More than 100	High	High	Medium	Low
	10 - 100	High	Medium	Low	Low

Receptor Sensitivity	Number of Receptors	Distance from the Source (m)			
		Less than 20	Less than 50	Less than 100	Less than 250
	1 - 10	Medium	Low	Low	Low
Medium	More than 1	Medium	Low	Low	Low
Low	More than 1	Low	Low	Low	Low

3.2.12 Table 6 outlines the criteria for determining the sensitivity of the area to human health impacts.

Table 6 Construction Dust - Sensitivity of the Area to Human Health Impacts

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)			
			Less than 20	Less than 50	Less than 100	Less than 250
High	Greater than 32µg/m ³	More than 100	High	High	High	Medium
		10 - 100	High	High	Medium	Low
		1 - 10	High	Medium	Low	Low
	28 - 32µg/m ³	More than 100	High	High	Medium	Low
		10 - 100	High	Medium	Low	Low
		1 - 10	High	Medium	Low	Low
	24 - 28µg/m ³	More than 100	High	Medium	Low	Low
		10 - 100	High	Medium	Low	Low
		1 - 10	Medium	Low	Low	Low
	Less than 24µg/m ³	More than 100	Medium	Low	Low	Low
		10 - 100	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Medium	Greater than 32µg/m ³	More than 10	High	Medium	Low	Low
		1 - 10	Medium	Low	Low	Low

Receptor Sensitivity	Background Annual Mean PM ₁₀ Concentration	Number of Receptors	Distance from the Source (m)			
			Less than 20	Less than 50	Less than 100	Less than 250
	28 - 32µg/m ³	More than 10	Medium	Low	Low	Low
		1 - 10	Low	Low	Low	Low
	24 - 28µg/m ³	More than 10	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
	Less than 24µg/m ³	More than 10	Low	Low	Low	Low
		1 - 10	Low	Low	Low	Low
Low	-	1 or more	Low	Low	Low	Low

3.2.13 Table 7 outlines the criteria for determining the sensitivity of the area to ecological impacts.

Table 7 Construction Dust - Sensitivity of the Area to Ecological Impacts

Receptor Sensitivity	Distance from the Source (m)	
	Less than 20	Less than 50
High	High	Medium
Medium	Medium	Low
Low	Low	Low

3.2.14 Step 2C combines the dust emission magnitude with the sensitivity of the area to determine the risk of unmitigated impacts.

3.2.15 Table 8 outlines the risk category from earthworks, construction and trackout activities.

Table 8 Construction Dust - Dust Risk Category from Earthworks, Construction and Trackout Activities

Receptor Sensitivity	Dust Emission Magnitude		
	Large	Medium	Small
High	High	Medium	Low
Medium	Medium	Medium	Low
Low	Low	Low	Negligible

Step 3 - Site-specific Mitigation

3.2.16 Step 3 requires the identification of site-specific mitigation measures within the IAQM guidance¹² to reduce potential dust impacts based upon the relevant risk categories identified in Step 2. For sites with **negligible** risk, mitigation measures beyond those required by legislation are not required. However, additional controls may be applied as part of good practice.

Step 4 - Determine Significance

3.2.17 Once the risk of dust impacts has been determined and the appropriate mitigation measures identified, the final step is to determine the significance of any residual impacts. For almost all construction activity, the aim should be to control effects through the use of effective mitigation. Experience shows that this is normally possible. Hence the residual effect will normally be **not significant**.

3.2.18 The determination of significance relies on professional judgement and reasoning should be provided as far as practicable. The IAQM guidance suggests the provision of details of the assessor's qualifications and experience. These are provided in Appendix 2.

3.3 Operational Phase Assessment

Potential Development Impacts

3.3.1 The development has the potential to increase concentrations of NO₂, PM₁₀ and PM_{2.5} as

¹² Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

a result of road traffic exhaust emissions associated with vehicles travelling to and from the site during the operational phase. A screening assessment was therefore undertaken using the criteria contained within the IAQM 'Land-Use Planning & Development Control: Planning for Air Quality'¹³ guidance to determine the potential for trips generated by the development to affect local air quality.

3.3.2 The following criteria are provided to help establish when an assessment of potential impacts on the local area is likely to be considered necessary:

A. If any of the following apply:

- 10 or more residential units or a site area of more than 0.5ha; or,
- More than 1,000 m² of floor space for all other uses or a site area greater than 1ha.

B. Coupled with any of the following:

- The development has more than 10 parking spaces; or,
- The development will have a centralised energy facility or other centralised combustion process.

3.3.3 Should these criteria not be met, then the IAQM guidance¹⁴ considers air quality impacts associated with a scheme to be **not significant** and no further assessment is required.

Potential Future Exposure

3.3.4 The proposals have the potential to expose future residents to elevated pollution levels as a result of road vehicle exhaust emissions in the vicinity of the site. In order to assess NO₂, PM₁₀ and PM_{2.5} concentrations across the development, detailed dispersion modelling was undertaken. Reference should be made to Appendix 1 for a full description of the assessment input data.

3.3.5 The dispersion modelling results were compared against the relevant AQOs and Concentration Target in order to determine the potential for exposure of future residents

¹³ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

¹⁴ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

to elevated pollutant concentrations and identify appropriate mitigation, if necessary.

4.0 BASELINE

4.1 Introduction

- 4.1.1 Existing air quality conditions in the vicinity of the proposed development site were identified to provide a baseline for assessment. These are detailed in the following Sections.

4.2 Local Air Quality Management

- 4.2.1 As required by the Environment Act (1995), as amended by the Environment Act (2021), MCC has undertaken Review and Assessment of air quality within its area of jurisdiction. This process has indicated that annual mean concentrations of NO₂ are above the AQO within the city. As such, a number of roads within Manchester have been included within the GMCA AQMA. This is described as follows:

"This is the part of the Greater Manchester Combined Authority AQMA located within the Manchester City Council area."

- 4.2.2 The development is partially located within the AQMA. As such, there is the potential for vehicles travelling to and from the site to increase pollution levels in this sensitive area, as well as the exposure of future residents to poor air quality. This has been considered throughout the assessment.
- 4.2.3 MCC has concluded that concentrations of all other pollutants considered within the AQS are currently below the relevant AQOs. As such, no further AQMA's have been designated.

4.3 Air Quality Monitoring

- 4.3.1 Monitoring of pollutant levels is undertaken by MCC throughout its area of jurisdiction. Data has also been collected by the GMCA to inform the CAP. Recent NO₂ concentrations recorded in the vicinity of the development, as provided in GMCA's '2024 Air Quality Annual Status Report (ASR)'¹⁵ are shown in Table 9.

¹⁵ 2024 Air Quality ASR, GMCA, 2025.

Table 9 Monitoring Results

Monitoring Site		Monitored Annual Mean NO ₂ Concentration (µg/m ³)		
		2022	2023	2024
MA73NO	Hyde Road	31.5	29.5	28.0

4.3.2 As shown in Table 9, annual mean NO₂ concentrations were below the AQO of 40µg/m³ at the MA73NO monitor in recent years. Reference should be made to Figure 2 for a map of the survey position.

4.3.3 Monitoring of PM₁₀ and PM_{2.5} is not undertaken within the vicinity of the site.

4.4 Background Pollutant Concentrations

4.4.1 Predictions of background annual mean pollutant concentrations on a 1km by 1km grid basis have been produced by DEFRA for the entire of the UK to assist LAs in their Review and Assessment of air quality. The proposed development site is located in grid square NGR: 388500, 396500. Data for this location was downloaded from the DEFRA website¹⁶ for the purpose of the assessment and is summarised in Table 10.

Table 10 Background Pollutant Concentration Predictions

Pollutant	Predicted Background Pollutant Concentration (µg/m ³)		
	2024	2026	2027
NO ₂	15.24	14.12	13.54
PM ₁₀	12.98	12.86	12.81
PM _{2.5}	7.91	7.79	7.73

4.4.2 As shown in Table 10, predicted background annual mean NO₂, PM₁₀ and PM_{2.5} concentrations are below the relevant AQOs and Concentration Target at the proposed development site.

¹⁶ <http://uk-air.defra.gov.uk/data/laqm-background-maps?year=2021>.

4.5 Sensitive Receptors

- 4.5.1 A sensitive receptor is defined as any location which may be affected by changes in air quality as a result of a development. Receptors sensitive to potential dust impacts during earthworks and construction were identified from a desk-top study of the area up to 250m from the boundary. These are summarised in Table 11.

Table 11 Earthworks and Construction Dust Sensitive Receptors

Distance from Site Boundary (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	More than 100	0
Up to 50	More than 100	0
Up to 100	More than 100	-
Up to 250	More than 100	-

- 4.5.2 Receptors sensitive to potential dust impacts from trackout were identified from a desk-top study of the area up to 50m from the road network within 250m of the site access. These are summarised in Table 12.

Table 12 Trackout Dust Sensitive Receptors

Distance from Site Access Route (m)	Approximate Number of Human Receptors	Approximate Number of Ecological Receptors
Up to 20	More than 100	0
Up to 50	More than 100	0

- 4.5.3 There are no ecological receptors within 50m of the development boundary or the access route within 250m of the site entrance. As such, ecological impacts have not been assessed further within this report.
- 4.5.4 Based on the criteria shown in Table 4, the sensitivity of the receiving environment to potential dust impacts was determined as **high**. This was because the identified receptors included residential properties and St James' Primary School.

5.0 CONSTRUCTION PHASE ASSESSMENT

5.1 Introduction

- 5.1.1 There is the potential for air quality impacts as a result of the construction of the proposed development. These are assessed in the following sections.

5.2 Step 1 - Screen the Need for an Assessment

- 5.2.1 The undertaking of activities such as excavation, ground works, cutting, construction and storage of materials have the potential to result in fugitive dust emissions throughout the construction phase. Vehicle movements on the local road network also have the potential to result in the re-suspension of dust from highway surfaces.
- 5.2.2 The potential for impacts at sensitive locations depends significantly on local meteorology during the undertaking of dust generating activities, with the most significant effects likely to occur during dry and windy conditions.
- 5.2.3 The desk-study undertaken to inform the baseline, as detailed in Section 4.5, identified a number of sensitive receptors within 250m of the site boundary and 50m of routes to be used by construction vehicles to access the site. As such, a detailed assessment of potential dust impacts was required.

5.3 Step 2a - Define the Potential Dust Emission Magnitude

Earthworks

- 5.3.1 Earthworks will primarily involve excavating material haulage, tipping and stockpiling, as well as site levelling and landscaping. The area of the proposed development site is less than 18,000m². In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from earthworks is therefore **small**.

Construction

- 5.3.2 The total proposed building volume is less than 12,000m³. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from construction is

therefore **small**.

Trackout

- 5.3.3 Based on the total site area and access routes comprising tarmacked surfaces, it is anticipated that the unpaved road length will be less than 50m. In accordance with the criteria outlined in Table 3, the magnitude of potential dust emissions from trackout is therefore **small**.

5.4 Step 2b - Define the Sensitivity of the Area

Dust Soiling

- 5.4.1 Table 11 shows that there are more than 100 **high** sensitivity receptors within 20m of the site boundary. The sensitivity of the area with respect to dust soiling from earthworks and construction, as defined using the criteria summarised in Table 5, is therefore considered to be **high**.
- 5.4.2 Table 12 shows that there are more than 100 **high** sensitivity receptors within 20m of the road network within 250m of the site access. The sensitivity of the area with respect to dust soiling from trackout, as defined using the criteria summarised in Table 5, is therefore considered **high**.

Human Health

- 5.4.3 Table 10 shows the 2026 annual mean PM₁₀ background concentration at the site is 12.86µg/m³. As shown in Table 6, where the background annual mean PM₁₀ concentration is below 24µg/m³ and there are more than 100 **high** sensitivity receptors within 20m of the site boundary, the sensitivity of the area with respect to human health from earthworks and construction is considered to be **medium**.
- 5.4.4 There are more than 100 **high** sensitivity receptors within 20m of the road network within 250m of the site access. The sensitivity of the area with respect to human health from trackout, as defined using the criteria summarised in Table 6, is therefore considered to be **medium**.

5.5 Step 2c - Define the Risk of Dust Impacts

5.5.1 The derived dust emission magnitude for each activity was combined with the sensitivity of the area to determine the risk of unmitigated impacts in line with the methodology set out in Table 8. A summary of the risk from each dust generating activity is provided in Table 13.

Table 13 Summary of Potential Unmitigated Dust Risks

Potential Impact	Activity	Step 2A - Dust Emission Magnitude	Step 2B - Sensitivity of the Area	Step 2C - Risk
Dust Soiling	Earthworks	Small	High	Low
	Construction	Small	High	Low
	Trackout	Small	High	Low
Human Health	Earthworks	Small	Medium	Low
	Construction	Small	Medium	Low
	Trackout	Small	Medium	Low

5.5.2 As indicated in Table 13, the potential risk of dust soiling and human health impacts is **low** from all activities.

5.5.3 It should be noted that the potential for impacts depends significantly on the distance between the dust generating activity and receptor location. Risk was predicted based on a worst-case scenario of works being undertaken at the site boundary closest to each sensitive area. Therefore, actual risk is likely to be lower than that predicted during the majority of the construction phase.

5.6 Step 3 - Site-specific Mitigation

5.6.1 The IAQM guidance¹⁷ provides potential mitigation measures to reduce impacts as a result of fugitive dust emissions during the construction phase. These have been adapted for the development site as summarised in Table 14. These may be reviewed prior to the

¹⁷ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

commencement of construction works and incorporated into a Construction Environmental Management Plan or similar if required by the LA.

Table 14 Fugitive Dust Emission Mitigation Measures

Issue	Control Measure
Communications	<ul style="list-style-type: none"> • Display the name and contact details of person(s) accountable for air quality and dust issues on the site boundary. This may be the environment manager/engineer or the site manager • Display the head or regional office contact information
Site management	<ul style="list-style-type: none"> • Record all dust and air quality complaints, identify cause(s), take appropriate measures to reduce emissions in a timely manner, and record the measures taken • Make the complaints log available to the LA upon request • Record any exceptional incidents that cause dust and/or air emissions, either on- or offsite, and the action taken to resolve the situation in the log book
Monitoring	<ul style="list-style-type: none"> • Carry out regular site inspections to monitor compliance with the DMP, record inspection results, and make an inspection log available to the LA upon request • Increase the frequency of site inspections when activities with a high potential to produce dust are being carried out and during prolonged dry or windy conditions
Site preparation	<ul style="list-style-type: none"> • Plan site layout so that machinery and dust causing activities are located away from receptors, as far as is possible • Erect solid screens or barriers around the site boundary that are at least as high as any stockpiles on site • Avoid site runoff of water or mud
Operating vehicle/machinery and sustainable travel	<ul style="list-style-type: none"> • Ensure all vehicles switch off engines when stationary - no idling vehicles • Limit the use of diesel or petrol powered generators and use mains electricity or battery powered equipment where practicable
Operations	<ul style="list-style-type: none"> • Only use cutting, grinding or sawing equipment fitted or in conjunction with suitable dust suppression techniques • Ensure an adequate water supply on the site for effective dust suppression, using non-potable water where possible and appropriate • Use enclosed chutes and conveyors and covered skips • Minimise drop heights and use fine water sprays wherever appropriate
Waste management	<ul style="list-style-type: none"> • Avoid bonfires or burning of waste materials
Construction	<ul style="list-style-type: none"> • Ensure sand and other aggregates are stored in bunded areas and are not allowed to dry out • Avoid scabbling (roughening of concrete surfaces) if possible

Issue	Control Measure
Trackout	<ul style="list-style-type: none">• Minimise dry sweeping• Ensure vehicles entering and leaving site are covered to prevent escape of materials

5.7 **Step 4 - Determine Significance**

- 5.7.1 Assuming the relevant mitigation measures outlined in Table 14 are implemented, the residual impact from all dust generating activities is predicted to be **not significant**, in accordance with the IAQM guidance¹⁸.

¹⁸ Guidance on the Assessment of Dust from Demolition and Construction V2.2, IAQM, 2024.

6.0 OPERATIONAL PHASE ASSESSMENT

6.1 Introduction

- 6.1.1 There is the potential for air quality impacts as a result of the operation of the proposed development. These are assessed in the following Sections.

6.2 Potential Development Impacts

- 6.2.1 The development has the potential to increase concentrations of NO₂, PM₁₀ and PM_{2.5} as a result of road traffic exhaust emissions associated with vehicles travelling to and from the site during the operational phase. These have therefore been assessed against the IAQM¹⁹ screening criteria detailed in Section 3.3. The development proposals do not include onsite car parking. As such, potential air quality impacts associated with the operational phase road vehicle exhaust emissions are predicted to be **not significant**, in accordance with the IAQM guidance²⁰.

6.3 Potential Future Exposure

- 6.3.1 The proposals have the potential to expose future residents to elevated pollution levels as a result of road vehicle exhaust emissions in the vicinity of the site. Dispersion modelling was therefore undertaken with the inputs described in Appendix 1 to quantify air quality conditions across the development. Reference should be made to Figures 3, 4 and 5 for graphical representations of predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations.
- 6.3.2 As shown in Figure 3, annual mean NO₂ concentrations were predicted to be below the AQO of 40µg/m³ at all building façades. The maximum level was 24.22µg/m³.
- 6.3.3 As shown in Figure 4, annual mean PM₁₀ concentrations were predicted to be below the AQO of 40µg/m³ at all building façades. The maximum level was 16.54µg/m³.
- 6.3.4 As shown in Figure 5, annual mean PM_{2.5} concentrations were predicted to be below the Concentration Target of 10µg/m³ at all building façades. The maximum level was

¹⁹ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

²⁰ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

9.70µg/m³.

6.3.5 Based on the assessment results, future residents are not predicted to be exposed to pollutant concentrations above the relevant AQOs and Concentration Target. As such, the site is considered suitable for the proposed use from an air quality perspective.

6.4 Interim Planning Guidance for PM_{2.5}

6.4.1 Interim Planning Guidance²¹ on the consideration of the PM_{2.5} targets identified in the Environment Act (2021) in planning decisions has been produced by DEFRA. This requires evidence that the key sources of air pollution within a development have been identified and appropriate action to minimise PM_{2.5} and its precursors as far as is reasonably practicable be provided in support of planning applications. To assist the process, two questions and associated considerations are provided. These are summarised in Table 15, along with the development response.

Table 15 Interim Planning Guidance Questions

Question	Response
<p>How has exposure to PM_{2.5} been considered when selecting the development site?</p> <ul style="list-style-type: none"> • Site proximity to people (particularly large populations and/or vulnerable groups, e.g. schools, hospitals, care homes, areas of deprivation) and the impact of the development on these • Site proximity to pollution sources and the impact of these on users of the development • Exposure and emissions during both construction and in-use 	<p>The site is located in a residential area within Gorton, approximately 5.1km east of Manchester City Centre. There are a number of schools in the vicinity of the site. However, as outlined in Sections 5.0 and 6.2, impacts associated with the scheme are predicted to be not significant</p> <p>The site is adjacent to Chapman Road and Cross Lane, however as shown in Section 6.3 the results of the assessment indicated that predicted PM_{2.5} levels are below the Concentration of 10µg/m³ at all building façades</p> <p>As outlined in Table 14, a number of mitigation measures will be used throughout the construction phase in order to reduce fugitive dust emissions as far as practicable. This will control potential exposure at off-site locations</p>

²¹ <https://uk-air.defra.gov.uk/pm25targets/planning>.

Question	Response
<p>What actions and/or mitigations have been considered to reduce PM_{2.5} exposure for development users and nearby receptors (houses, hospitals, schools etc.) and to reduce emissions of PM_{2.5} and its precursors?</p> <ul style="list-style-type: none"> • Site layout • The development's design • Technology used in the construction or installed for use in the development • Construction and future use of the development 	<p>In order to reduce emissions of PM_{2.5} across the site, as well as at nearby receptors, the following measures have been included in the proposals:</p> <ul style="list-style-type: none"> • No car parking spaces will be included in the proposals, which will minimise PM_{2.5} emissions associated with private vehicles • The site incorporates secure cycle storage to encourage active modes of travel • The development includes provision of a Framework Travel Plan to encourage sustainable transport modes • The site is located in an area with good access to public transport links, including Carfax Street bus stop and Gorton railway station. This will further encourage sustainable modes of travel <p>Further to the above, in order to reduce emissions during the construction phase, a number of mitigation measures will be used to minimise dust generation from associated activities. These are outlined in Table 14</p>

6.4.2 Based on the responses provided in Table 15 and the assessment results, as outlined in Sections 6.3, it is considered that the development has identified key sources of air pollution and taken appropriate action to minimise emissions of PM_{2.5}.

7.0 MITIGATION

7.1.1 A number of mitigation measures have been included within the development to encourage the use of sustainable transport modes, manage vehicle flow and reduce pollution around the site. These are in accordance with MCC's 'Air Quality and Planning Technical Guidance'²², which is based upon the Good Practice Design Principles outlined in the IAQM document 'Land-Use Planning & Development Control: Planning for Air Quality'²³. Table 16 describes the good practice principles along with how each has been addressed with regards to the proposals.

Table 16 Good Practice Design Principles for Operational Phase Air Quality Impacts

Phase	Principle	Action
Design Phase	New developments should not contravene the Council's AQAP ²⁴ , or render any of the measures unworkable	It is confirmed that the proposals will not contravene MCC's AQAP, or render any of the measures unworkable
	Wherever possible, new developments should not create a new "street canyon", or a building configuration that inhibits effective pollution dispersion	The development will not introduce a new street canyon
	Delivering sustainable development should be the key theme of any application	The proposals have been designed to encourage sustainable behaviours, such as active and public transport due to its proximity to local bus routes and amenities, as well as the provision of cycle storage
Operational Phase	The provision of at least 1 Electric Vehicle (EV) "rapid charge" point per 10 residential dwellings and/or 1,000m ² of commercial floor space. Where on-site parking is provided for residential dwellings, EV charging points for each parking space should be made	The development does not include provision of car parking spaces. Therefore no EV charging points will be required

²² Air Quality & Planning Technical Guidance, MCC, 2022.

²³ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

²⁴ Greater Manchester AQAP 2016-2021, GMCA, 2016.

Phase	Principle	Action
	Where development generates significant additional traffic, provision of a detailed Travel Plan (with provision to measure its implementation and effect) which sets out measures to encourage sustainable means of transport (public, cycling and walking) via subsidised or free-ticketing, improved links to bus stops, improved infrastructure and layouts to improve accessibility and safety	The development includes the provision of a Framework Travel Plan to encourage sustainable transport modes
	<p>All gas-fired boilers to meet a minimum standard of <40mgNO_x/kWh.</p> <p>All gas-fired Combined Heat and Power (CHP) plant to meet a minimum emissions standard of:</p> <ul style="list-style-type: none"> • Spark ignition engine: 250mgNO_x/Nm³; • Compression ignition engine: 400mgNO_x/Nm³; • Gas turbine: 50mgNO_x/Nm³. <p>A presumption should be to use natural gas-fired installations. Where biomass is proposed within an urban area it is to meet minimum emissions standards of:</p> <ul style="list-style-type: none"> • Solid biomass boiler: 275mgNO_x/Nm³ and 25mgPM/Nm³ 	The heating and hot water strategy is yet to be finalised. However, any boilers or CHP plant to be included in the development will be provisioned in accordance with the relevant requirements

7.1.2 It is considered the above methods would further reduce potential impacts associated with the scheme. Specific mitigation suited to the proposals may be stipulated as a planning condition if deemed necessary by the LA.

8.0 CONCLUSION

- 8.1.1 Redmore Environmental Ltd was commissioned by 3DReid Limited to undertake an Air Quality Assessment in support of an independent living scheme at Chapman Street, Gorton, Manchester.
- 8.1.2 The development has the potential to cause air quality impacts at sensitive locations during the construction and operational phases, as well as expose future residents to any existing air quality issues at the site. As such, an Air Quality Assessment was undertaken in order to determine baseline conditions, assess potential impacts as a result of the scheme and consider location suitability for the proposed end use.
- 8.1.3 During the construction phase of the development there is the potential for air quality impacts as a result of fugitive dust emissions from the site. These were assessed in accordance with the IAQM methodology. Site-specific dust control measures were subsequently determined based on the identified risk ratings. Subject to implementation, potential air quality impacts from dust generated by earthworks, construction and trackout activities are predicted to be **not significant**.
- 8.1.4 Potential impacts during the operational phase of the proposed development may occur due to road traffic exhaust emissions associated with vehicles travelling to and from the site. These were assessed against the screening criteria provided within the IAQM²⁵ guidance document. Due to the nature of the development, road traffic exhaust impacts were predicted to be **not significant**.
- 8.1.5 The proposal has the potential to expose future residents to elevated pollution levels as a result of road vehicle exhaust emissions in the vicinity of the site. Dispersion modelling was therefore undertaken using ADMS-Roads in order to predict concentrations as a result of emissions from the highway network. Results were subsequently verified using local monitoring data.
- 8.1.6 The results of the dispersion modelling assessment indicated that predicted annual mean NO₂, PM₁₀ and PM_{2.5} concentrations were below the relevant AQOs and Concentration

²⁵ Land-Use Planning & Development Control: Planning for Air Quality, IAQM, 2017.

Target at all building façades. As such, the site is considered suitable for the proposed end use from an air quality perspective.

8.1.7 A number of mitigation measures were identified in line with the requirements of MCC's 'Air Quality and Planning Technical Guidance' in order to reduce vehicle exhaust emissions associated with the proposals. It is considered these are appropriate for a development of this scale and nature and will further control impacts during the operational phase.

8.1.8 Based on the assessment results, air quality factors are not considered a constraint to planning consent for the development.

9.0 **ABBREVIATIONS**

AADT	Annual Average Daily Traffic
AQLV	Air Quality Limit Value
AQMA	Air Quality Management Area
AQO	Air Quality Objective
AQS	Air Quality Strategy
ASR	Annual Status Report
CAP	Clean Air Plan
CERC	Cambridge Environmental Research Consultants
CHP	Combined Heat and Power
DEFRA	Department for Environment, Food and Rural Affairs
DfT	Department for Transport
DPD	Development Plan Document
EV	Electric Vehicle
GMCA	Greater Manchester Combined Authority
HDV	Heavy Duty Vehicle
IAQM	Institute of Air Quality Management
LA	Local Authority
LAQM	Local Air Quality Management
MCC	Manchester City Council
NGR	National Grid Reference
NO ₂	Nitrogen dioxide
NO _x	Oxides of nitrogen
NPPF	National Planning Policy Framework
NPPG	National Planning Policy Guidance
PM ₁₀	Particulate matter with an aerodynamic diameter of less than 10µm
PM _{2.5}	Particulate matter with an aerodynamic diameter of less than 2.5µm
PfEP	Places for Everyone Plan
SP	Slow Phase
TfGM	Transport for Greater Manchester
Z ₀	Roughness length

Figures



Legend



Site Boundary

Title

Figure 1 - Site Location Plan

Project

Air Quality Assessment
Chapman Street, Gorton

Project Reference

10418

Client

3DReid Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075





Legend



Site Boundary



Proposed Building



Annual Mean
NO₂
Concentration
(µg/m³)

Title

Figure 3 - Predicted Annual Mean
NO₂ Concentrations (µg/m³)

Project

Air Quality Assessment
Chapman Street, Gorton

Project Reference

10418


Client

3DReid Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075

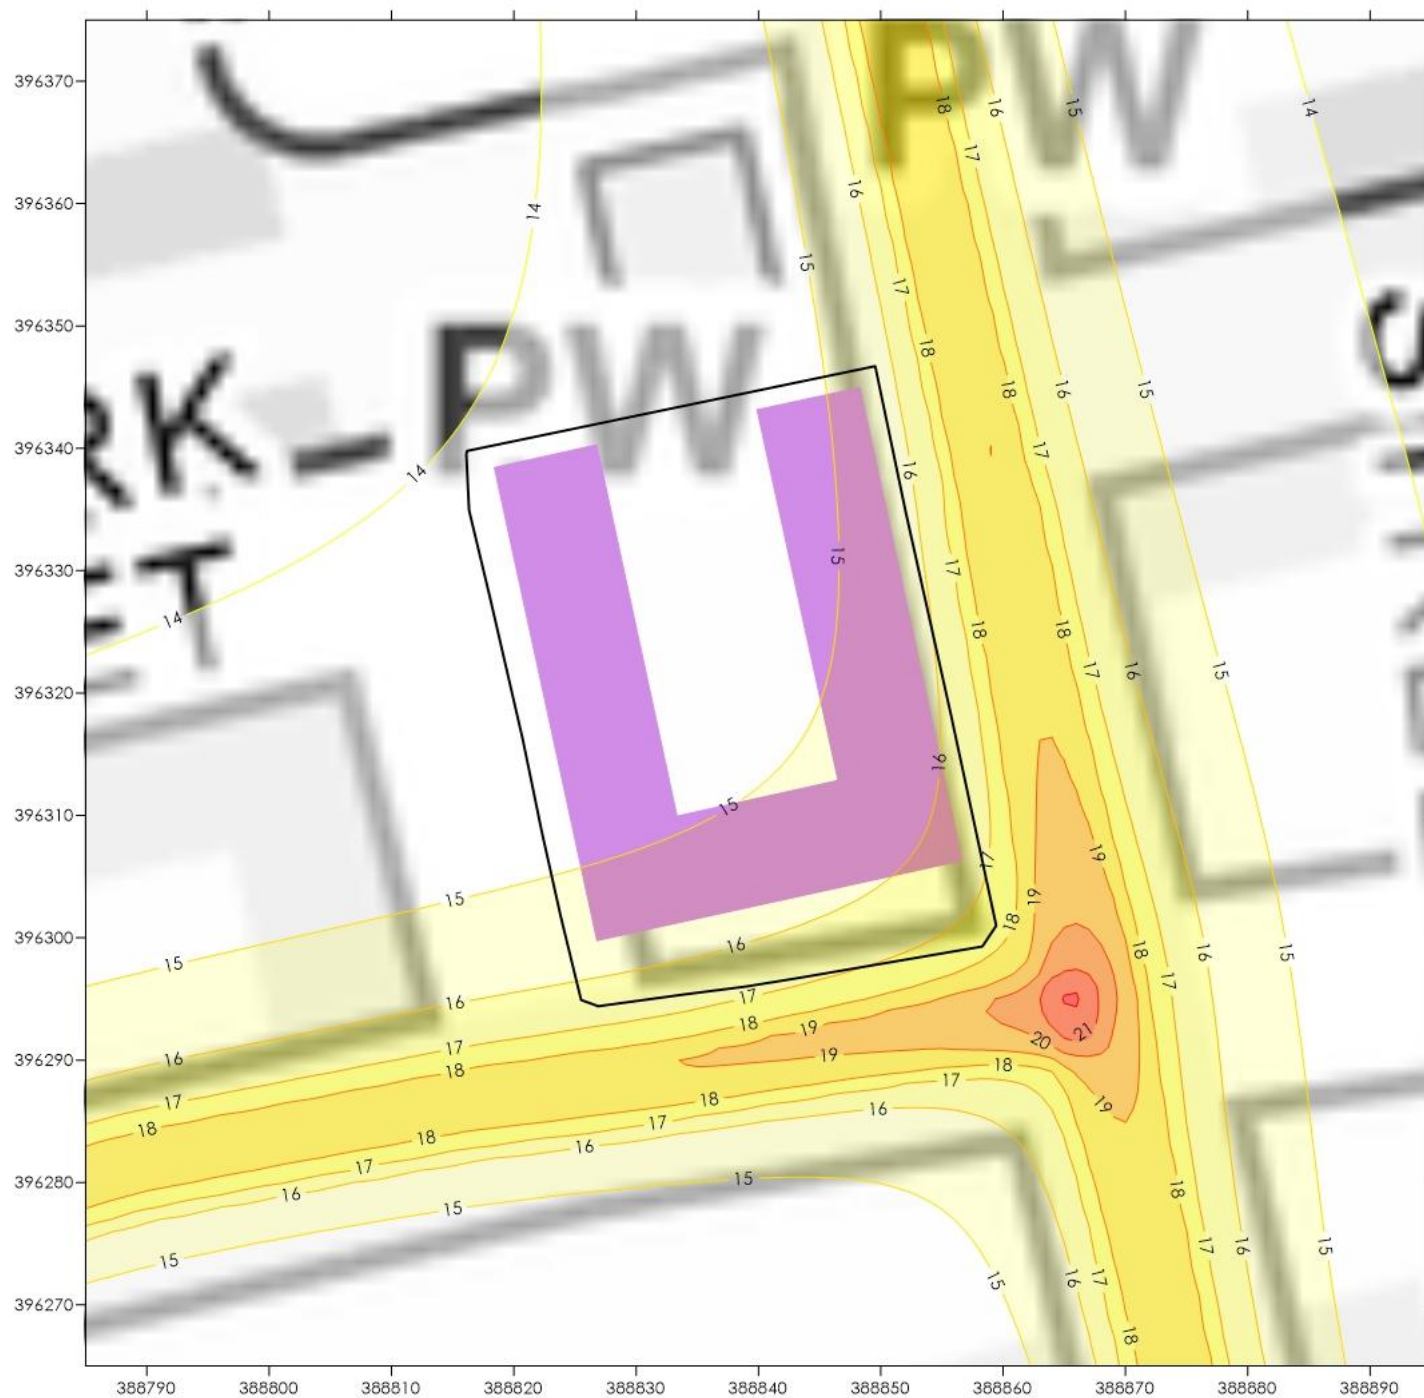

Legend



Site Boundary



Proposed Building



Annual Mean
PM₁₀
Concentration
(µg/m³)

Title

Figure 4 - Predicted Annual Mean
PM₁₀ Concentrations (µg/m³)

Project

Air Quality Assessment
Chapman Street, Gorton

Project Reference

10418


Client

3DReid Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075

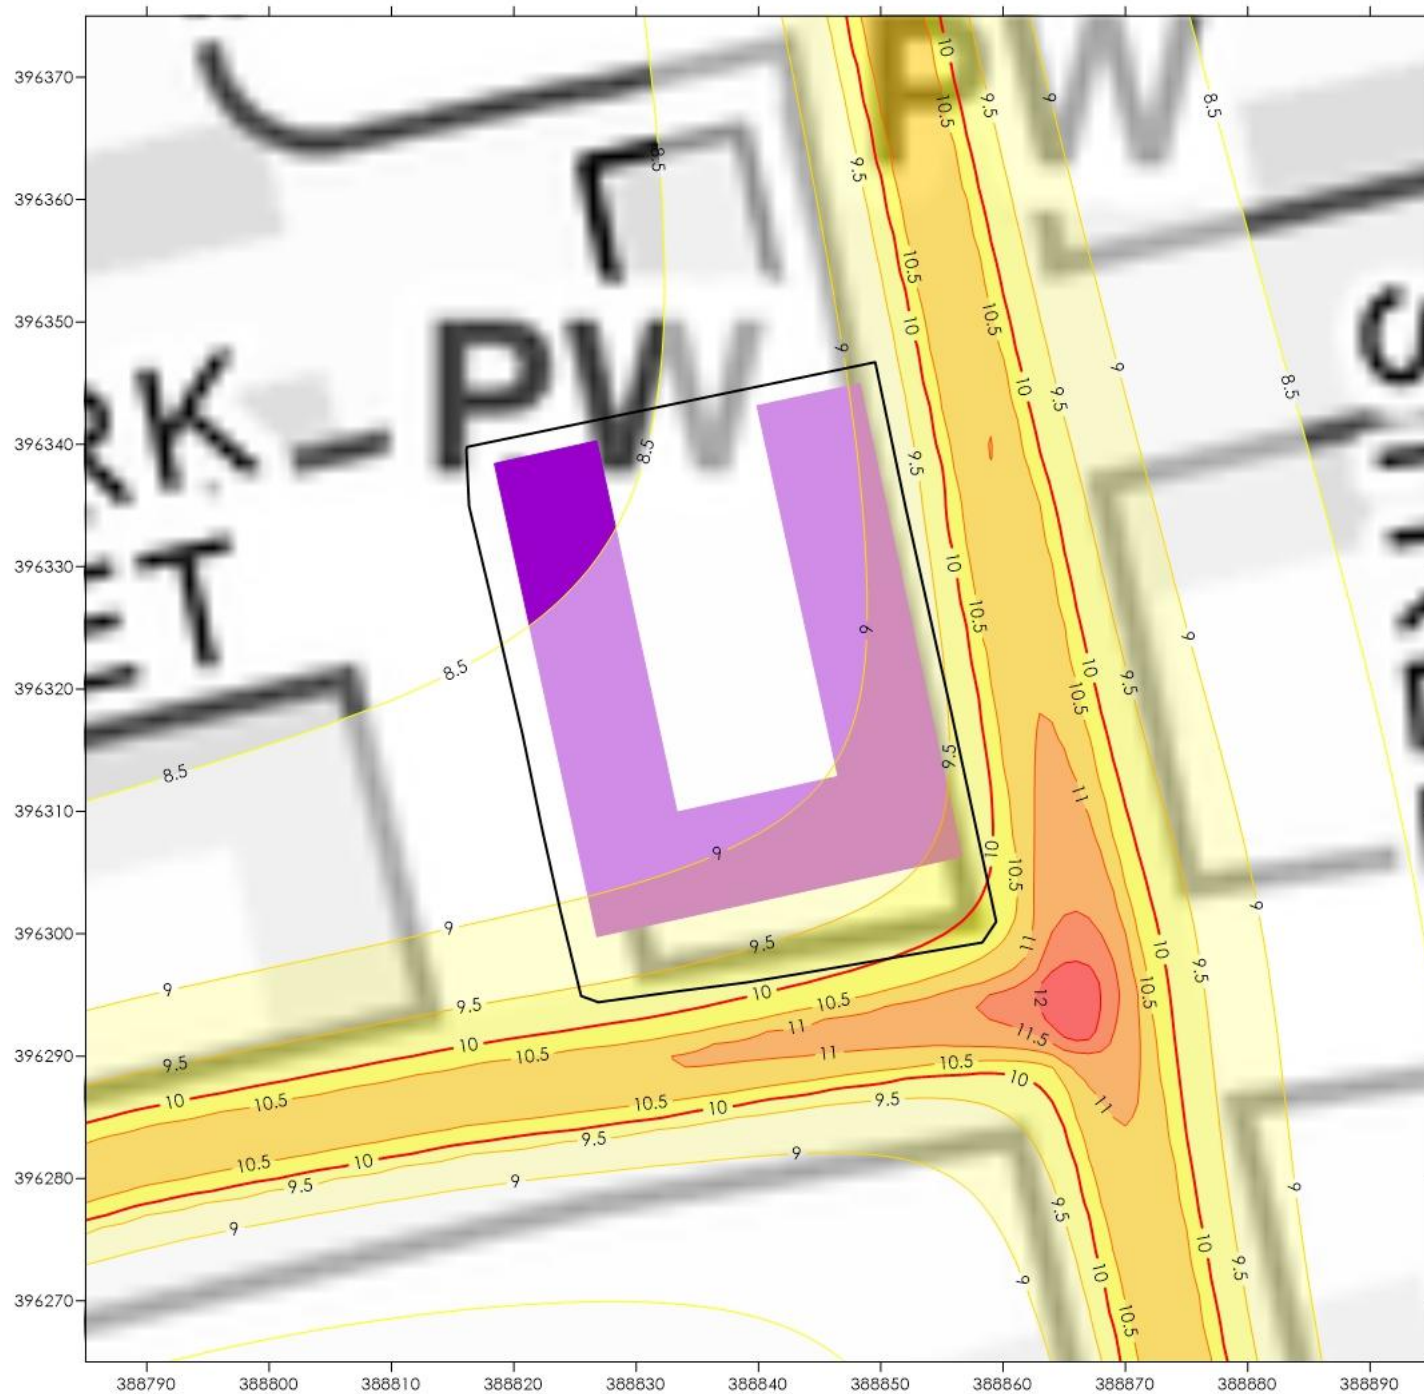


Legend



Site Boundary



Proposed Building



Annual Mean
PM_{2.5}
Concentration
(µg/m³)

Title

Figure 5 - Predicted Annual Mean
PM_{2.5} Concentrations (µg/m³)

Project

Air Quality Assessment
Chapman Street, Gorton

Project Reference

10418


Client


3DReid Limited

Contains Ordnance Survey Data
© Crown Copyright and Database Act 2023



www.red-env.co.uk | 0161 7060075

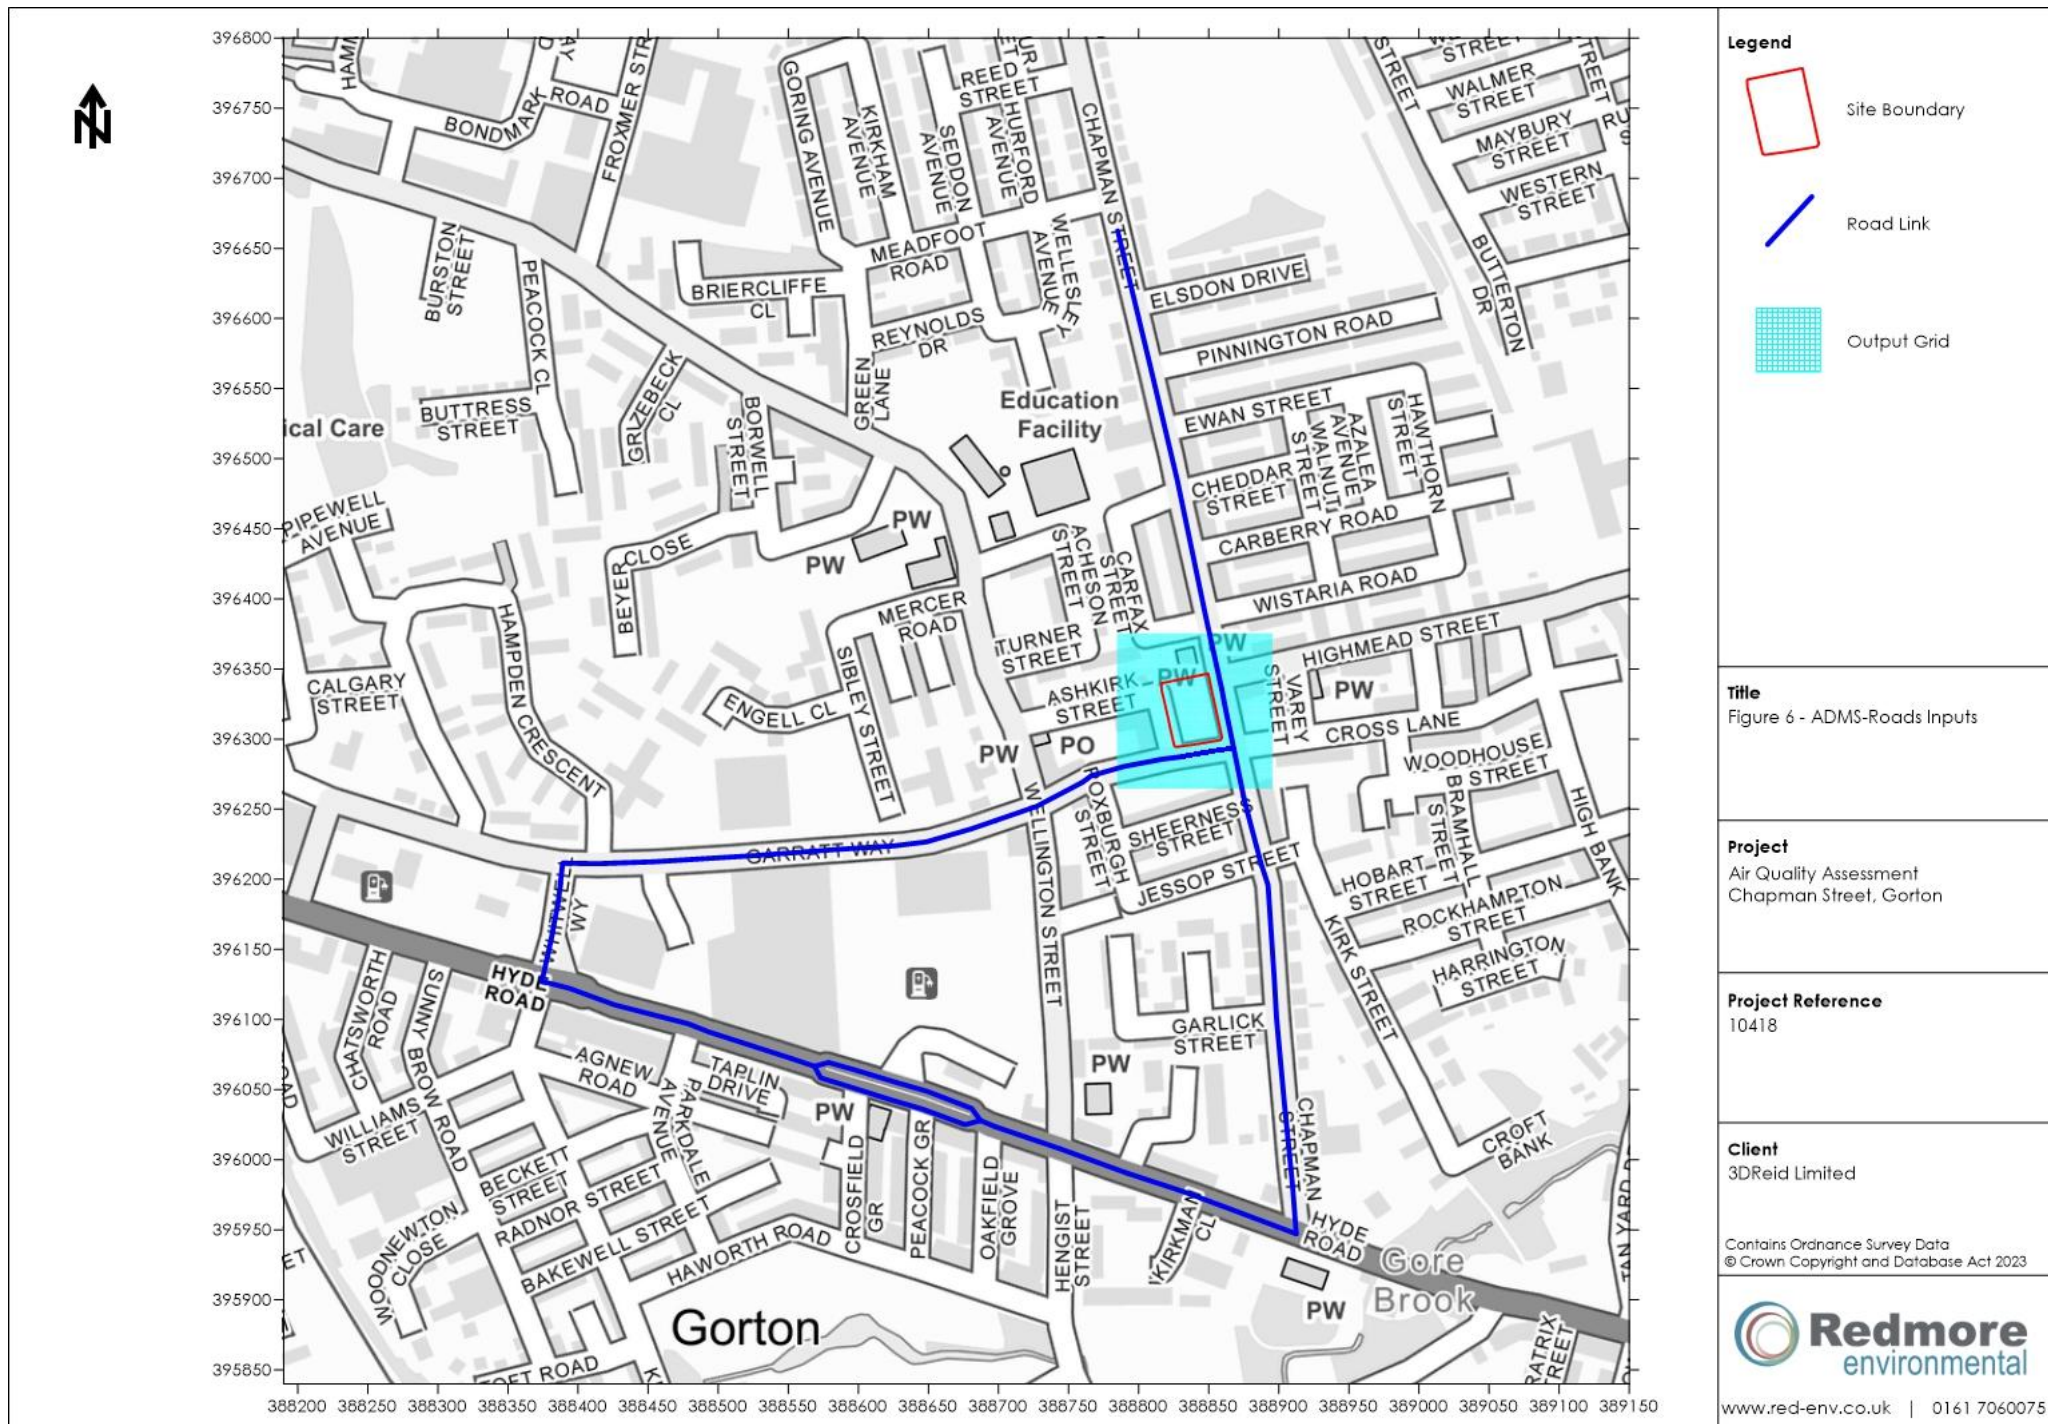

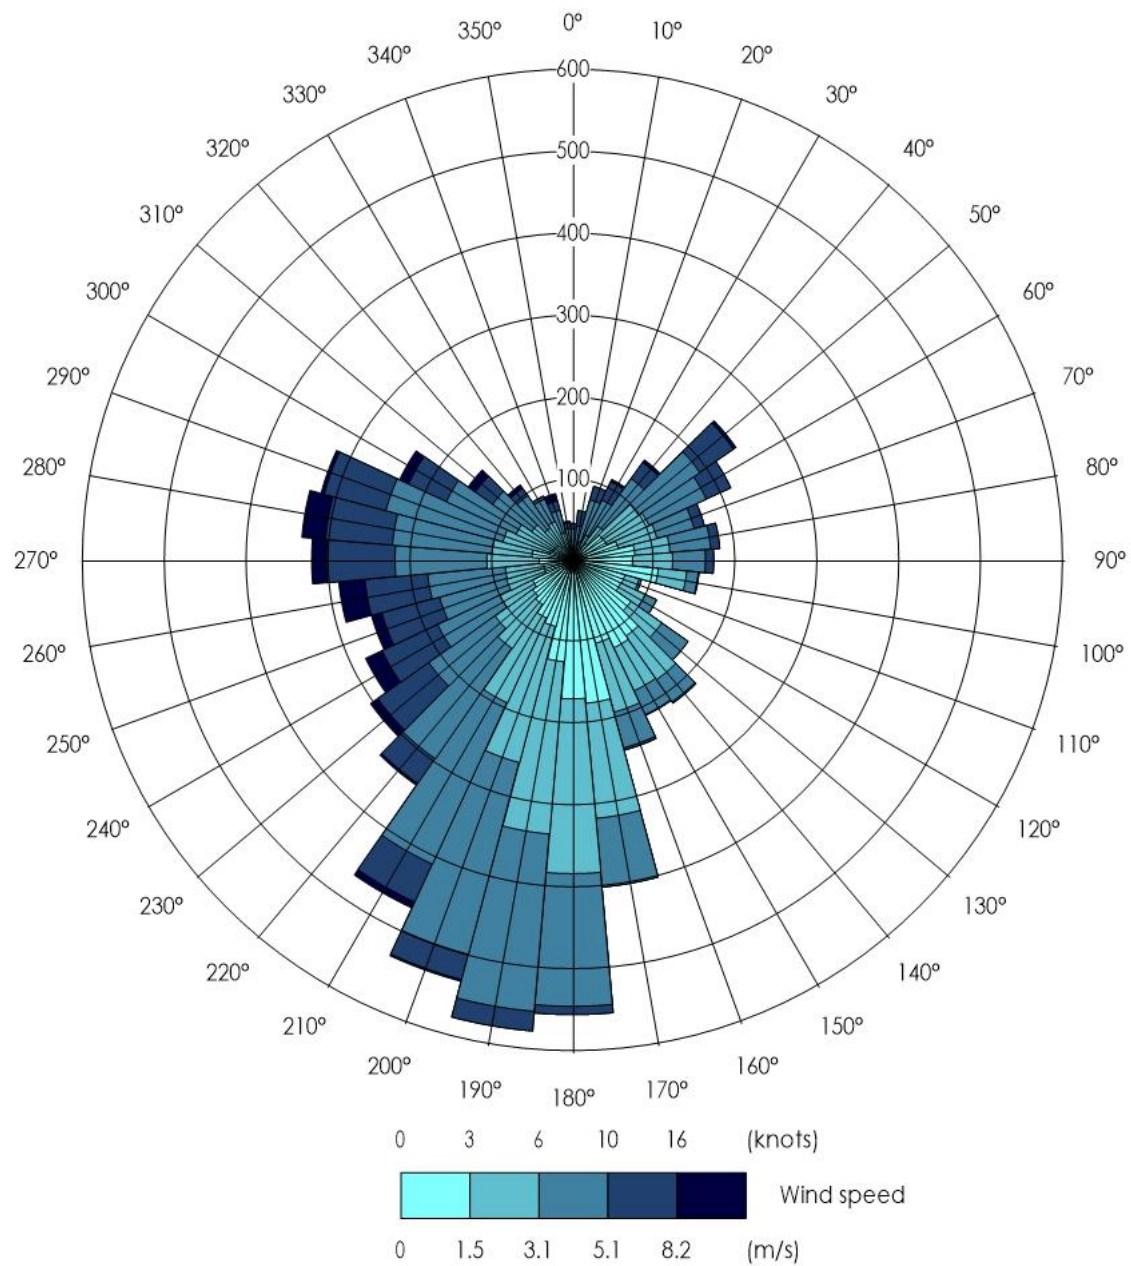

Legend

Title
Figure 7 - Wind Rose of 2024
Manchester Airport Meteorological
Data

Project
Air Quality Assessment
Chapman Street, Gorton

Project Reference
10418

Client
3DReid Limited

Appendix 1 - Assessment Input Data

Introduction

The proposal has the potential to expose future residents to any existing air quality issues as a result of road vehicle exhaust emissions in the vicinity of the site. In order to assess NO₂, PM₁₀ and PM_{2.5} concentrations across the development, detailed dispersion modelling was undertaken in accordance with the following methodology.

Dispersion Model

Dispersion modelling was undertaken using the ADMS-Roads dispersion model (version 5.1.0.2). ADMS-Roads is developed by Cambridge Environmental Research Consultants (CERC) and is routinely used throughout the world for the prediction of pollutant dispersion from road sources. Modelling predictions from this software package are accepted within the UK by the Environment Agency and DEFRA.

The model requires input data that details the following parameters:

- Assessment area;
- Traffic flow data;
- Vehicle emission factors;
- Spatial co-ordinates of emissions;
- Street width;
- Meteorological data;
- Roughness length (z_0); and,
- Monin-Obukhov length.

The relevant inputs are detailed in the following Sections.

Assessment Area

Ambient concentrations were predicted over the area NGR: 388785, 388895 to 396265, 396375. One Cartesian grid was used within the model to produce data suitable for contour plotting using the Surfer software package. It should be noted that although the grid only covered the proposed site, road links were extended in order to ensure the impact of all relevant vehicle emissions in the vicinity of the development were considered.

Reference should be made to Figure 6 for a graphical representation of the assessment grid extents.

Traffic Flow Data

Baseline traffic data for use in the assessment, including 24-hour AADT flows and fleet composition as HDV proportion, was obtained from the Department for Transport (DfT)²⁶. The DfT web tool enables the user to view and download traffic flows on every link of the 'A' road and motorway network, as well as selected minor roads, in Great Britain for the years 1999 to 2024. It should be noted that the DfT web tool is referenced in DEFRA guidance²⁷ as being a suitable source of data for air quality assessments and it is therefore considered to provide a reasonable estimate of traffic flows in the vicinity of the site.

The baseline traffic data was converted to the site opening year utilising a factor obtained from TEMPro (version 8.0). This software package has been developed by the DfT to calculate future traffic growth throughout the UK.

Road parameters for input into the model were based on the following:

- Road widths were estimated from aerial photography and UK highway design standards;
- Vehicle speeds were estimated as an average for the relevant road link over the course of a 24-hour period;
- Vehicle speeds were determined following review of speed limits within the study extents, as well as congestion data available from GoogleMaps;
- Vehicle speeds specific to slow phases were determined using the methodology outlined in the DEFRA guidance²⁸;
- Necessary adjustments to slow phase vehicle speeds were based upon congestion data available from GoogleMaps; and,
- The length for slow phases were derived using the approaching distance of 25m outlined in the DEFRA guidance²⁹, and adjusted accordingly based on aerial photography and congestion data available from GoogleMaps.

²⁶ <https://roadtraffic.dft.gov.uk/#6/55.254/-11.107/basemap-regions-countpoints.7>

²⁷ Local Air Quality Management (TG22) Technical Guidance, DEFRA, 2022.

²⁸ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

²⁹ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

A summary of the traffic flow data a road parameters is provided in Table A1.1.

Table A1.1 Traffic Data

Link		24-hour AADT Flow		HDV Prop. of Fleet (%)	Road Width (m)	Avg. Vehicle Speed (km/h)
		2024	2027			
L1	Chapman Street	8,408	8,682	4.72	6.5	30
L2	Chapman Street Slow Phase (SP)	8,408	8,682	4.72	7.8	15
L3	Chapman Street, south of Sheerness Street	8,408	8,682	4.72	8.5	30
L4	Hyde Road	27,482	28,381	5.11	10.8	45
L5	Hyde Road SP	27,482	28,381	5.11	11.1	15
L6	Hyde Road Westbound SP	14,023	14,482	4.88	8.4	15
L7	Hyde Road Eastbound SP	13,458	13,898	5.35	7.8	15
L8	Hyde Road, west of Crosfield Grove SP	27,482	28,381	5.11	15.2	15
L9	Garratt Way	8,408	8,682	4.72	8.6	30
L10	Garratt Way SP	8,408	8,682	4.72	10.3	15
L11	Cross Lane	8,408	8,682	4.72	6.5	30
L12	Cross Lane SP	8,408	8,682	4.72	6.2	15

Reference should be made to Figure 6 for a graphical representation of the road link locations.

Emission Factors

Emission factors were calculated using the relevant traffic flows and the Emission Factor Toolkit (version 13.1). This has been produced by DEFRA and incorporates COPERT 5.8 vehicle emission factors and fleet information.

Meteorological Data

Meteorological data used in the assessment was taken from Manchester Airport meteorological station over the period 1st January 2024 to 31st December 2024 (inclusive). Manchester Airport is located at NGR: 382073, 385035 which is approximately 14.1km south-west of the development. It

is anticipated that conditions would be reasonably similar over a distance of this magnitude. The data was therefore considered suitable for an assessment of this nature.

All meteorological records used in the assessment were provided by Atmospheric Dispersion Modelling (ADM) Ltd, which is an established distributor of data within the UK. Reference should be made to Figure 7 for a wind rose of the utilised meteorological data.

Roughness Length

The z_0 is a modelling parameter applied to allow consideration of surface height roughness elements. A z_0 of 0.5m was used to describe the modelling extents. This is considered appropriate for the morphology of the area and is suggested within ADMS-Roads as being suitable for 'parkland, open suburbia'.

A z_0 of 0.2m was used to describe the meteorological site. This value is considered appropriate for the morphology of the area due to the large expanse of surrounding flat land use, such as runways and surrounding grassland, and is suggested within ADMS-Roads as being suitable for 'agricultural areas (min)'.

Monin-Obukhov Length

The Monin-Obukhov length provides a measure of the stability of the atmosphere. A minimum Monin-Obukhov length of 30m was used to describe the modelling extents and meteorological data. This value is considered appropriate for the nature of both areas and is suggested within ADMS-Roads as being suitable for 'cities and large towns'.

Background Concentrations

Background NO_2 , PM_{10} and $\text{PM}_{2.5}$ concentrations for the opening year 2027 used in the assessment were obtained from the DEFRA mapping study for the grid square containing the site, as shown in Table 10.

NO_x to NO_2 Conversion

Predicted annual mean NO_x concentrations were converted to NO_2 concentrations using the spreadsheet (version 9.1) provided by DEFRA, which is the method detailed within DEFRA

guidance³⁰.

Verification

The predicted results from a dispersion model may differ from measured concentrations for a large number of reasons, including:

- Estimates of background concentrations;
- Uncertainties in source activity data such as traffic flows and emission factors;
- Variations in meteorological conditions;
- Overall model limitations; and,
- Uncertainties associated with monitoring data, including locations.

Model verification is the process by which these and other uncertainties are investigated and where possible minimised. In reality, the differences between modelled and monitored results are likely to be a combination of all of these aspects.

For the purpose of the assessment, model verification was undertaken for 2024 using traffic data, meteorological data and monitoring results from this year.

Monitoring of NO₂ concentrations was undertaken at one location within the vicinity of roads included in the dispersion model during 2024. The result was obtained and the road contribution to total NO_x concentration calculated following the methodology contained within DEFRA guidance³¹. The monitored annual mean NO₂ concentration and calculated road NO_x concentration are summarised in Table A1.2.

Table A1.2 NO_x Verification - Monitoring Result

Monitoring Location		Monitored NO ₂ Concentration (µg/m ³)	Calculated Road NO _x Concentration (µg/m ³)
MA73NO	Hyde Road	28.0	30.24

The annual mean road NO_x concentration predicted from the dispersion model and the 2024 road NO_x concentration calculated from the monitoring results are summarised in Table A1.3.

³⁰ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

³¹ Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Table A1.3 NO_x Verification - Modelling Result

Monitoring Location		Calculated Road NO _x Concentration (µg/m ³)	Modelled Road NO _x Concentration (µg/m ³)
MA73NO	Hyde Road	30.24	10.00

The monitored and modelled road NO_x concentrations were compared to calculate the associated ratio. This indicated that a verification factor of 3.0242 was required to be applied to all modelling results.

Monitoring of PM₁₀ and PM_{2.5} concentrations is not undertaken within the assessment extents. The NO_x verification factor was therefore used to adjust model predictions of these species in lieu of more accurate data in accordance with DEFRA guidance³².

³² Local Air Quality Management Technical Guidance (TG22), DEFRA, 2022.

Date: 28th January 2026

Ref: 10418

Appendix 2 - Curricula Vitae

KEY EXPERIENCE:

Claire is a Director with specialist experience in the air quality sector

Her key capabilities include:

- Production and management of Air Quality, Dust and Odour Assessments for a wide range of clients from the residential, retail, commercial, leisure and industrial and infrastructure sectors.
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads, ADMS-6 and AERMOD. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Assessment of fugitive dust impacts from a range of waste and industrial developments.
- Co-ordination and management of large-scale multi-disciplinary projects and submissions.
- Undertaken and overseeing pollutant monitoring campaigns.
- Provision of expert advice and attendance at DCO examination process.

SELECT PROJECTS SUMMARY:

Residential and Educational

Air Quality Assessments for a large number of proposed residential and educational developments across the UK. The assessments included consideration of construction phase dust emissions and mitigation was recommended to minimise fugitive dust emissions accordingly. The suitability of the sites for the proposed residential and educational uses was also assessed. The assessment utilised a range of assessment tools including relevant screening criteria, air dispersion modelling using ADMS-Roads, local air quality monitoring and Defra published assessment tools. Where required for sites in London, Air Quality Neutral assessments were also undertaken utilised the Greater London Authority guidance.

Air Quality Monitoring

Air Quality Assessments and overseeing air quality monitoring campaigns for a number of sites within Birmingham. Air dispersion modelling was undertaken and air quality monitoring utilising NO₂ diffusion tubes was carried out for use in verification of the dispersion model. Mitigation was recommended where appropriate to reduced the exposure of future uses of the sites to elevated pollutant concentrations.

Odour Assessments

Undertaken to support developments in the UK, including consideration of the impact of existing odour sources on proposed developments or to assess proposed odour releases. A combination of field odour surveys, risk assessments and detailed dispersion modelling were undertaken, with mitigation measures recommended where required.

Commercial and Retail

Foodstores across the UK - Air quality assessments for a number of proposed foodstores across the UK. Consideration was given to construction phase dust emissions and vehicle emissions generated by the foodstore operations. Relevant screening criteria and detailed air dispersion modelling were utilised in the assessment. Mitigation was recommended as required to minimise construction phase dust emissions.

Commercial development,

Workshop - Air quality assessment and input into the EIA for a proposed large scale commercial development near Workshop. Assessments of construction phase dust and operational phase road traffic emissions were undertaken and consideration was given to both human and ecological receptors.

Industrial and Infrastructure

Greater Manchester Waste PFI

Contract - Air Quality and Odour Assessments were undertaken as part of the Planning Applications and Environmental Permit applications for a number of proposed waste facilities in Greater Manchester.

Energy from Waste Development,

Scotland - Air Quality Assessment and coordination of the EIA and Environmental Permit Application for a proposed Energy from Waste development in Scotland. Considered industrial emissions from flue stacks as well as additional road traffic movements generated by the development

Strategic Rail Freight Interchange,

Hinckley - oversaw the Air Quality Assessment for the proposed Rail Freight Interchange and acted as expert witness as part of the Development Consent Order (DCO) examination process.

KEY EXPERIENCE:

Megan is an Environmental Consultant with specialist experience in the air quality sector. Her key capabilities include:

- Production of Air Quality Assessments in accordance with Department for Environment, Food and Rural Affairs (DEFRA) methodologies for a range of residential, commercial and industrial sectors.
- Detailed dispersion modelling of road vehicle exhaust emissions using ADMS-Roads. Studies have included impact assessments on sensitive receptors and exposure of new residents to poor air quality.
- Advanced Canyon Modelling to evaluate the impact of altered urban topography on air quality in built up areas.
- Assessment of construction dust impacts from a range of development sites.
- Production of Air Quality Neutral Assessments in accordance with The London Plan.
- Installation and management of diffusion tube monitoring campaigns in order to determine the potential for exposure of sensitive receptors to poor air quality.

SELECT PROJECTS SUMMARY:

Whitebirk, Blackburn

Air Quality Assessment in support of a residential development comprising demolition of existing buildings and construction of 152 dwellings on land at the Whitebirk Estate, Blackburn. The development had the potential to expose future occupants to any existing air quality issues and cause impacts at sensitive locations. Dispersion modelling was undertaken using ADMS-Roads. A construction dust assessment was also performed to provide mitigation for proposed dust generating activities. Results of the study indicated that air quality impacts and fugitive dust emissions were not significant.

Willow Lane, Mitcham

Air Quality Assessment in support of an industrial development off Willow Lane, Mitcham. Due to the size of the development, it was possible that traffic generated from the scheme may cause negative impacts on sensitive receptors nearby. NO₂ and PM₁₀ concentrations were quantified at specific receptor points to ensure there would be no significant increases in pollution levels. Results revealed negligible impacts at all locations. An Air Quality Neutral Assessment was also undertaken in accordance with the London Plan. Following implementation of relevant mitigation measures, the development was considered Air Quality Neutral.

Harrow Road, London

Air Quality Assessment in support of a nursery. Detailed dispersion modelling, including advanced canyon inputs, was undertaken to evaluate the potential for exposure of future occupants to any existing issues at the site. The results indicated air quality conditions did not present an issue to planning consent.

The Green, Cheadle

Air Quality Assessment in support of a new Aldi store off the Green, Cheadle. Following concerns from the Local Authority regarding the potential for traffic generated by the proposals to cause air quality impacts, dispersion modelling was undertaken in order to quantify changes in pollutant concentrations at sensitive locations in the vicinity of the site. Results revealed negligible impacts at all locations.

Holloway Road, London

Kitchen Odour Assessment undertaken in line with the EMAQ+ and DEFRA guidance in support of a new restaurant on Holloway Road, London. Site-specific odour abatement options were identified in order to conform with best practice guidance. Based on the inclusion of the specified mitigation, odour effects associated with the development were not considered a constraint to planning consent.

Wyebridge Motors, Hereford

Ambient Air Quality Monitoring in support of a residential development. The Local Authority raised concerns regarding the exposure of future residents to poor air quality as a result of pollution from the adjacent A49. Due to the irregular topography of the area, a scheme of diffusion tube monitoring was undertaken to determine baseline NO₂ concentrations at the site. Results indicated that concentrations were below the Air Quality Objective at the building façade and as such, the risk for exposure of future residents to poor air quality was not considered significant.

KEY EXPERIENCE:

Lauren is an Associate with special experience in the air quality sector. Her key capabilities include:

- Undertaking and managing a variety of air quality projects in a range of sectors including residential, student accommodation, educational, commercial and industrial projects
- Detailed dispersion modelling of road vehicle and industrial emissions using ADMS-Roads and ADMS-6. Studies have included impact assessment of ground level pollutant and odour concentrations and assessment of suitability of development sites for proposed end-use.
- Project management and co-ordination of Environmental Impact Assessments and scoping reports for developments throughout the UK.
- Co-ordination and management of multi-disciplinary projects and submissions.
- Assessment of fugitive dust impacts from a range of mineral extraction developments.
- Production of air quality mitigation strategies specifically tailored to address issues at individual sites.
- Active STEM Ambassador role, working with local schools to educate about air quality.

SELECT PROJECTS SUMMARY:

Norton Lodge, Malton

An ES Chapter and technical appendix were supplied to support this EIA development. The development comprised a new link road and therefore required multiple assessment scenarios. The Chapter also looked at impacts at ecological designations, impacts with an AQMA, odour from neighbouring facilities and impacts on proposed receptors. The AQMA in Malton was a particular concern for the council. The overall impact was considered to be not significant.

Yorkshire Post Phase 2, Leeds

An Air Quality Assessment to support each of the three proposed towers which form part of the Yorkshire Post Phase 2. These high-rise buildings were proposed for student accommodation and commercial uses. In addition to following LAQM.TG(22) and EPUK&IAQM guidance, the West Yorkshire Low Emissions Strategy (WYLES) Air Quality & Emissions Technical Planning Guidance was followed. Due to the 'Major' development classification in line with the WYLES guidance, damage costs for each tower were calculated. Mitigation measures were suggested. The energy strategy for the development was for a connection to the Leeds PIPES local heating district network. The scheme was approved.

Old Hall Street, Liverpool

An Air Quality Assessment to support a student accommodation development. The scheme is 'car free' and trips generated dispersed to below the threshold once off Old Hall Street. The Site was considered suitable for residential use.

Viadux Phase 2, Manchester

Environmental Impact Assessment to support a high-rise residential led scheme in the city centre. The assessment included both operational and construction phase impacts. Impacts with both phases were considered to be 'not significant'. Additionally, in line with Manchester City Council Air Quality Guidance a Damage Cost calculation was included to ensure that sufficient mitigation was included to reduce air quality impacts as much as possible.

Plot 9b, First Street, Manchester

An ES Chapter to support the EIA development on land off First Street. The assessment included operational and construction phase impacts, in addition to modelling to ensure site suitability. Additionally, in line with Manchester City Council Air Quality Guidance a Damage Cost calculation was included to ensure that sufficient mitigation was included to reduce air quality impacts as much as possible. This included improving footpaths so that the site linked to other Plots within the wider First Street development. The Chapter concluded that impacts were considered not significant.

Winwick Road, Warrington

Air Quality Assessment for the proposed B2/B8 development in Warrington. Changes in pollution levels were considered at sensitive receptors as a result of trips generated and their distribution across the local area. Results of the dispersion modelling study indicated air quality impacts as a result of the scheme were not significant.