


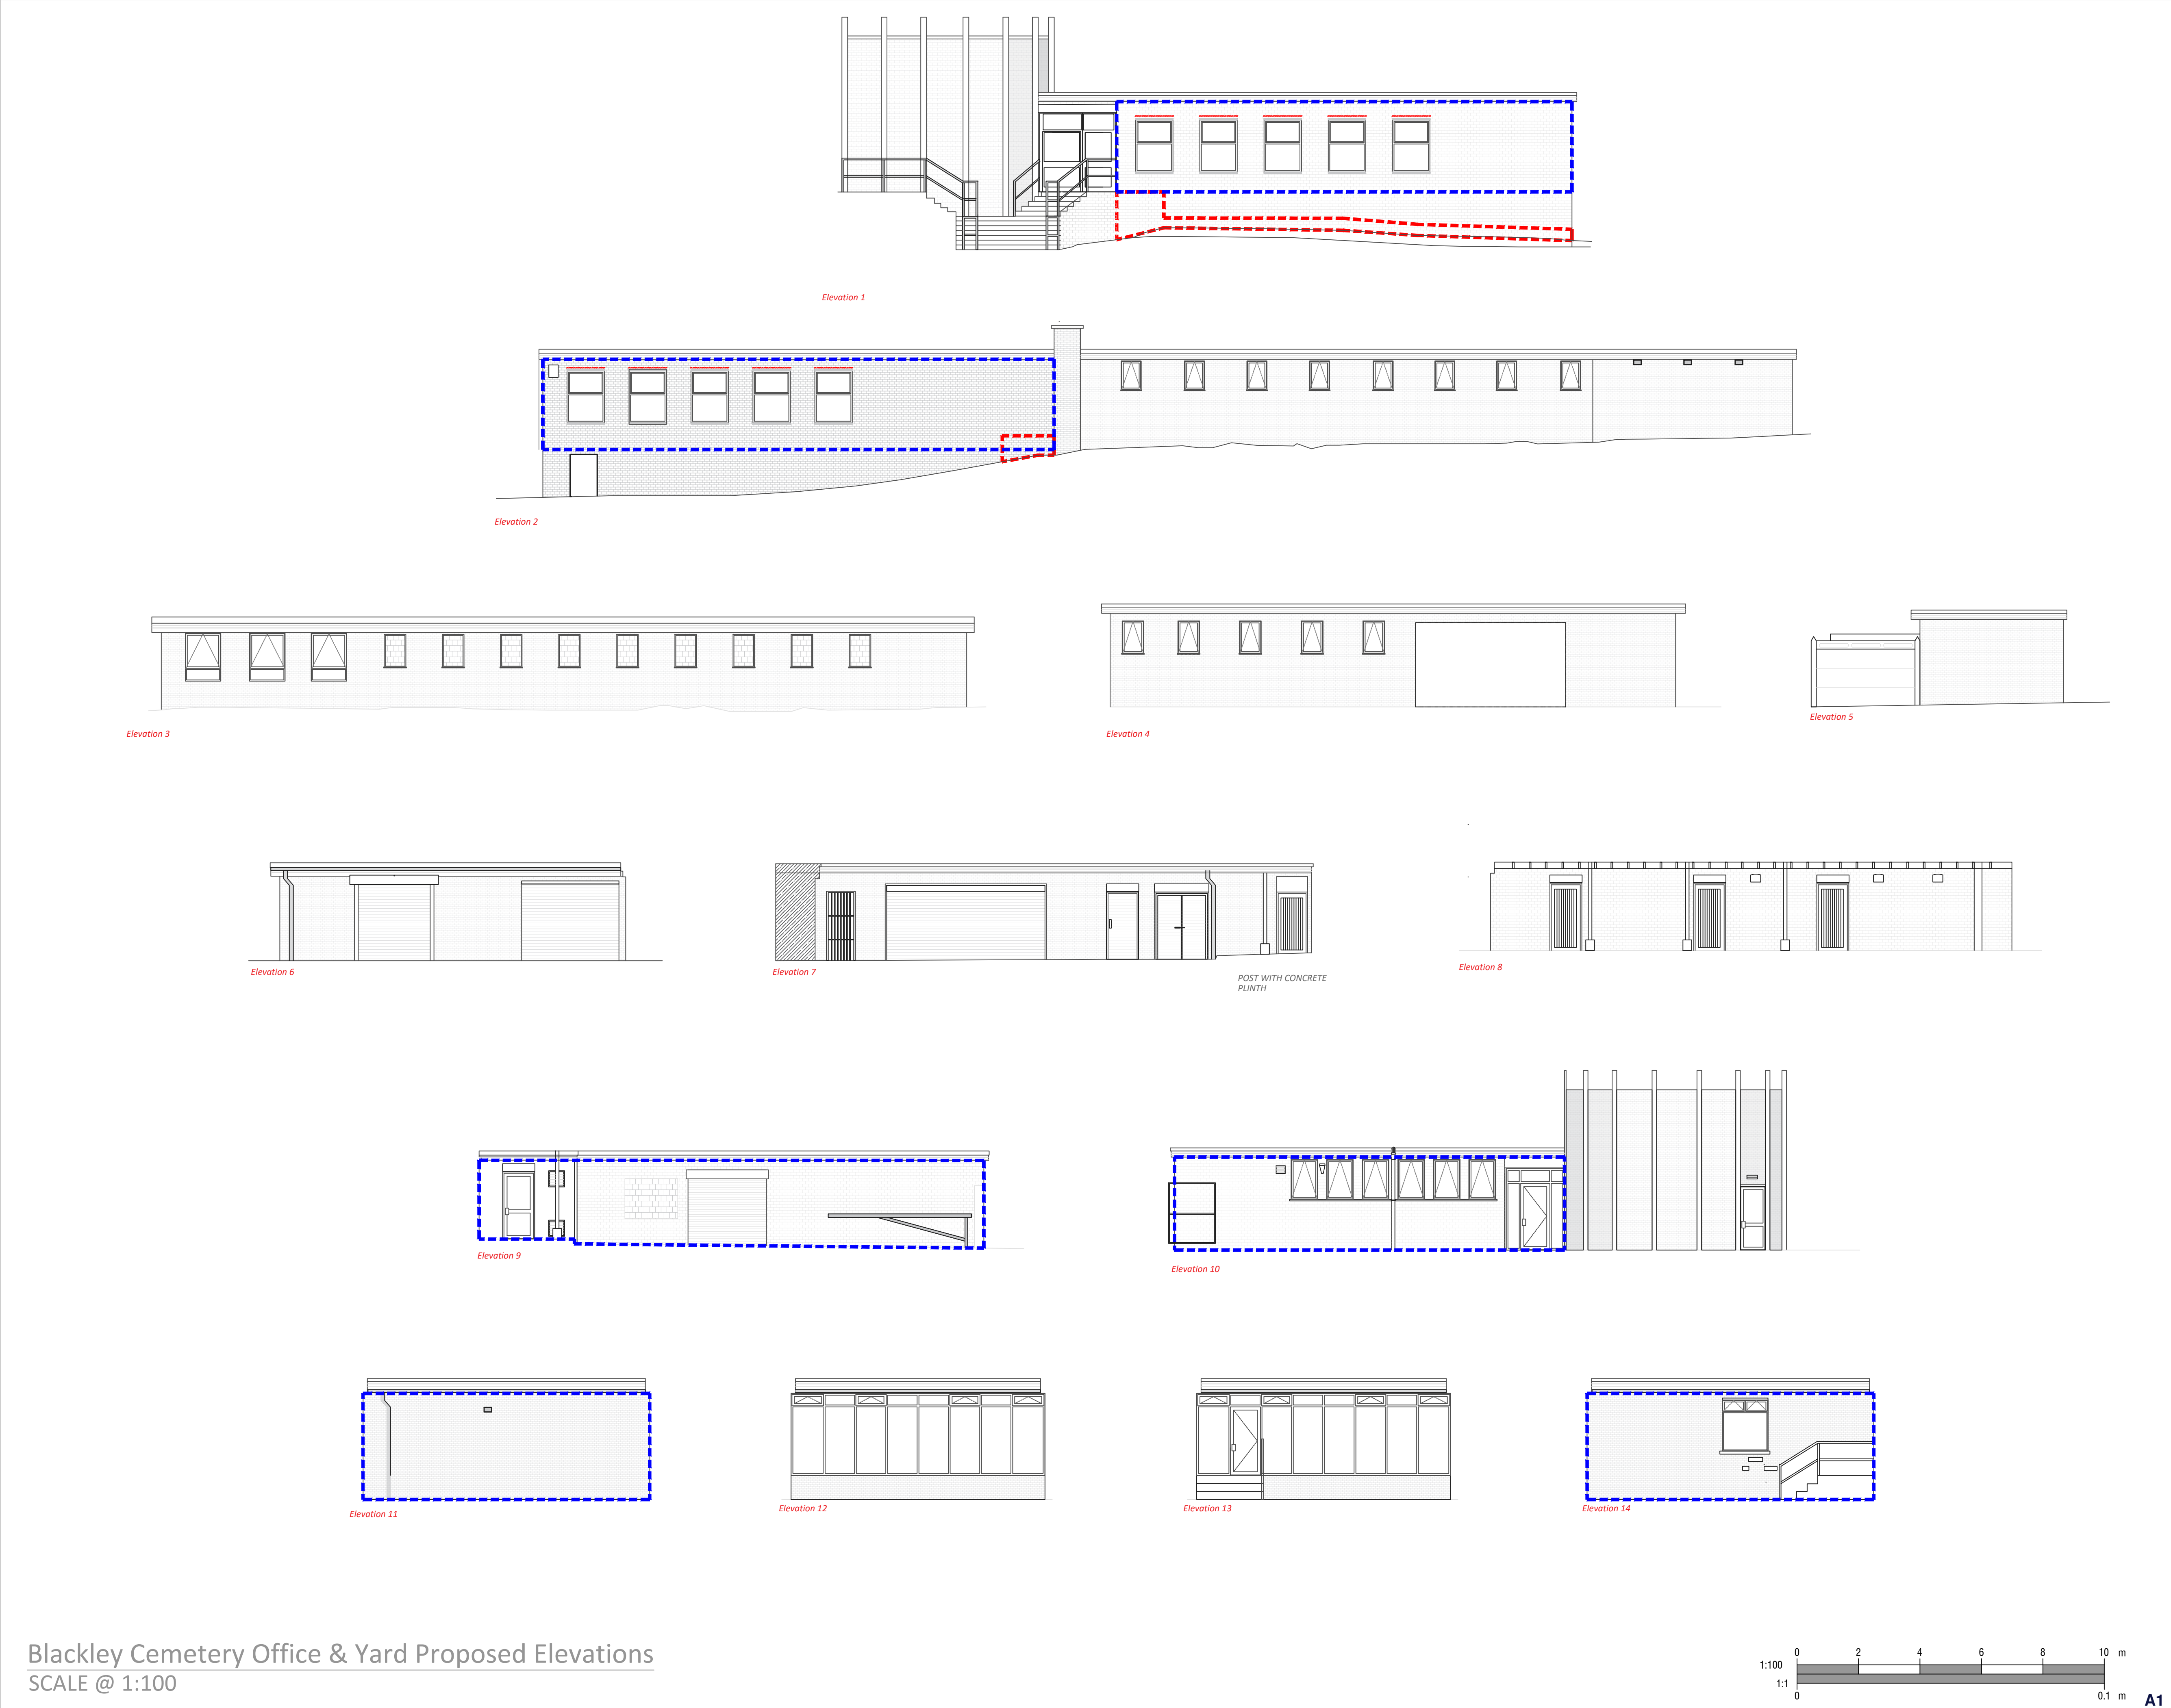

Notes:

E1

E2

E3

E4

E5

E6

E7

E8

E9

E10

E11

E12

E13

E14

NORTH

Supply and install EPS Bead cavity wall insulation in to all existing masonry cavity wall areas to the office section of the building.

Note: No DPC is visible to the Chapel Walls or Yard, as such it is unlikely that a guarantee can be gained in this area and as such is not recommended for insulation.

Existing pointing is to be mechanically raked out using a brick mortar router to a depth of 40mm and repointed using a 1:4 mortar mix made up with matching colour mortar.

Copyright: All rights reserved. This drawing must not be reproduced without permission from Drees & Sommer UK Ltd. Do not scale off this drawing. All dimensions are to be checked on site by contractor / sub contractor. Any discrepancies to be reported to Drees & Sommer UK Ltd.

Drees & Sommer

1.06 South Harrington Building
182 Sefton Street
Liverpool
L3 4BQ
Tel: 0151 430 2340

Office Locations
Aahford, Birmingham, Leeds, Liverpool, London, Manchester & Oxford.
www.dreeso.uk

PLANNING

Rev	Date	Revision notes	By	Check
-				

Client	Drawing Title		
MCC Equans PSDS	Blackley Office & Yard CWI Elevations		

Project Title	Drawn	Date
Decarbonisation Scheme	AH	10/24

	Checked	Date
Blackley Office & Yard	GM	10/24

DWG No.	Scale	Revision
24606.107	1:100	