


49007 – Concealed Guide Rail

Not to scale

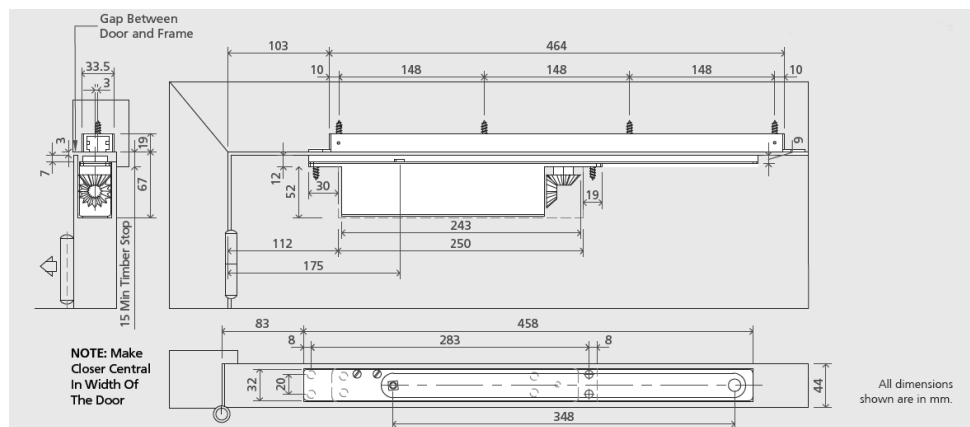

Overview

- Variable power size EN 2-4
- Concealed cam and roller mechanism
- Universal fitting
- Two stage closing speed
- Corrosion Grade 3:
recommended for internal use
- Door width: 550 to 1100mm
- Min door thickness: 44mm - 54mm

Finish options

- Silver (SE)
- Satin Nickel Plate (SNP)
- Polished Nickel Plate (PNP)
- Electro Brass (PVD)
- Antique Brass (AB)
- Satin Brass (SB)
- Black (BK)

Standards

CE & UKCA marked
Fire tested to EN1634

Performance

Fire-tested to EN1634-1

Certifire approved CF5902 and
IFC certification IFCC 1417

Maintenance

- To be carried out by approved specialists only
- A door stop must be fitted to limit the opening of the door
- Regularly check the assembly for tolerance and undue wear
- Tighten any screws or bolts that may become loose and adjust the closer if necessary
- Annually grease the moving parts and check the operation of the doors adjusting if necessary
- Repair works or any replacements have to be executed by the manufacturer or specialists authorised by the manufacturer
- If, for any reason, the product fails due to a defect in manufacture, contact us and we will advise on the replacement procedure

Warranty

Supported by a 2 year warranty

Please note:

Aspex reserves the right to change specification without notice.