


38 Series Lock Cases

Not to scale

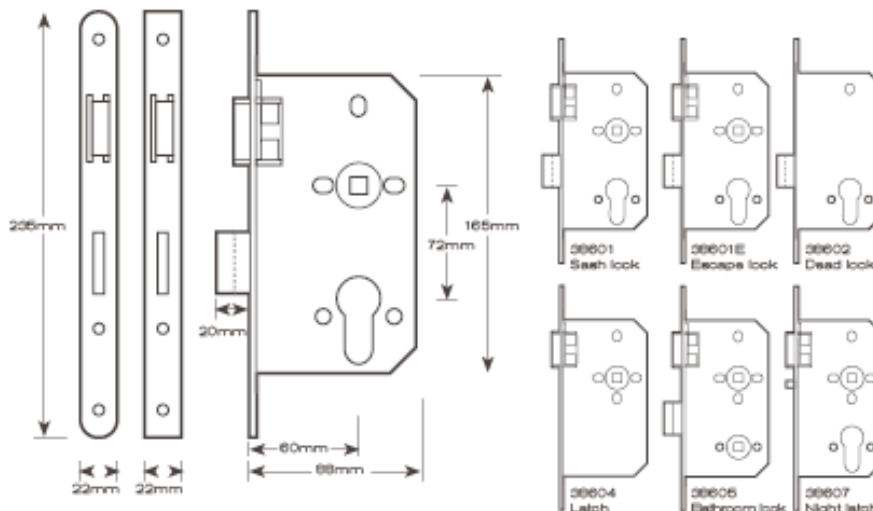

38601 Euro profile sashlock case

38601E Euro profile escape sashlock case

38602 Euro profile deadlock case

38604 Latch

38605 Bathroom lock

38607 Mortice night latch

Overview

- Self adjusting follower is engineered to tightly grip the lever handle spindle
- Heavy duty springing with short travel follower suitable for use with unsprung door furniture
- Double throw 20mm deadbolt
- 72mm to comply with BS8300
- Boxed striking plate
- Suitable for through fixed lever handles and escutcheons
- Reversible latch bolt
- Matching satin stainless steel forend and strike as standard.

Maintenance

- Every 3 months, check the forend, strike plate and cylinder retaining screws are tight. To be carried out by approved specialists only.

Fixings

38mm centre bolt

Handing

Reversible (Left/Right)

Backset

60mm

Follower

8mm

Lockcase depth

90mm

Height

165mm

Lockcase thickness

16mm

Forend

Radius or Square

Forend size

235mm (L) x 19mm (W)

Faceplate & strike

Grade 304 Satin Stainless Steel

CE Marked, Suitable for use on Fire Doors

- Tested to EN 1634-1 2014 on 30 and 60 minute timber fire doors and 240 minute metal fire doors
- For 30 and 60 min fire doors use 1mm interdens behind the strike plate and 2mm interdens around the lockcase

Warranty

Supported by a 2 year warranty

Standards

CE Marked and fully tested to EN 12209 2003

Grade 3 Category of use

High frequency of use by public, with little incentive to exercise care

Certified Approved

BS EN 12209 Classification

BS EN 12209 CE Cert No

CF5543

3X810G-B020

0086-CPR-658466