

SIGN DETAILS




SPECIFICATION

125mm deep built-up aluminium letter trays with 5mm thick 050 opal acrylic front faces, illuminated from premium RGBW colour changeable GE LED modules bonded internally. Inside of letters sprayed white to optimise illumination. Acrylic held in place with a 30 x 30 x 3mm angle retaining rim, screw fixed into letter tray using dome head fixings. Lettering to be fixed to tower as shown with specialist fixing detail to be developed at design stage. Any additional primary steel required to be provided by others, Ascot to provide aluminium secondary framing/top-hats to give secure fix through the mesh. Power to be provided to signage locations by others Ascot to make final connections within IP rated connection box.

- Note: 1 x 13amp supply in IP Housing on the roof (within a 10m radius of the sign) required to power the sign By others.
- The sign will have its own dusk and dawn sensor, provided by Ascot.
- CC to provide details of using the level 7 distribution board for power and IP housing on the roof.
- Handheld controllers for each letter for the colour - RGBW (manually able to change) to be provided by Ascot.

Fixing:	Concealed mechanical fixings
Quantity:	1
Font:	as per logo
Colours:	Refer to key

SIGN LETTER CASE BUILDUP

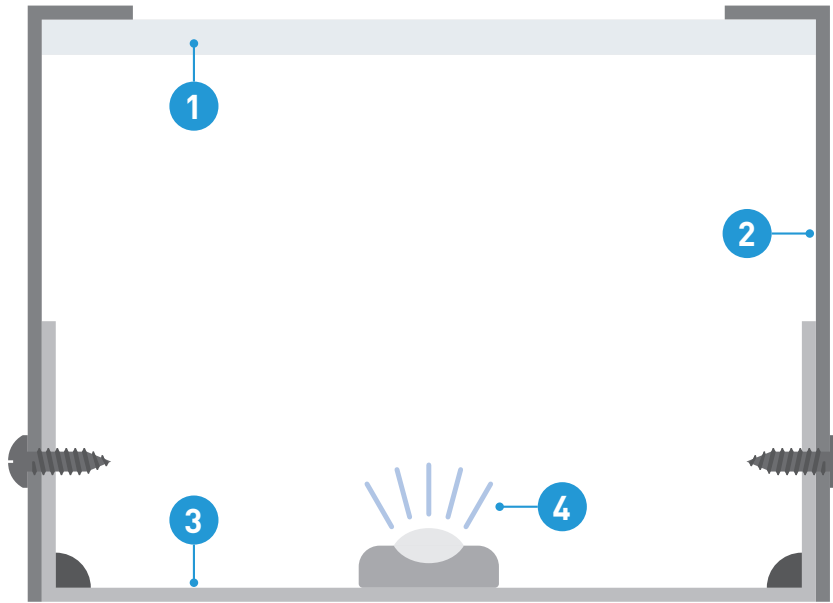

DETAILS

- 1 Perspex Opal acrylic letter face - 5mm thickness
- 2 Built up letter side returns (depth variable as per specification)
- 3 Built up fixing backtray
- 4 LED Lighting Module Colour temperature as noted on production schedule

Notes:

Colour References:

- RAL 9005 (Jet Black)
- 050 Opal Acrylic

PLANNING APPLICATION

Document No:

AVI-12809-ASC-000204

Page Size:

A3

Scale:

1:50

Start Date: 20/10/2025

Rev. Date: 13/11/2025

Drawn By: IC

Checked By: DMcC

Client:

Factory International

Project:

Aviva Studios

