
Olivio Piccolo

SX 962 14-9



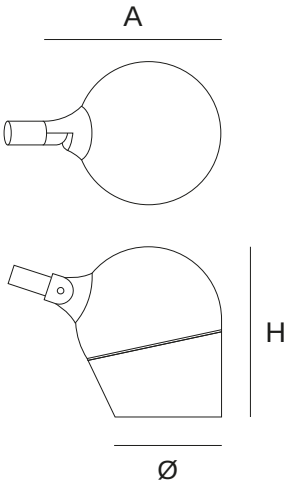

luminaire head
rotation symmetrical, extra narrow 5°
LED, 1200 lm, 3000 K, CRI > 80, electronic converter, Total power: 16 W

to be mounted on Olivio Candelabra, Sistema or Floracion poles and brackets, luminaire housing made of die-cast aluminium, painted, aluminium, screws made of stainless steel, adjustable head joint ensures precise direction of luminaire head, wide tilt range from 20° to 195°, can be rotated + / - 180°, shielding made of safety glass,
Optical system: spot reflector, reflector colour: silver
hidden cable entry through the head joint, incl. 8m feed cable, easy maintenance access via lockbar mechanism

Certifications

CE, IK08, IP67, Protection Class II,optional I

colour: Selux Graphite or special finish

Height H: 178 mm
Diameter Ø: 106 mm
Outreach : 166 mm
Weight: 2 kg
Windpressure: 0,024 m²

Make: Selux, Type: SX 962 14-9


IK08 IP67

Modifications are possible due to the constant development and improvement of LED technology.
© Selux AG, Subject to technical modification 10.2025
Selux GmbH, Volkmarstr. 18, 12099 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com

Olivio Piccolo

SX 962 14-9

Technics

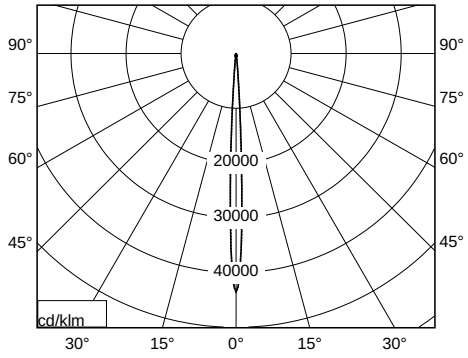

Photometric data: 11040

Lamp

LED 1200lm, 16W, 3000 K, CRI > 80

Optic

spot reflector ·

Electrics

electronic converter · Total power: 16W · 8m feed cable
control options:
DALI · fix value · CLT · HNS · AmpDim · individual power reduction in 300 lumen steps ex work ·

Luminous flux characteristics / Operating time of LED

Operating time LED	20000	40000	60000	80000	100000
Lumen maintenance	96%	91%	86%	82%	78%
LLMF*	0.96	0.91	0.86	0.82	0.78

* = Lamp lumen maintenance factor

Modifications are possible due to the constant development and improvement of LED technology.
© Selux AG, Subject to technical modification 10.2025
Selux GmbH, Volkmarstr. 18, 12099 Berlin, T +49 30 72001-0, F -100, info@selux.com, www.selux.com