



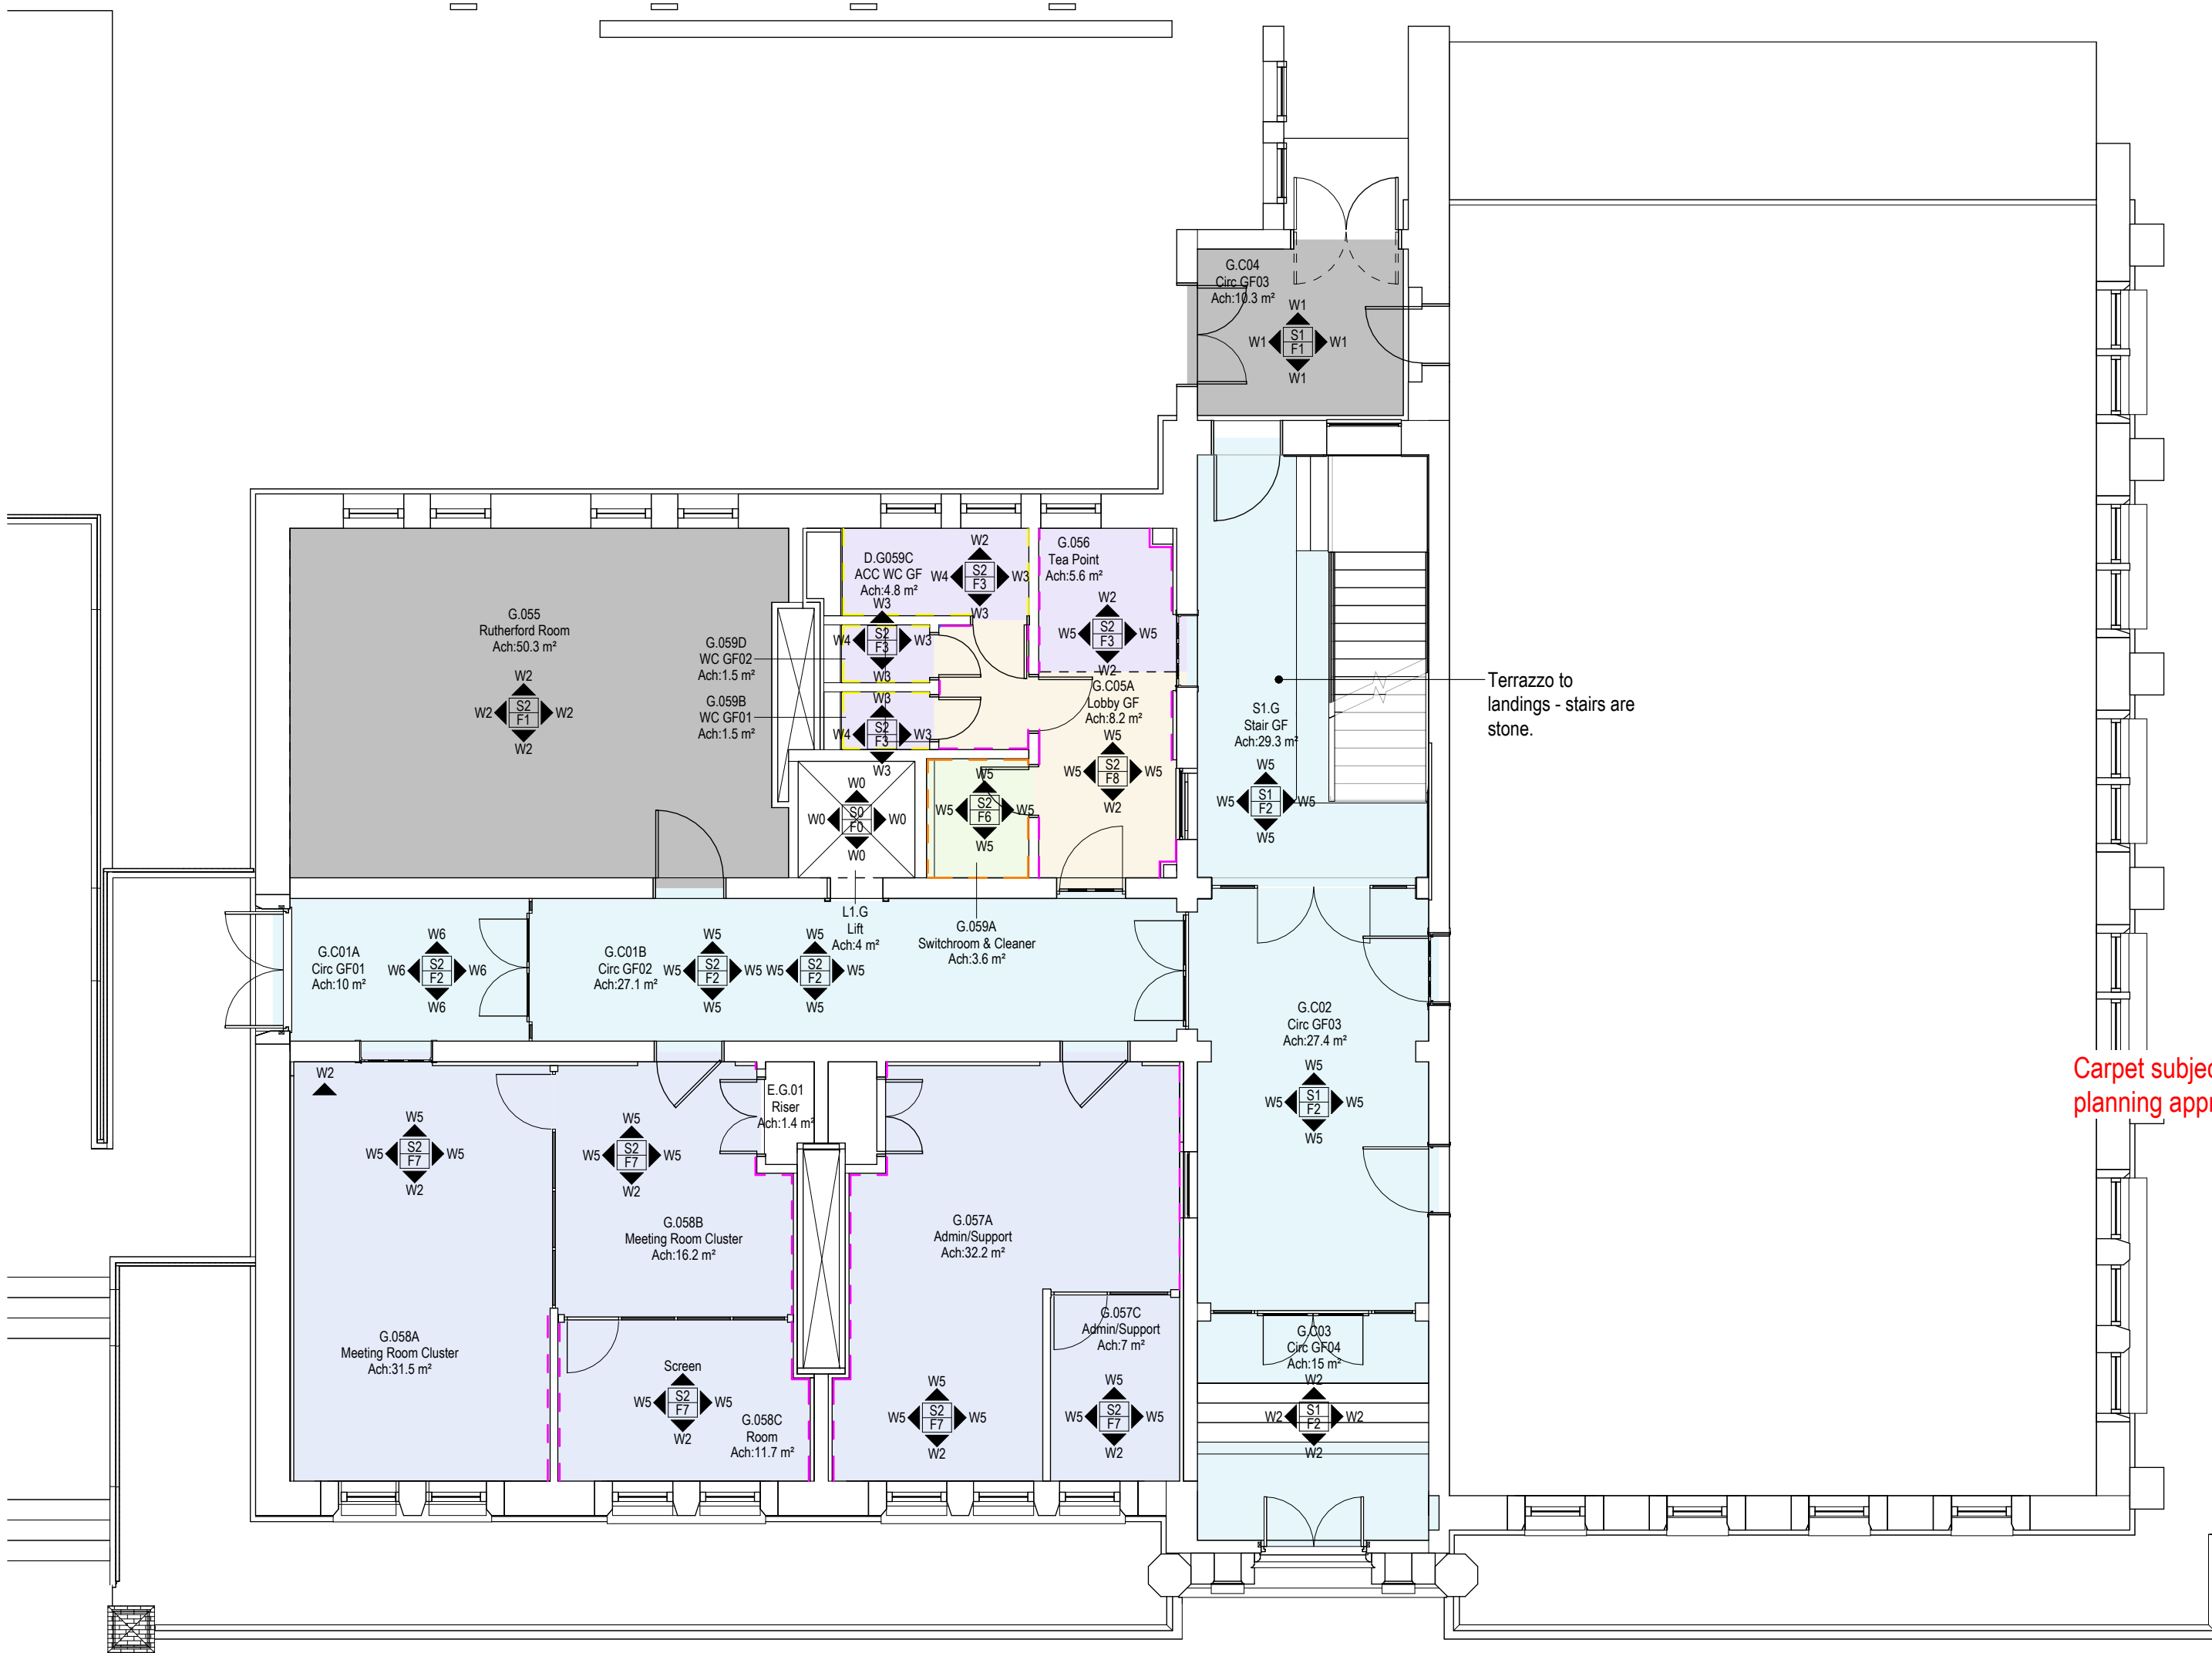

FINISHES KEY:

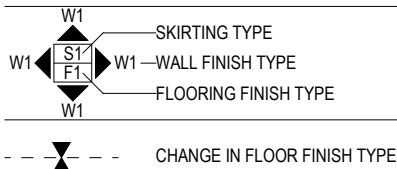

[F] FLOORS:

- F0: N/A
- F1: AS EXISTING
- F2: EXISTING TERRAZZO FLOOR SLIP RESISTANCE TO ACHIEVE PTV36+WET
- F3: LVT PTV36+ WET
- F4: FLOOR TILING - SLIP RESISTANCE PTV36+WET
- F5: FLOOR TILING KITCHEN- SLIP RESISTANCE PTV36+WET
- F6: FORBO SURESTEP SAFETY VINYL
- F7: FORBO TESSERA
- F8: TERRAZZO TILE_SLIP RESISTANCE PTV36+WET

[S] SKIRTING:

- S0: N/A
- S1: OUT OF SCOPE
- S2: AS EXISTING/ TILING

[W] WALLS:

- W0: REFURBISHMENT OF ALL FINISHES WITHIN LIFT
- W1: OUT OF SCOPE
- W2: AS EXISTING
- W3: TILING
- W4: IPS PANEL
- W5: PAINT (ONLY TO PLASTERED AREAS, SKIRTING BOARDS, CORNICES)
- W6: PAINT TO DECORATIVE PLASTERWORK

- Timber skirting to match existing profile + finish
- Timber skirting - Satinwood paint
- Tiled skirting
- Coved skirting - vinyl

Wall linings to be removed where safe to do so.
Where linings are removed masonry wall to be made good, timber skirtings shouldn't be required.

FLOOR FINISHES


- As existing
- Existing Terrazzo floor_Slip Resistance to achieve PTV36+Wet
- Forbo Surestep Safety Vinyl
- Forbo Tessera
- LVT - Slip Resistance PTV36+
- Terrazzo Tile_Slip Resistance PTV36+Wet

Ceilings:
Please allow for painting of all ceilings and decorative plasterwork

- Notes:
- This drawing is copyright.
 - Do not scale dimensions from this drawing.
 - This drawing is to be read in conjunction with all other relevant drawings.
 - All discrepancies on this drawing are to be reported to the architect.
 - Do not modify any element of this drawing.
 - Use drawing only for purpose(s) issued.
 - This drawing may contain colour.



North Point



Key Plan

The following external model files are included within this drawing:

Rev	Date	Revision Notes	Drawn	Review
C1	2024/11/27	Finishes drawings issued for Construction	AB	RM
P10	2024/10/25	Extent of Terrazzo in stair well clarified	EM	AB
P9	2024/05/15	Change Control 03,04,05	AB	RM
P8	2024/04/26	LBC comments.	AB	RM
P7	2024/02/21	Variation 1 - relocation of server room.	AB	RM
P6	2023/12/01	Listed Building Consent Submission.	AB	RM
P5	2023/11/23	Skirting types and scope added to plan	MC	RM
P4	2023/10/06	Stage 4 Issue for Costing	AB	RM
P3	2023/07/21	Preliminary Issue to Heritage Consultant	AB	RM
P2	2023/06/20	Floor finishes updated	AJ	RM
P1	2023/06/02	Stage 3 Preliminary Issue for costing	AB	RM

MANCHESTER
1824
The University of Manchester

ARCADIS

Project
Rutherford Building

Drawing Title
Finishes Plan - Level GF

Job Number 141532	Date FEB23	Security Classification	Drawn By MTW
Scale@A2 1 : 100	Purpose CONSTRUCTION		Reviewed By RM
Drawing Number 3300-RBUM-ARC-XX-GF-DR-A-3300			Revision C1