Ventilation | Product Information

LGH-RVS-E

Commercial Series

The **LGH-RVS-E** is designed to simultaneously extract stale air from a commercial building and supply fresh filtered air. Whilst doing this the Lossnay units also recover valuable heat energy for maximum efficiency.

Key Features & Benefits:

- Fresh air ventilation with energy efficient heat recovery
- Perfect for higher humidity environments
- Plug and play CO_2 sensor control including power
- Digital commissioning of fan speed increments
- Easy control interlock with Mr Slim and City Multi air conditioning systems
- M-NET connection for centralised control
- Integrated bypass damper for free cooling
- In-built condensate drainage traps

LGH-RVS-E
Commercial Series

MODEL			LGH-50RVS-E	LGH-80RVS-E	LGH-100RVS-E
25%	Air Volume	l/s	35	56	69
		m^3/hr	125	200	250
	External Static Pressure	Pa	9	11	12
	Temperature Exchange Efficiency	%	93	90	90
	Specific Fan Power	W/(l/s))	0.72	0.58	0.5
	Input Power	W	25	32	35
	Sound Pressure Level	dB(A)	18	18	18
50%	Air Volume	l/s	69	111	139
		m^3/hr	250	400	500
	External Static Pressure	Pa	38	43	48
	Temperature Exchange Efficiency	%	91	86	86
	Specific Fan Power	W/(l/s))	0.86	0.77	0.72
	Input Power	W	60	85	100
	Sound Pressure Level	dB(A)	22	25	24
75%	Air Volume	l/s	104	167	208
		m^3/hr	375	600	750
	External Static Pressure	Pa	84	96	107
	Temperature Exchange Efficiency	%	89	84	84
	Specific Fan Power	W/(l/s))	1.06	1.05	1.08
	Input Power	W	110	175	225
	Sound Pressure Level	dB(A)	27	30	32
100%	Air Volume	l/s	139	222	278
		m^3/hr	500	800	1000
	External Static Pressure	Pa	150	170	190
	Temperature Exchange Efficiency	%	87	82	82
	Specific Fan Power	W/(l/s))	1.37	1.46	1.6
	Input Power	W	190	325	445
	Sound Pressure Level	dB(A)	33	36	37
DUCT SIZE		mm	200	250	250
WEIGHT	(with full condensate drain)	kg	55 (67)	63 (77)	73 (89)
DIMENSIONS	Width x Depth x Height	mm	974 x 946 x 465	1185 x 997 x 465	1185 x 1224 x 465
ELECTRICAL POWER SUUPPLY			220-240V, 50Hz	220-240V, 50Hz	220-240V, 50Hz
MAXIMUM RUNNING CURRENT		A	2.2	3.7	4.2
FUSE RATING (BS88) - HRC (A)		A	6	6	6
HEAT EXCHANGER				Plastic Counter Flow	
CONDENSATE CONNECTION		mm	32	32	32
STANDARD FILTER		ISO 16890:2016 / EN779:2012		Coarse 35% / G3	
OPTIONAL FILTER(S)		ISO 16890:2016 / EN779:2012		ePM1 65%, ePM2.5 75%, ePM10 90% / F8 ePM10 80% / M6	

Notes: Airflow rate, static pressure, power input, running current, and heat exchange efficiency tested to ISO 16494 (winter condition), 230v 50Hz. A-Weighted Sound Pressure Level measured at 1.5m under the centre of the unit in an anechoic chamber.

LGH-50/80/100RVS-E DIMENSIONS

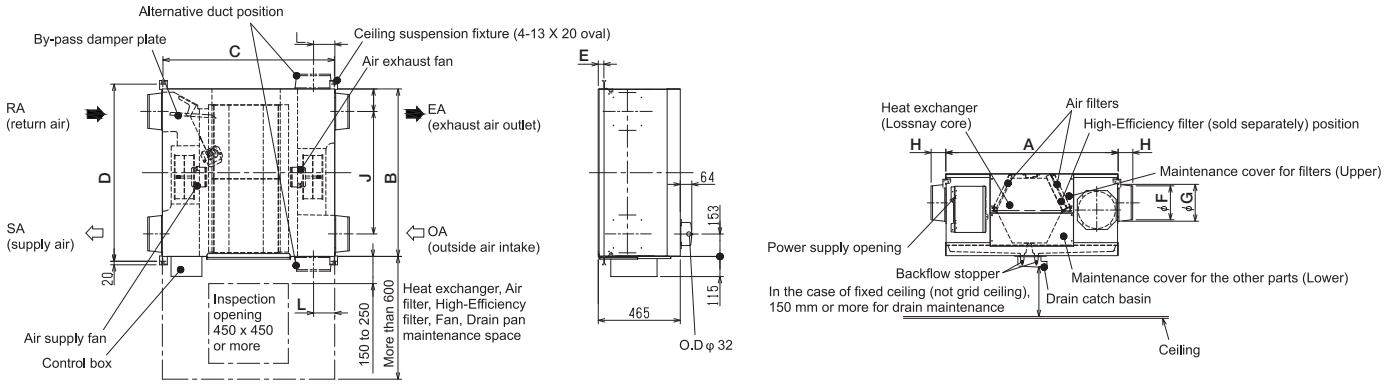

	A	B	C	D	E	F	G	H	J	L
LGH-50RVS-E	974	946	969	1001	32	192	208	83	692	120
LGH-80RVS-E	1185	997	1179	1051	55	242	258	82	683	161
LGH-100RVS-E	1185	1224	1179	1279	55	242	258	82	910	161

MITSUBISHI ELECTRIC
Changes for the Better

Telephone: **01707 282880**
email: **ventilation@meuk.mee.com**
les.mitsubishielectric.co.uk

@meuk_les
@green_gateway
Mitsubishi Electric Living Environmental Systems UK
Mitsubishi Electric Cooling and Heating UK
mitsubishielectricuk_les
Mitsubishi Electric Living Environmental Systems UK
BLOG thehub.mitsubishielectric.co.uk

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division, Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England. Telephone: 01707 282880 Fax: 01707 278881
IRELAND Mitsubishi Electric Europe, Westgate Business Park, Ballymount, Dublin 24, Ireland. Telephone: (01) 419 8800 Fax: (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2021. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774), R134a (GWP:1430), R513A (GWP:631), R454B (GWP:466), R1234ze (GWP:7) or R1234yf (GWP:4). *These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows. R410A (GWP:1975), R32 (GWP:550), R407C (GWP:1650) or R134a (GWP:1300).

Effective as of May 2021

Green Gateway greengateway.mitsubishielectric.co.uk