


General notes

1. This information is confidential and the copyright of Anomaly.
2. Anomaly accepts no liability for use of this drawing by parties other than the party to whom it was prepared or for purposes other than that which is stated on the issue sheet. It shall not be disclosed or passed to any other party in any form in whole or part without Anomaly's express permission in writing nor should any other party place reliance upon it.
3. Where data is supplied electronically, it is for convenience only. The original information is the printed or controlled copy which will be supplied on request.
4. All dimensions are in millimetres. No dimensions or other information shall be inferred from the electronic data unless specifically stated on the printed or controlled copy. Where dimensions are not given, drawings must not be scaled and the matter should be referred back to Anomaly.
5. This drawing should be read in conjunction with all other project information, produced by Anomaly and others. In the event of any conflict between the information contained on this drawing and in any other project document, drawings, specifications, schedules etc. the matter must be referred back to Anomaly for clarification.
6. All dimensions and conditions are to be checked on site by the contractor prior to preparing designs, drawings, calculations etc. or commencing any work. The contractor is responsible for checking that there is no conflict between site dimensions and drawn dimensions

Key plan

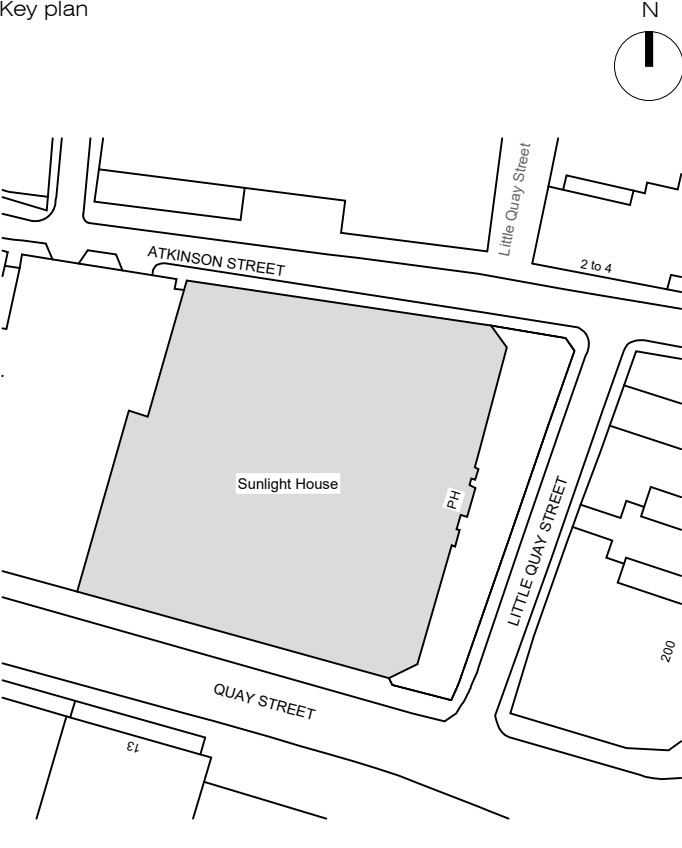

Drawing key

Notes:

Drawing illustrates the design intent for the typical Large Meeting Room. Contractor to modify configuration to fit applicable spaces according to GA, Floor finishes and RCP plans

- Make good all walls, service doors and core within scope.
- Refer to all joinery/detail drawings and finishes schedule for finishes locations and types
- Ensure a TRM-721 is installed between change in floor finish. At door thresholds, ensure threshold trim is on centre line of door when fully closed. Install as per manufacturers guidelines.
- Contractor to verify all existing screed/floor conditions and levels. Should any changes be required in level, these must be coordinated with PM and Architect(s) for approval prior to any changes.
- See Components/Finishes Schedule for product specifications, suppliers and contact details.
- Refer to skirting package [48]
- Ensure all drywalls are fully prepared as necessary to receive decoration.
- All plasterboard walls to be painted in PNT-111 unless otherwise stated.
- Refer to Ceiling Finishes scoping package [38]
- Contractor/subcontractor to provide samples for approval
- Flooring strategy varies in each tenancy. Scope TBC, refer to Floor finishes series [37] and client team for scope

S2	001	11/11/2024	Construction issue
Status	Revision	Date	Description

JW	LS/AM	LS/AM
Drawn by	Checked by	Approved by

Architect
ANOMALY
Morelands, 5-23 Old Street
London EC1 V9HL
+44 (0) 20 7054 1145
hello@anomaly.london
www.anomaly.london

Client
Karrev (Sunlight) Ltd.


Project
SUNLIGHT HOUSE
Little Quay St,
Manchester M3 3HP

Drawing title
**FLOORS WITH PARQUET AND
CONTAINMENT PROPOSAL**


Job number	Sheet size	Scale @ A1	Scale @ A3
126	A1	1:25	1:50

Project stage
CONSTRUCTION

Drawing number
SLH-ANO-P0-XX-DR-A-34710

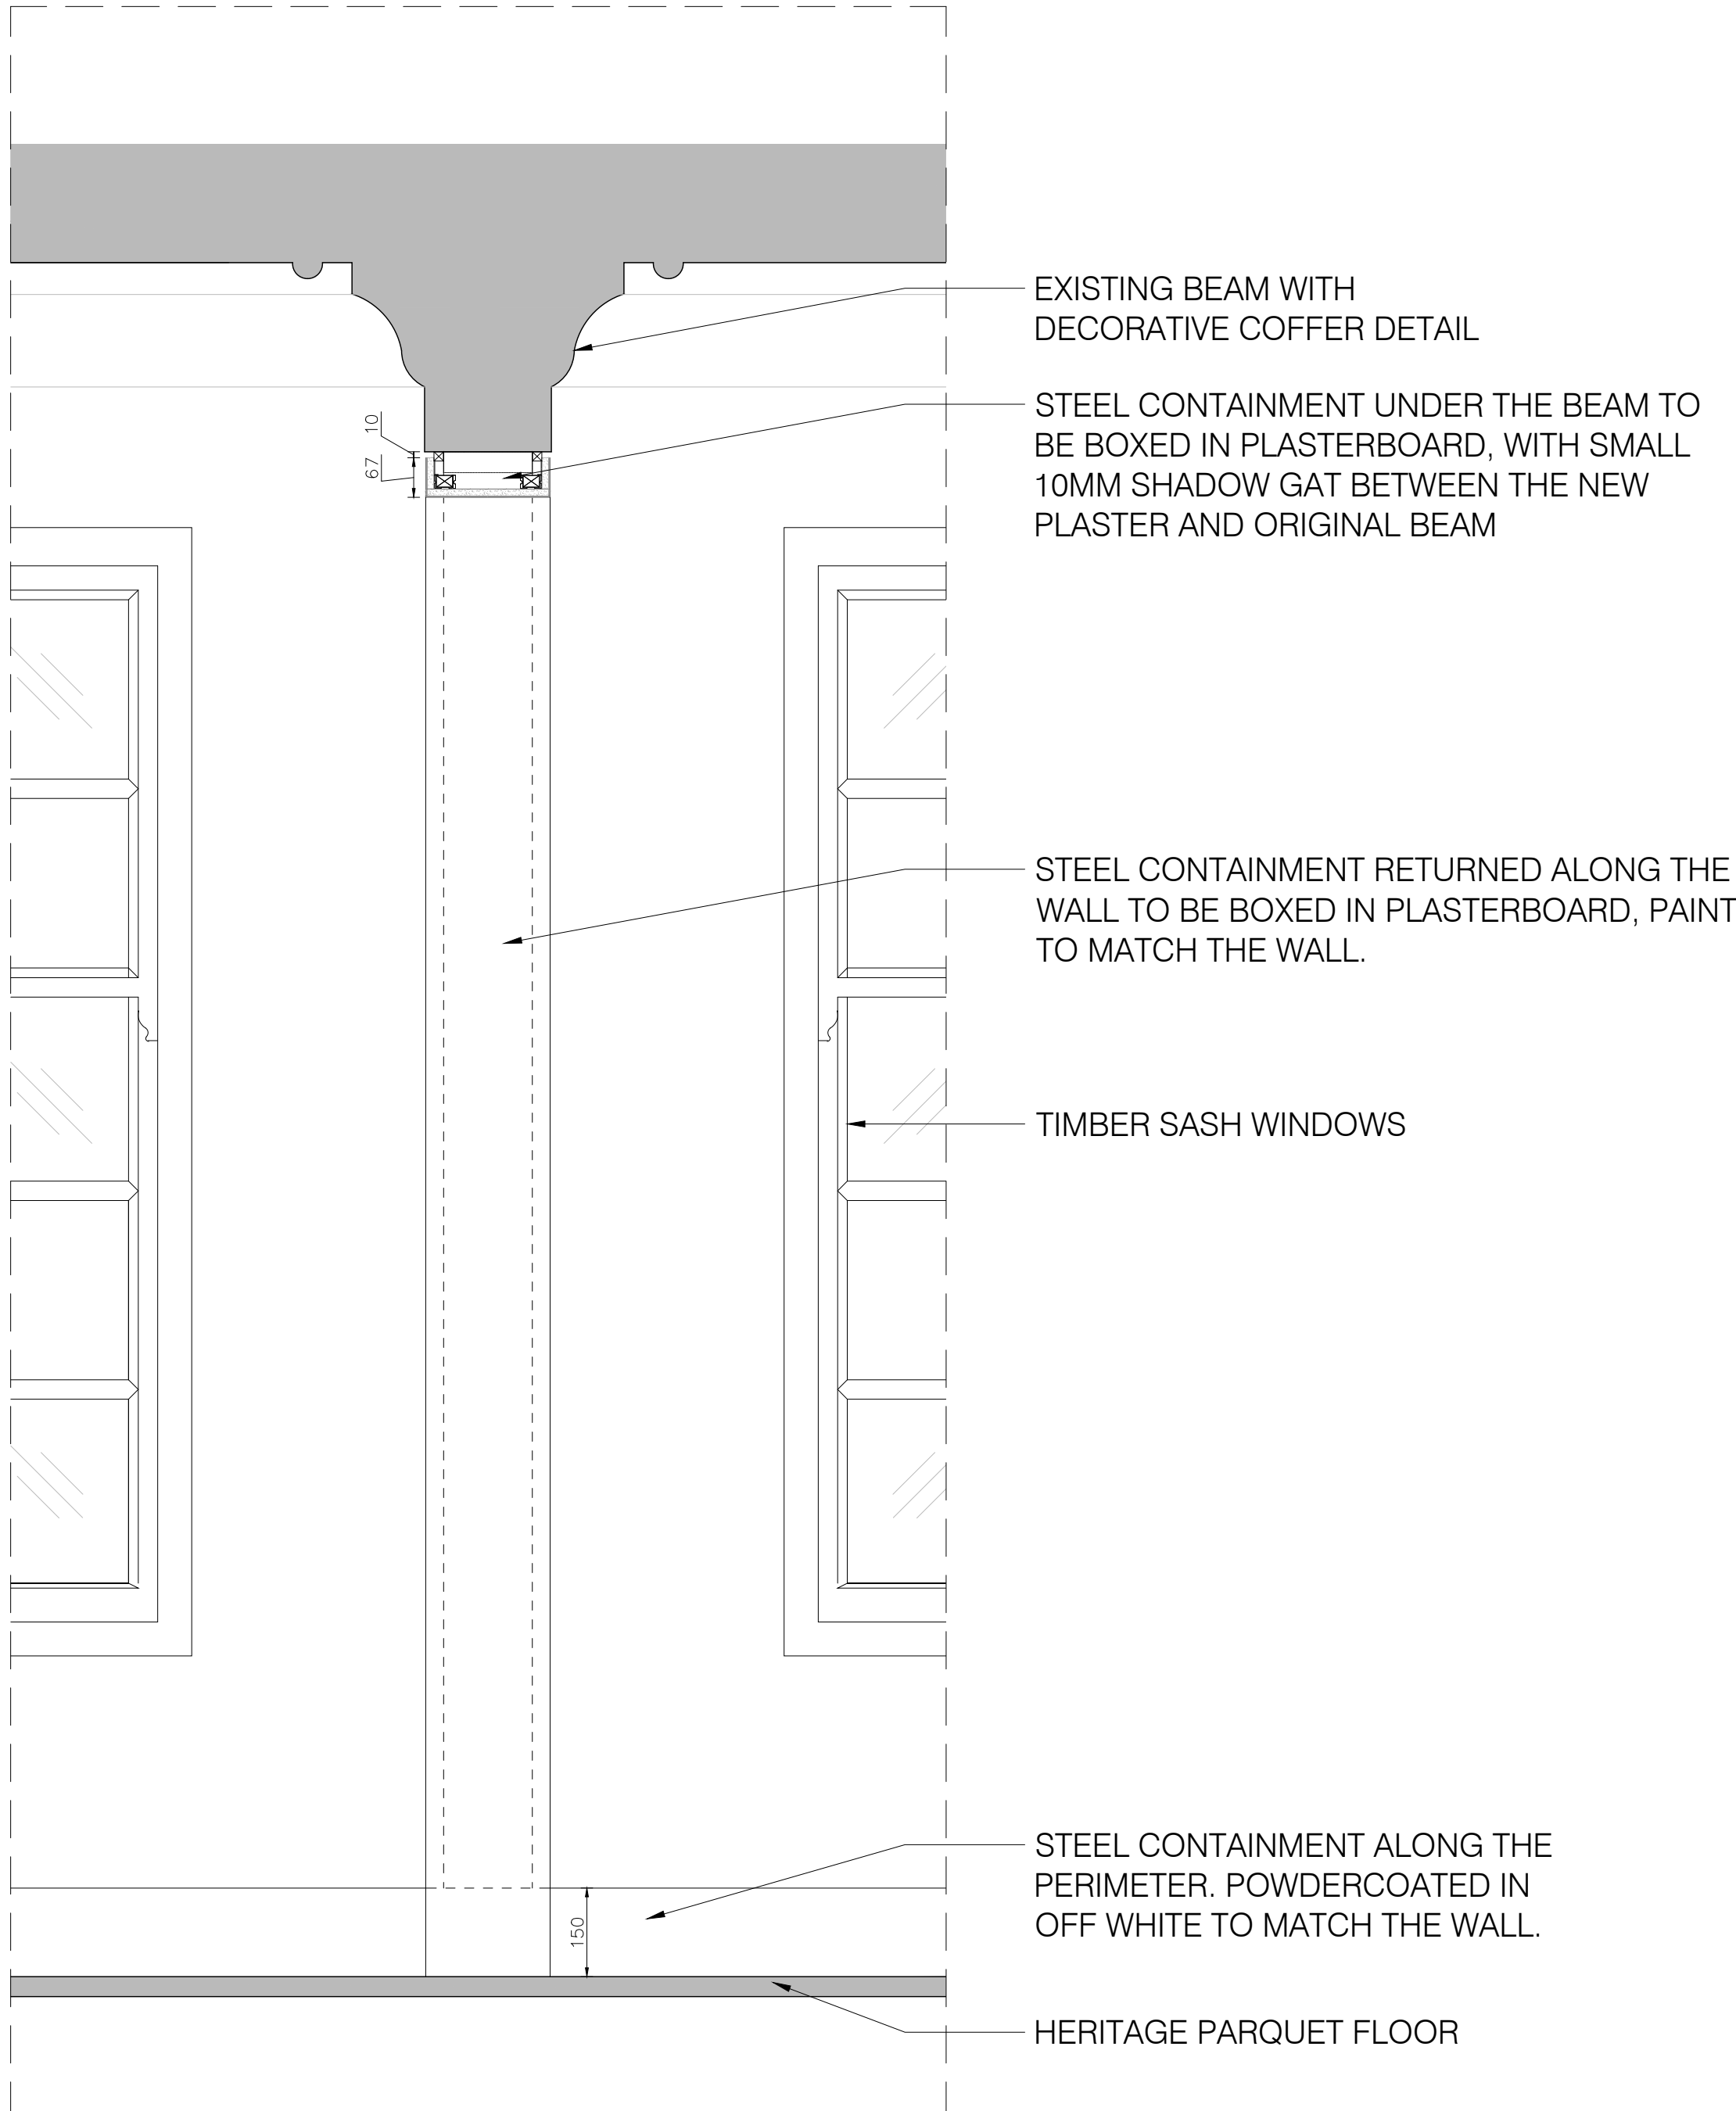

01 PROPOSED TYPICAL CONTAINMENT
LEVEL 8

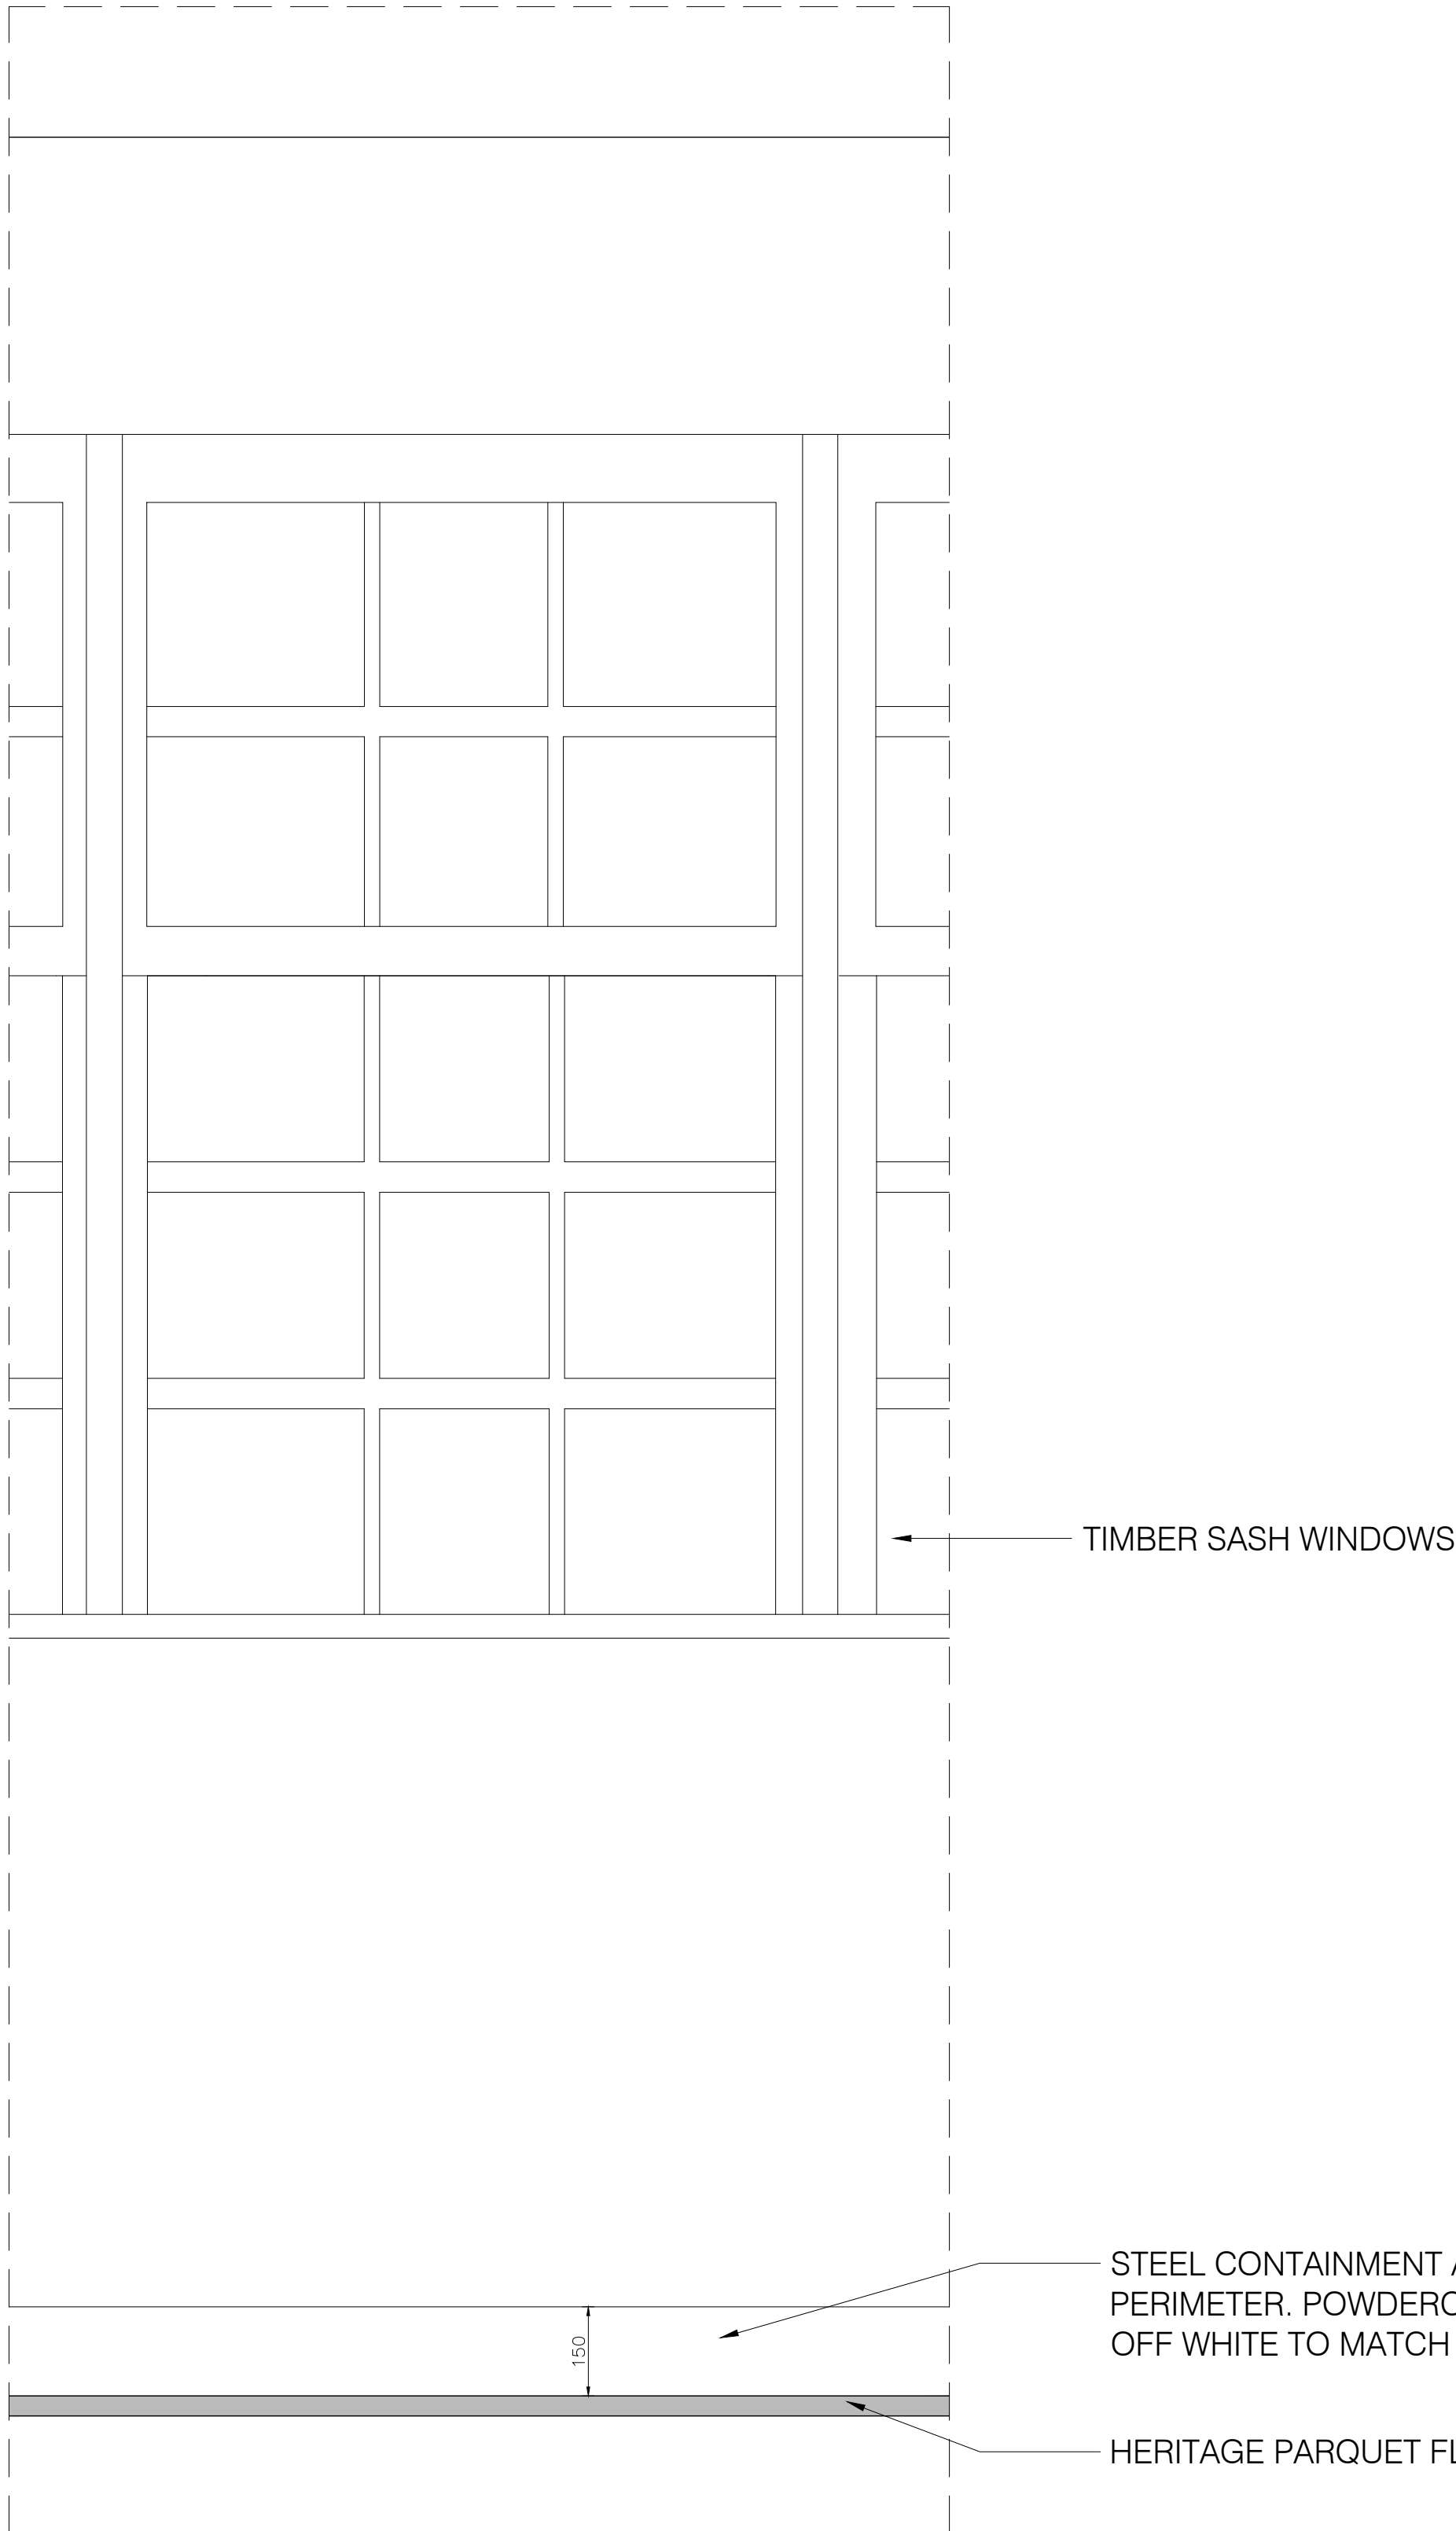

02 PROPOSED TYPICAL CONTAINMENT
LEVEL 13

Scale 1:25

