Technical Specification

Control Point	Head (m)	Flow (l/s)
Primary Design	1.400	5.000
Flush-Flo™	0.416	4.991
Kick-Flo®	0.855	3.980
Mean Flow		4.382

This Hydro-Brake® Optimum includes:


- •All in 3 mm Grade 304L stainless steel
- • Integral pivoting by-pass door allowing clear line of sight through to outlet, c/w operating rope
- • Media blasted for corrosion resistance
- • Variable flow rate post installation via adjustable inlet (if necessary)
- • Indicative Weight: 20 kg
- • Product Carbon Footprint: 80.61 kgCO2e

Based on a 3rd party verified EPD: hydro-int.com/epd

BBA APPROVAL INSPECTION TESTING CERTIFICATION CERTIFICATE 08/4596

wrc approved PT/503/0422 Valid: 01/04/2022 - 31/03/2027

hydro-int.com/patents

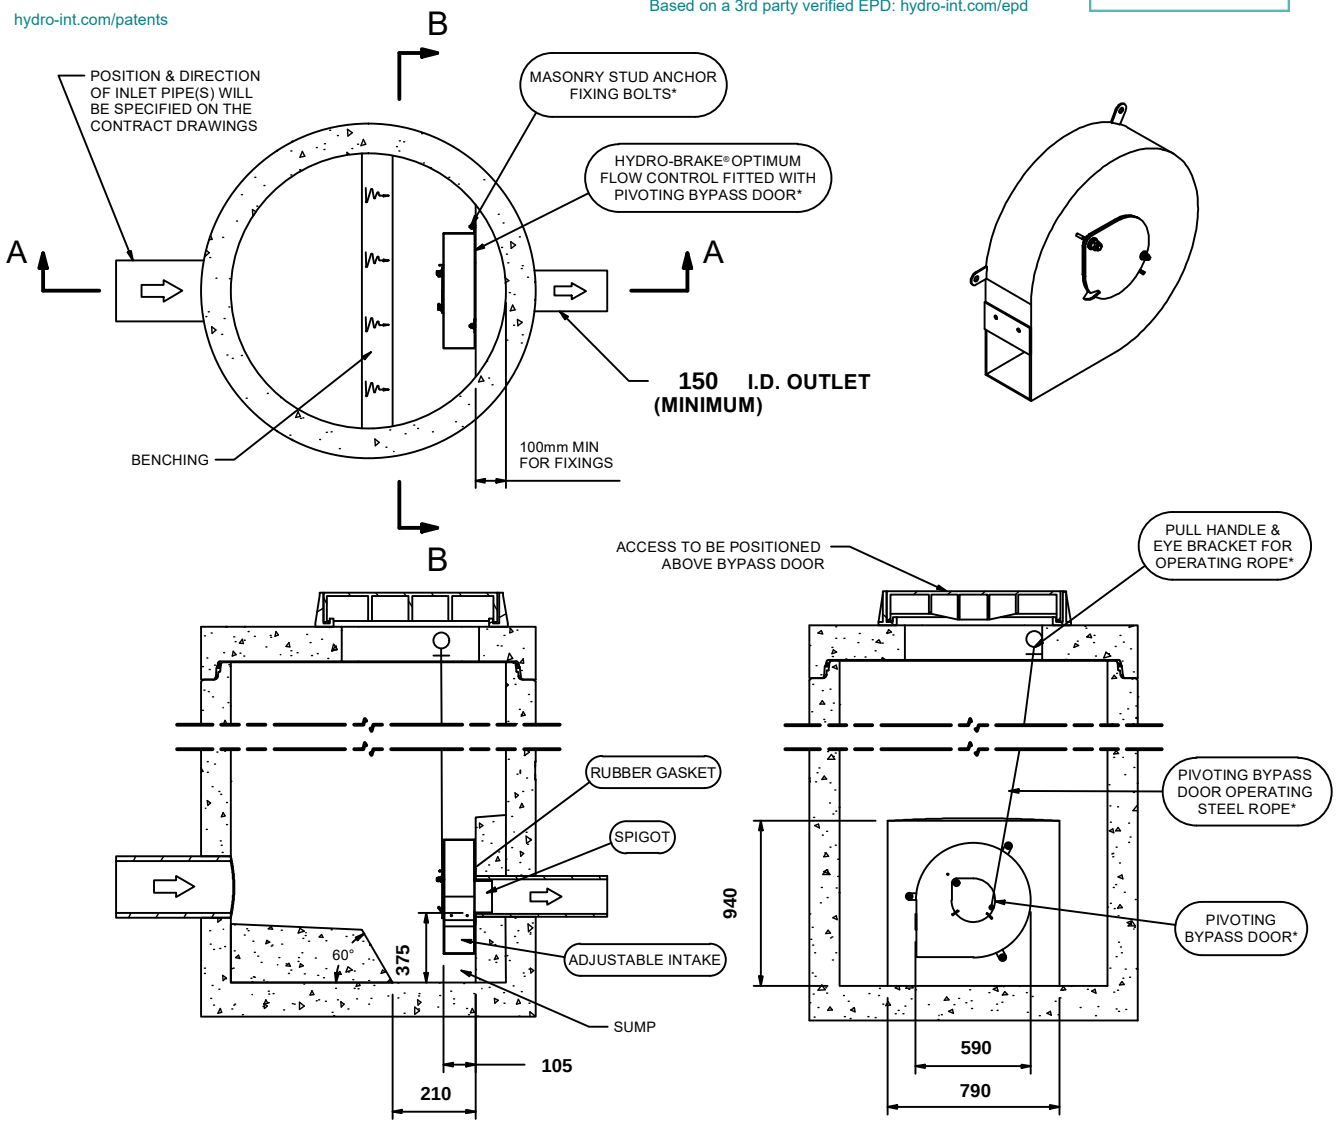

SECTION A-A

SECTION B-B

IMPORTANT: ⬭ LIMIT OF HYDRO INTERNATIONAL SUPPLY
THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS
* WHERE SUPPLIED
HYDRO-BRAKE® IS A REGISTERED TRADEMARK FOR FLOW CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE

The head/flow characteristics of this SHE-0100-5000-1400-5000 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic curve.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro International A CRH COMPANY

DATE	14/04/2026 08:23
SITE	Burnage Cricket Club
DESIGNER	Charlotte Richards
REF	J8929

SHE-0100-5000-1400-5000
Hydro-Brake® Optimum

© 2026 Hydro International Ltd • Unit 2, Rivermead Court • Kenn Business Park • Windmill Road • Kenn • Clevedon • BS21 6FT • Tel: 01275 878371 • Website: hydro-int.com • Email: enquiries@hydro-int.com

crichards@bellmunro.co.uk