




16no. Platipus Earth Anchors will be installed to a depth of 5 metres at 20° below horizontal and spaced at 1.2 metre centres. There is no need to remove sections of wall and only to remove a cluster of facing bricks to allow for a 250mm x 250mm pattress plate to the inner 2nd skin of brickwork. The anchors will be in two rows and will be up from the footpath $\frac{1}{3}$ of the retained height and the 2nd row to be $\frac{2}{3}$ up from the footpath for the retained height.

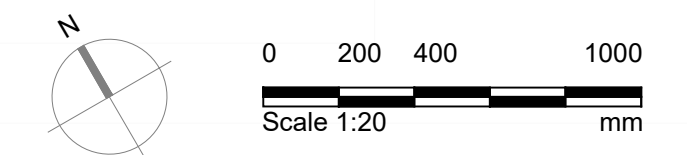

Notes

1. Any dwg format drawing is to be read in conjunction with and at the scale of the accompanying pdf.
2. Where colours other than black or grey are used, the drawing must be plotted in colour.
3. For status 'C' (Construction) drawings all dimensions are to be checked on site by the contractor, scaling is for Local Authority purposes only.
4. Unless otherwise indicated, all dimensions are in millimeters.
5. All information on this drawing is to be read in conjunction with the relevant Donald Insall Associates specification and trade contractors' drawings and information by specialists.
6. In the event of any discrepancy, please contact us immediately.
7. This drawing may contain survey information by others and is to be used solely for the purposes for which it was issued.
8. These are uncontrolled documents issued for information purposes only. If you have any queries regarding the drawings, please contact DIA immediately.
9. Please note DIA cannot be held responsible for any errors arising from changes made to an uncontrolled file.

© 2025 DONALD INSALL ASSOCIATES LTD

Drawing Status
F Feasibility
S Sketch Design
P Planning
B Building Control
D Developed Design
M Measurement
T Tender
C Construction
R Record

Rev	Date	Dwn	Auth	Revision

1	13-04-26	EXW	KXM	Issued for LBC	
0	25-02-26	EXW	KXM	Initial Issue	
Rev	Date	Dwn	Auth	Revision	

Project	MQMH.06		No	2200	
Scale (A1)	1:20		Status	3P	Revision
					1