


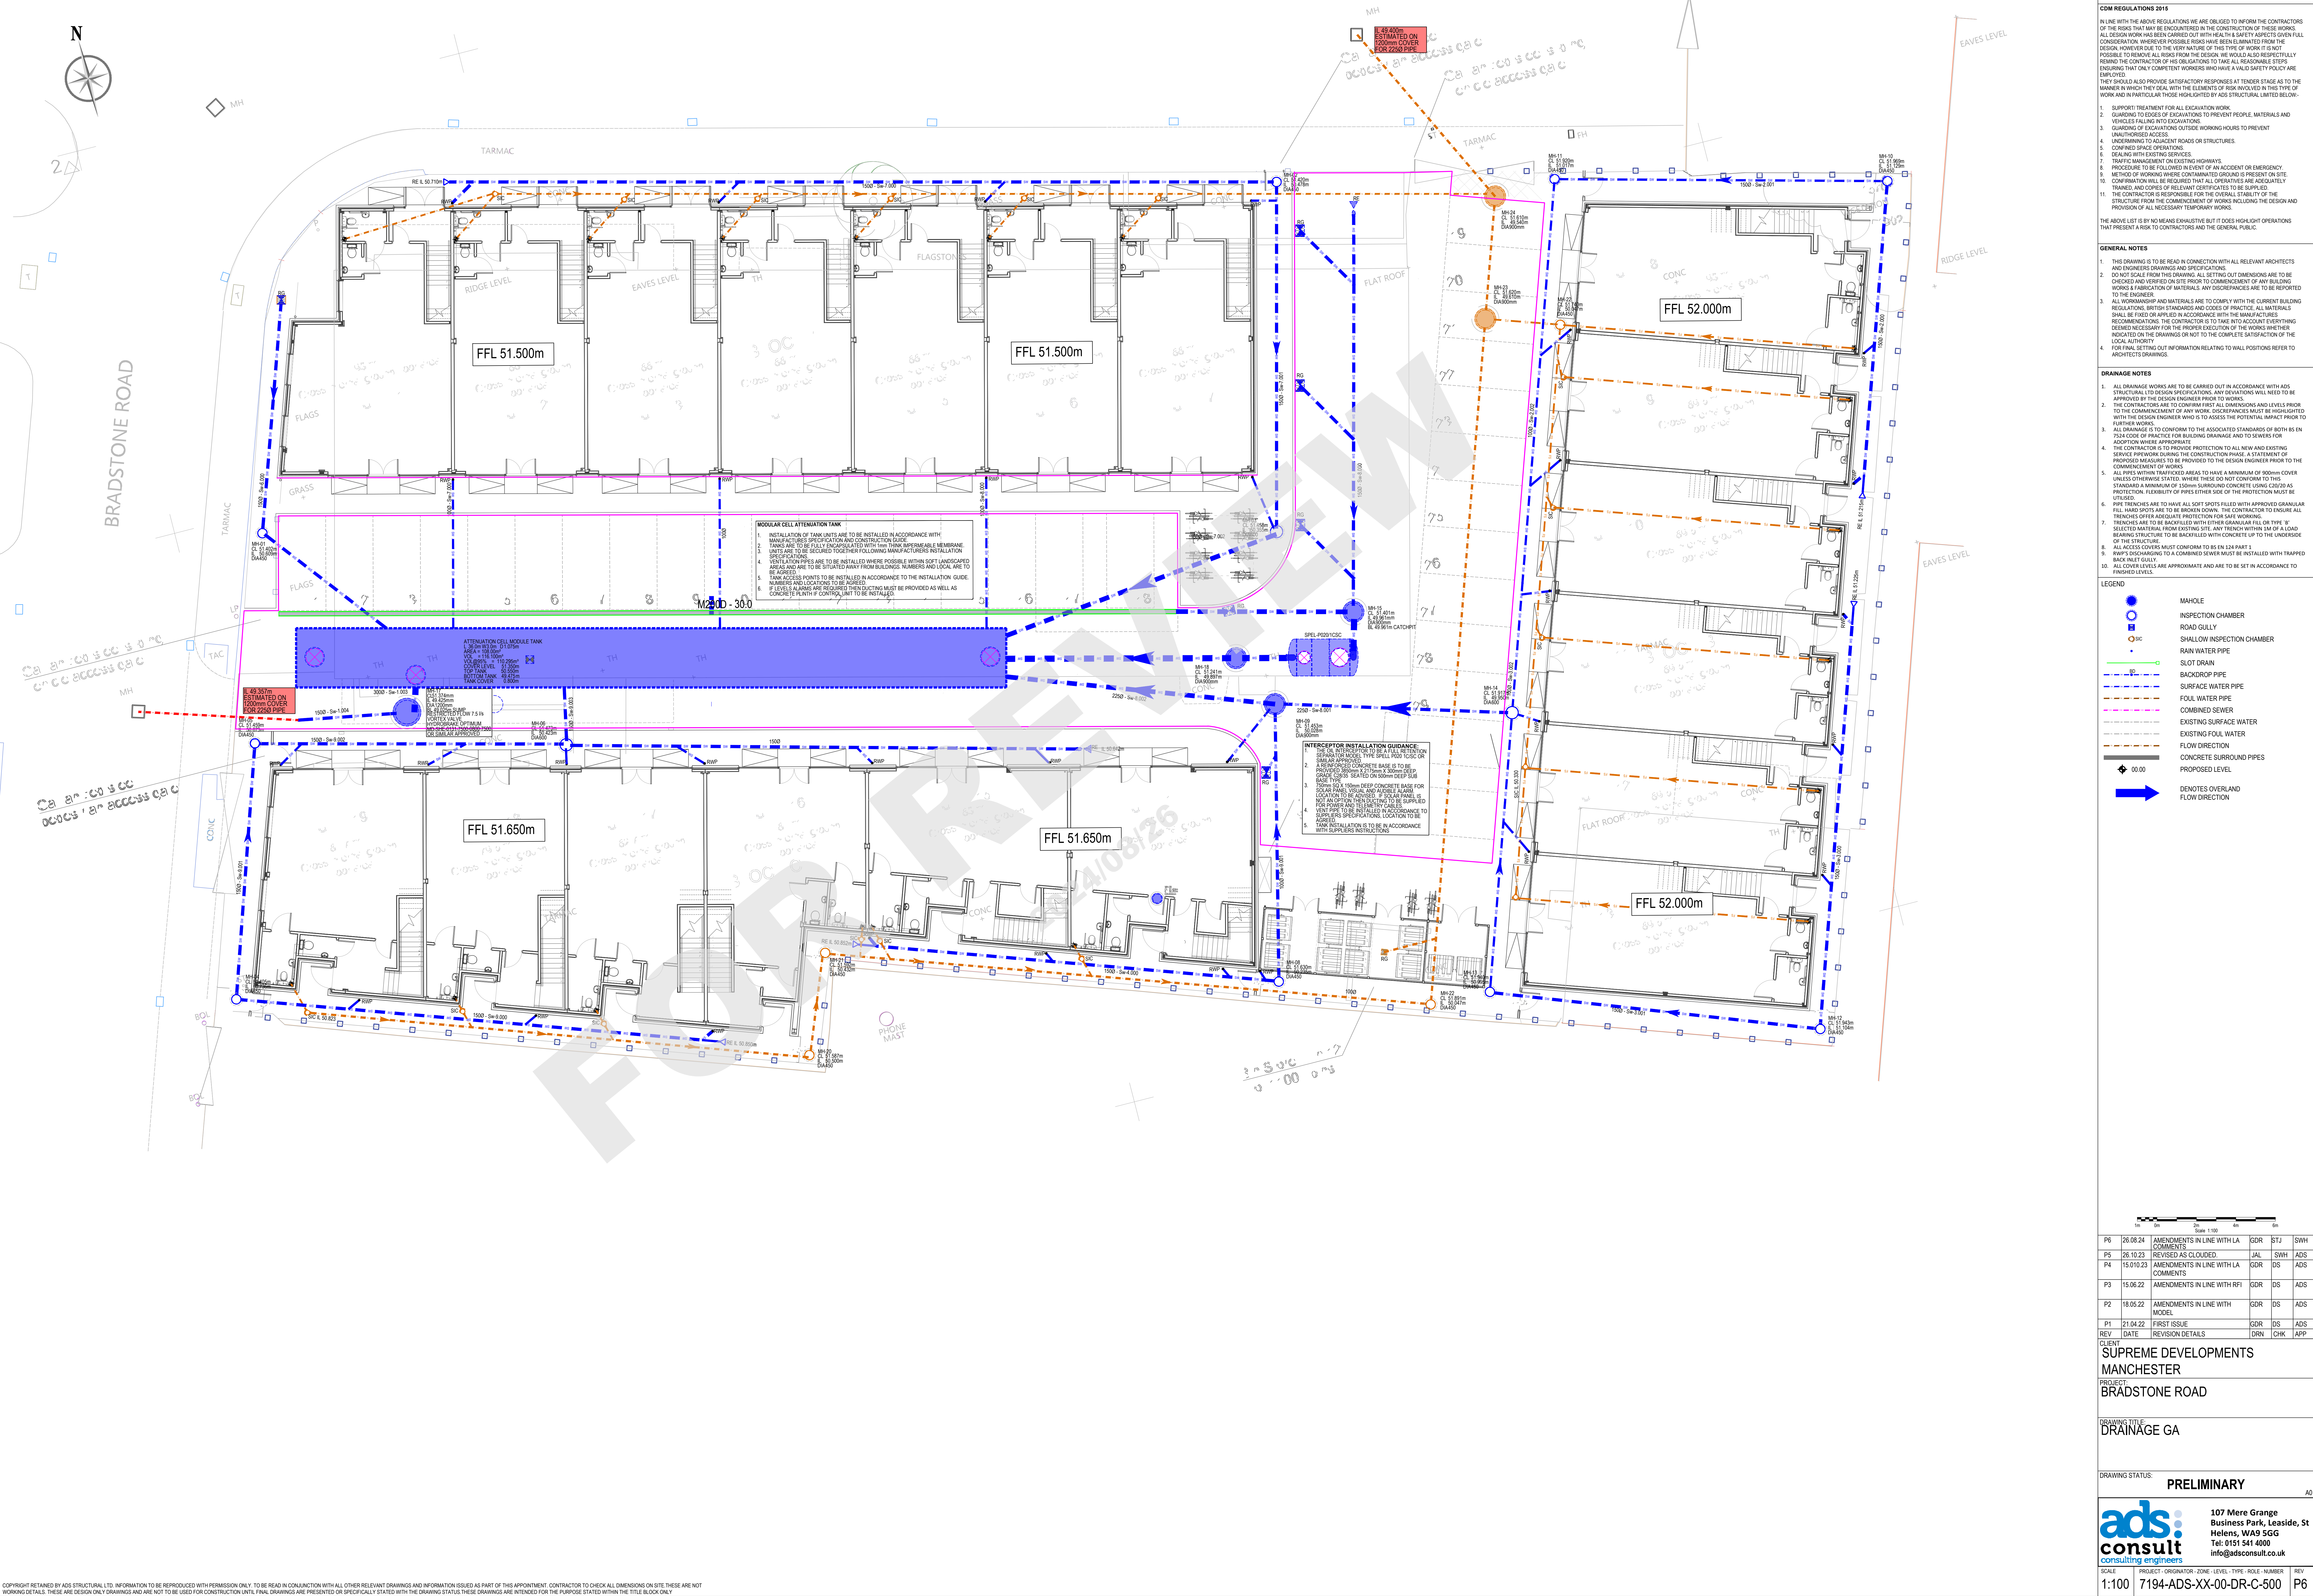

CDM REGULATIONS 2015

IN LINE WITH THE ABOVE REGULATIONS WE ARE OBLIGED TO INFORM THE CONTRACTORS OF THE RISKS THAT MAY BE ENCOUNTERED IN THE CONSTRUCTION OF THESE WORKS. ALL DESIGN WORK HAS BEEN CARRIED OUT WITH HEALTH & SAFETY ASPECTS GIVEN FULL CONSIDERATION. WHEREVER POSSIBLE RISKS HAVE BEEN ELIMINATED FROM THE DESIGN. HOWEVER DUE TO THE NATURE OF THIS TYPE OF WORK IT IS NOT POSSIBLE TO REMOVE ALL RISKS FROM THE DESIGN. WE WOULD ALSO RESPECTFULLY REMIND THE CONTRACTOR OF HIS OBLIGATION TO TAKE ALL REASONABLE STEPS ENSURING THAT ONLY COMPETENT WORKERS WHO HAVE A VALID SAFETY POLICY ARE EMPLOYED. THEY SHOULD ALSO PROVIDE SATISFACTORY RESPONSES AT TENDER STAGE AS TO THE MANNER IN WHICH THEY DEAL WITH THE ELEMENTS OF RISK INVOLVED IN THIS TYPE OF WORK AND IN PARTICULAR THOSE HIGHLIGHTED BY ADS STRUCTURAL LIMITED BELOW.

- SUPPORT TREATMENT FOR ALL EXCAVATION WORK.
- GUARDING TO EDGES OF EXCAVATIONS TO PREVENT PEOPLE, MATERIALS AND VEHICLES FALLING INTO EXCAVATIONS.
- GUARDING OF EXCAVATIONS OUTSIDE WORKING HOURS TO PREVENT UNAUTHORISED ACCESS.
- UNDERMINING TO ADJACENT ROADS OR STRUCTURES.
- CONFINED SPACE OPERATIONS.
- DEALING WITH EXISTING SERVICES.
- TRAFFIC MANAGEMENT ON EXISTING HIGHWAYS.
- PROCEDURE TO BE FOLLOWED IN EVENT OF AN ACCIDENT OR EMERGENCY.
- METHOD OF WORKING WHERE CONTAMINATED GROUND IS PRESENT ON SITE.
- CONFIRMATION WILL BE REQUIRED THAT ALL OPERATIVES ARE ADEQUATELY TRAINED AND COMPE OF RELIEF CERTIFICATES TO BE SUPPLIED.
- THE CONTRACTOR IS RESPONSIBLE FOR THE OVERALL STABILITY OF THE STRUCTURE FROM THE COMMENCEMENT OF WORKS INCLUDING THE DESIGN AND PROVISION OF ALL NECESSARY TEMPORARY WORKS.

THE ABOVE LIST IS BY NO MEANS EXHAUSTIVE BUT IT DOES HIGHLIGHT OPERATIONS THAT PRESENT A RISK TO CONTRACTORS AND THE GENERAL PUBLIC.

GENERAL NOTES

- THIS DRAWING IS TO BE READ IN CONNECTION WITH ALL RELEVANT ARCHITECTS AND ENGINEERS DRAWINGS AND SPECIFICATIONS.
- DO NOT SCALE FROM THIS DRAWING. ALL SETTING OUT DIMENSIONS ARE TO BE CHECKED AND VERIFIED ON SITE PRIOR TO COMMENCEMENT OF ANY BUILDING WORKS & A PARTITION OF MATERIALS. ANY DISCREPANCIES MUST BE REPORTED TO THE ENGINEER.
- ALL WORKMANSHIP AND MATERIALS ARE TO COMPLY WITH THE CURRENT BUILDING REGULATIONS, BRITISH STANDARDS AND CODES OF PRACTICE. ALL MATERIALS SHALL BE FIELD OR APPLIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. THE CONTRACTOR IS TO TAKE INTO ACCOUNT EVERYTHING DEEMED NECESSARY FOR THE PROPER EXECUTION OF THE WORKS WHETHER INDICATED ON THE DRAWINGS OR NOT TO THE COMPLETE SATISFACTION OF THE LOCAL AUTHORITY.
- FOR FINAL SETTING OUT INFORMATION RELATING TO WALL POSITIONS REFER TO ARCHITECTS DRAWINGS.

DRAINAGE NOTES

- ALL DRAINAGE WORKS ARE TO BE CARRIED OUT IN ACCORDANCE WITH ADS STRUCTURAL LTD DESIGN SPECIFICATIONS. ANY DEVIATIONS WILL NEED TO BE APPROVED BY THE DESIGN ENGINEER PRIOR TO WORKS.
- THE CONTRACTOR ARE TO CONFIRM FIRST ALL DIMENSIONS AND LEVELS PRIOR TO THE COMMENCEMENT OF ANY WORK. DISCREPANCIES MUST BE HIGHLIGHTED WITH THE DESIGN ENGINEER WHO IS TO ASSESS THE POTENTIAL IMPACT PRIOR TO FURTHER WORKS.
- ALL DRAINAGE IS TO CONFORM TO THE ASSOCIATED STANDARDS OF BOTH BS EN 1254 CODE OF PRACTICE FOR BUILDING DRAINAGE AND TO SEWERS FOR ADOPTION WHERE APPROPRIATE.
- THE CONTRACTOR IS TO PROVIDE PROTECTION TO ALL NEW AND EXISTING SERVICE PIPEWORK DURING THE CONSTRUCTION PHASE. A STATEMENT OF PROPOSED MEASURES TO BE PROVIDED TO THE DESIGN ENGINEER PRIOR TO THE COMMENCEMENT OF WORKS.
- ALL PIPES WITHIN TRAFFICED AREAS TO HAVE A MINIMUM OF 900mm COVER UNLESS OTHERWISE STATED. WHERE THESE DO NOT CONFORM TO THIS STANDARD A MINIMUM OF 150mm SUBGRADE CONCRETE USING C30/37 AS PROTECTION. FLEXIBILITY OF PIPES EITHER SIDE OF THE PROTECTION MUST BE UTILISED.
- PIPE TRENCHES ARE TO HAVE ALL SOFT SPOTS FILLED WITH APPROVED GRANULAR FILL. HARD SPOTS ARE TO BE BROKEN DOWN. THE CONTRACTOR TO ENSURE ALL TRENCHES OFFER ADEQUATE PROTECTION FOR SAFE WORKING.
- TRENCHES ARE TO BE BACKFILLED WITH EITHER GRANULAR FILL OR TYPE 'B' SELECTED MATERIAL FROM EXISTING SITE. ANY TRENCH WITHIN 1M OF A LOAD BEARING STRUCTURE TO BE BACKFILLED WITH CONCRETE UP TO THE UNDERSIDE OF THE STRUCTURE.
- ALL ACCESS COVERS MUST CONFORM TO BS EN 124 PART 1.
- RAPPS DISCHARGING TO A COMBINED SEWER MUST BE INSTALLED WITH TRAPPED BACK FLOW GULLY.
- ALL COVER LEVELS ARE APPROXIMATE AND ARE TO BE SET IN ACCORDANCE TO FINISHED LEVELS.

LEGEND

- MANHOLE
- INSPECTION CHAMBER
- ROAD GULLY
- SHALLOW INSPECTION CHAMBER
- RAIN WATER PIPE
- SLOT DRAIN
- BACKDROP PIPE
- SURFACE WATER PIPE
- FOUL WATER PIPE
- COMBINED SEWER
- EXISTING SURFACE WATER
- EXISTING FOUL WATER
- FLOW DIRECTION
- CONCRETE SURROUND PIPES
- PROPOSED LEVEL
- 0.00
- DEMOTES OVERLAND FLOW DIRECTION

1m 2m 3m 4m 5m 6m

REV	DATE	REVISION DETAILS	DRN	CHK	IAPP
P6	26.08.24	AMENDMENTS IN LINE WITH LA COMMENTS	GDR	STJ	SWH
P5	26.10.23	REVISED AS CLOUDED	JAL	SNH	ADS
P4	15.010.23	AMENDMENTS IN LINE WITH LA COMMENTS	GDR	DS	ADS
P3	15.06.22	AMENDMENTS IN LINE WITH RFI	GDR	DS	ADS
P2	18.05.22	AMENDMENTS IN LINE WITH MODEL	GDR	DS	ADS
P1	21.04.22	FIRST ISSUE	GDR	DS	ADS

QUEN

SUPREME DEVELOPMENTS MANCHESTER

PROJECT: BRADSTONE ROAD

DRAINAGE GA

DRAWING STATUS: PRELIMINARY

ads consult
consulting engineers

107 Mere Grange
Business Park, Leaside, St
Helens, WA9 5GG
Tel: 0151 541 4000
info@adsconsult.co.uk

SCALE: 1:100 PROJECT: 7194-ADS-XX-00-DR-C-500 PROJECT ORIGINATOR: ZONE - LEVEL - TYPE - ROLE - NUMBER: P6