
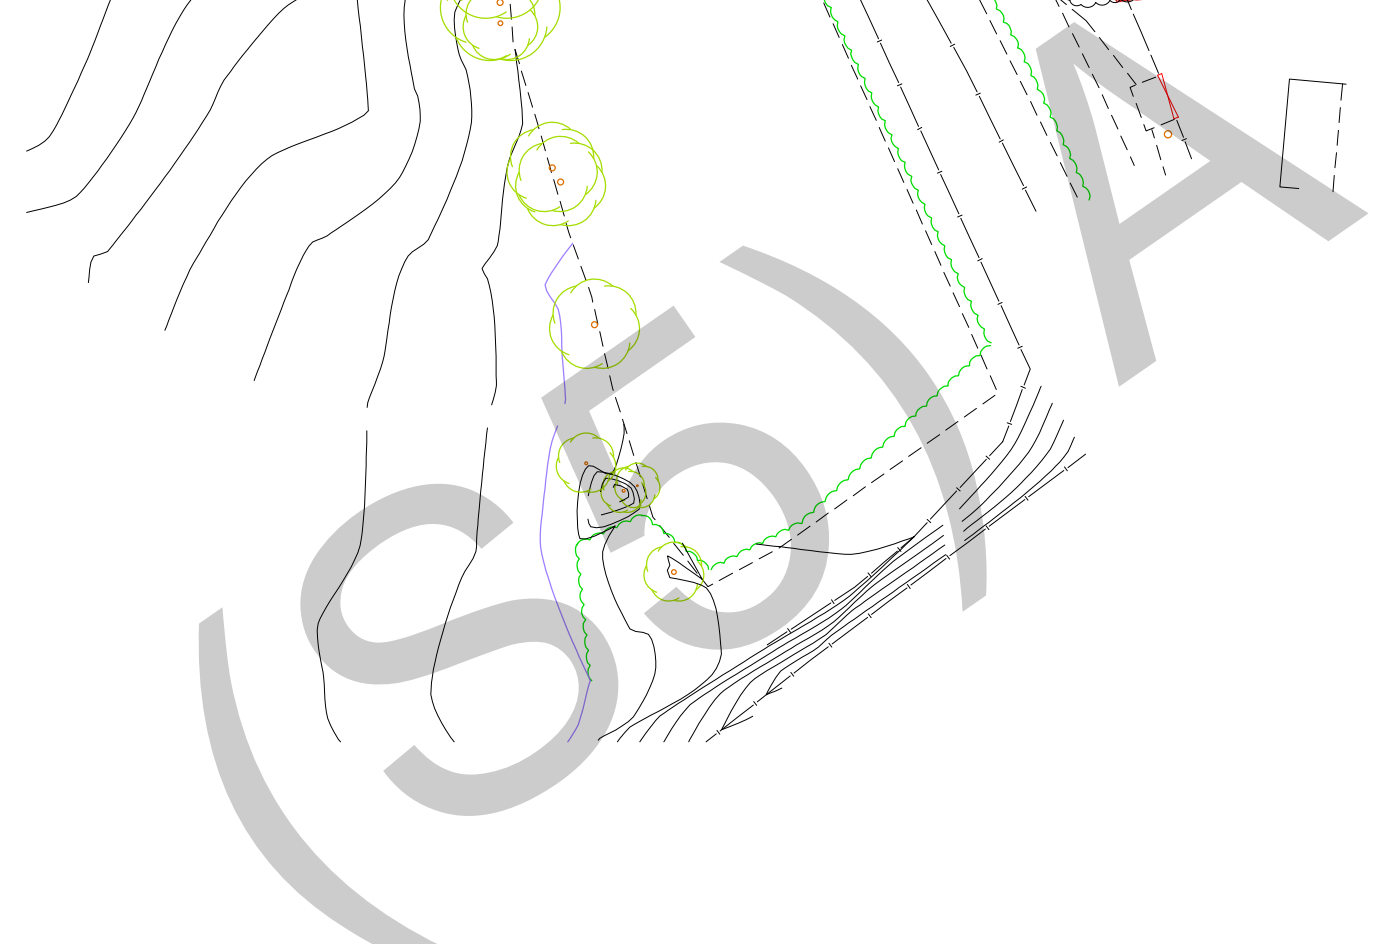





- | HARD LANDSCAPE | |
|---|--|
|  | Existing pedestrian grade tarmacadam, |
|  | Existing vehicular grade tarmacadam, |
|  | Existing asphalt wearing course to be planed off and re-laid, to engineers specification, and as NBS Q22 / 110 |
|  | Vehicular grade tarmac, to engineers specification, and as NBS Q22 / 110A |
|  | Pedestrian grade tarmac, to engineers specification, and as NBS Q22 / 110B |
|  | Existing Block Paving |
|  | Proposed PCC Paving
As NBS Q25 / 315 |
| KERBS | |
|  | British Standard PCC Kerb, Pin Kerb, laid flush
As NBS Q10 / 110B |
|  | British Standard PCC Kerb, Half Battered, laid with 100mm upstand
As NBS Q10 / 110 |
|  | British Standard PCC Kerb, Bullnose, laid flush
As NBS Q10 / 110A |
|  | British Standard PCC Kerb, Drop Kerb
As NBS Q10 / 110 |
|  | Existing kerb retained |

The following external model files are included within this drawing:

Client / Contractor	
---------------------	--

 Intelligence Buildings Infrastructure		www.ibigroup.com
Project DIXON ACADEMY		
Drawing Title EXTERNAL WORKS HARDWORKS PLAN		
Job Number 142037	Drawing Originated Date 21/02/2023	PAS 1192 Status Code S5
Scale: @A1 1:500		
Purpose CLIENT REVIEW		
Drawing Number FS0998-IBI-A-14-XX-D-L-7004		Revision P04