



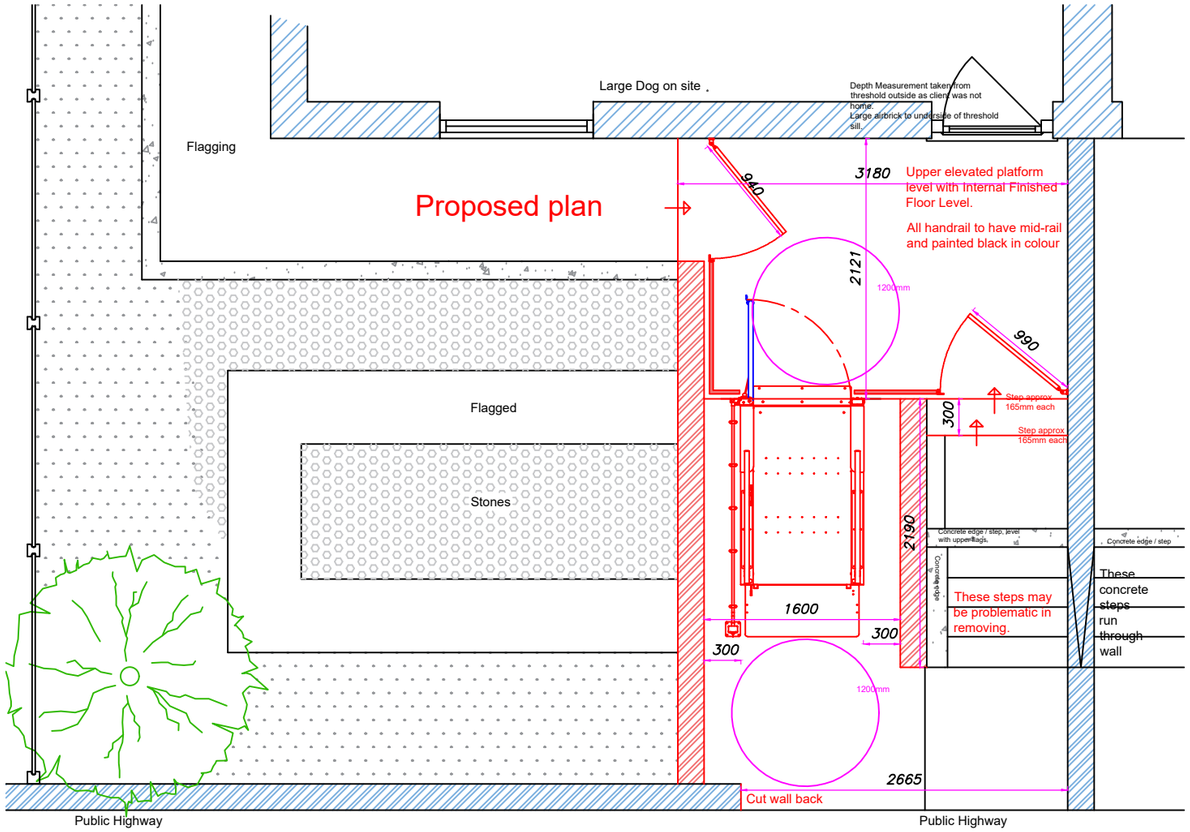

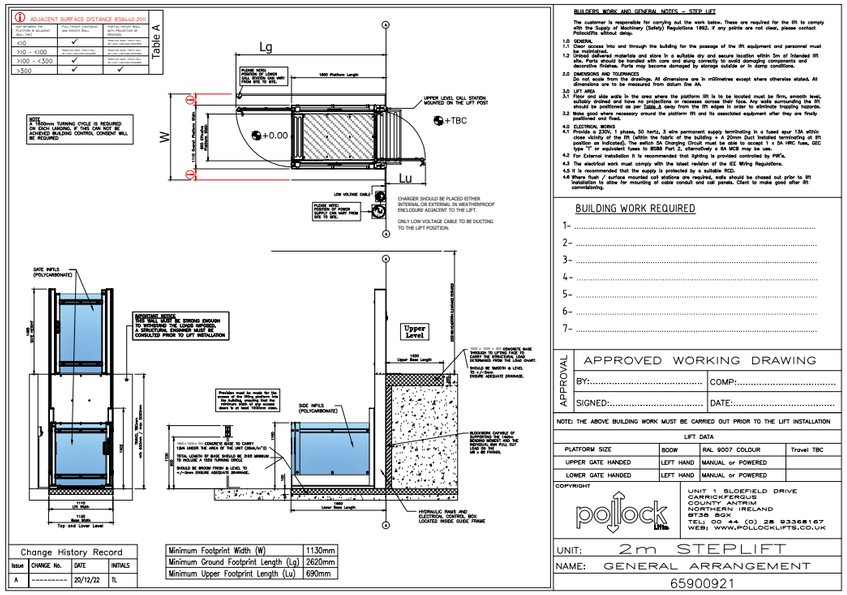

BUILDERS WORK AND GENERAL NOTES – STEP LIFT

The customer is responsible for complying out the work below. These are required for the lift to comply with the Supply of Machinery (Safety) Regulations 1992. If any points are not clear, please contact Pollocklifts without delay.

1.0 GENERAL
1.1 Clear access into and through the building for the passage of the lift equipment and personnel must be maintained.
1.2 Store all delivered materials and store in a suitable dry and secure location within 5m of intended lift site. Parts should be handled with care and stored correctly to avoid damaging components and decorative finishes. Parts may become damaged by storage outside or in damp conditions.

2.0 DIMENSIONS AND TOLERANCES
Do not scale from this drawings. All dimensions are in millimetres except where otherwise stated. All dimensions are to be measured from datum line AA.

3.0 LIFT AREA
3.1 Floor and side walls in the area where the platform lift is to be located must be firm, smooth level, suitably finished and have no projections or recesses across their face. Any walls surrounding the lift should be positioned as per Table A away from the lift edges in order to eliminate trapping hazards.
3.2 Work, over and above necessary around the platform lift and its associated equipment after they are finally installed, must be avoided.

4.0 ELECTRICAL WORKS
4.1 Provide a 230V, 1 phase, 50 hertz, 3 wire permanent supply terminating in a fused spur 13A within close visibility of the lift (within the fabric of the building + a 20mm Duct installed terminating at lift position as indicated). The switch SA Charging Circuit must be able to accept 1 x 5A HRC fuse, GEC type "T" or equivalent fuses to BS88 Part 2, alternatively a 6A MCB may be use.
4.2 For External installation it is recommended that lighting is provided controlled by PIR's.
4.3 The electrical work must comply with the latest revision of the IEE Wiring Regulations.
4.5 It is recommended that the supply is protected by a suitable RCD.
4.6 Where flush / surface mounted call stations are required, walls should be chased out prior to lift installation to allow for mounting of static conduit and call panels. Client to make good after lift commissioning.

BUILDING WORK REQUIRED

1- .....
2- .....
3- .....
4- .....
5- .....
6- .....
7- .....

APPROVAL

APPROVED WORKING DRAWING

BY:..... COMP:.....
SIGNED:..... DATE:.....

NOTE: THE ABOVE BUILDING WORK MUST BE CARRIED OUT PRIOR TO THE LIFT INSTALLATION


LIFT DATA


PLATFORM SIZE	800W	RAL 9007 COLOUR	Travel TBC
UPPER GATE HANDED	LEFT HAND	MANUAL or POWERED	
LOWER GATE HANDED	LEFT HAND	MANUAL or POWERED	

COPYRIGHT

pollock Ltd.
UNIT 1 SLOEFIELD DRIVE
CARNCHERGUS
COUNTY ANTRIM
NORTHERN IRELAND
BT38 8QX
TEL: 00 44 (0) 28 93368167
WEB: WWW.POLLOCKLIFTS.CO.UK

UNIT: 2m STEPLIFT
NAME: GENERAL ARRANGEMENT
65900921

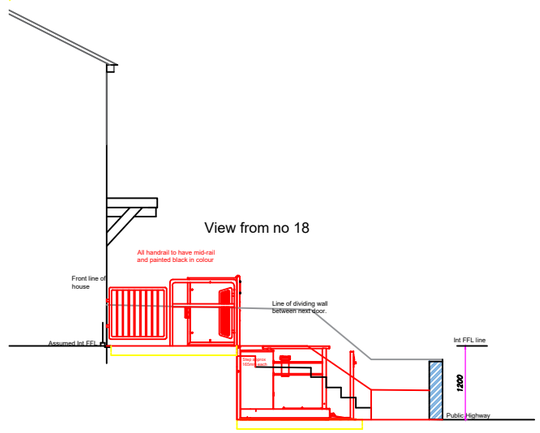

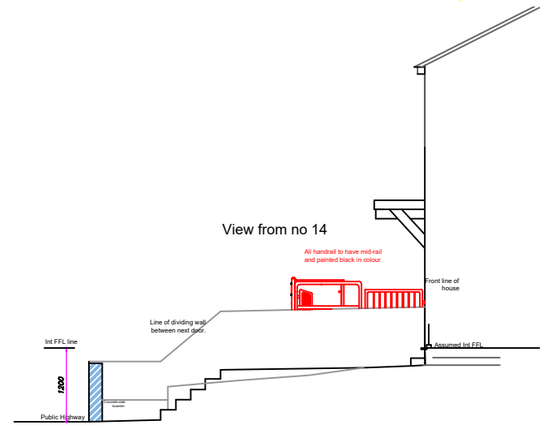

I agree to MEAP's proposed plans.

Signed .....

Date .....

Manchester Equipment & Adaptations Partnership

Manchester Local Care Organisation
Leading local care, improving lives in Manchester, with you

Scale / Paper:	Date:	Revisions / Options						Author	Project
1 : 50 @ A3 1 : 100 @ A3	12/06/2024	No.	Planning Permission	Date.	17/10/2024	Sig.	NB	Neil Brickles - Technical Officer Manchester City Council - MEAP Philips Park Road Beswick. Manchester. M11 3FU neil.brickles@manchester.gov.uk 0161 277 1704 / 07903 244482	Feasibility - Access Mrs Rohilla Arshad 16 Booth Hall Road Charlestown M9 7BW