

© COPYRIGHT NPS GROUP LTD 2017

Reference:

Example Layout: Wheelchair accessible changing room arrangement extract from Figure D63 of AISF Part D: Changing and Toilet Provision (Sport England)

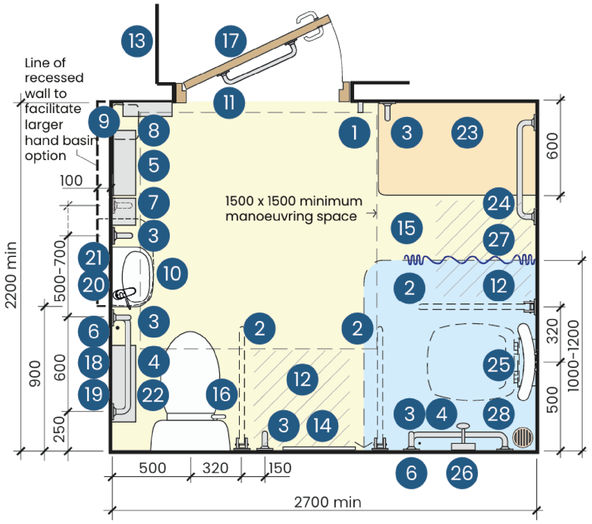


Wheelchair and sports wheelchair accessible toilet elevation arrangement extract from Figure D20 of AISF Part D: Changing and Toilet Provision (Sport England) also referenced

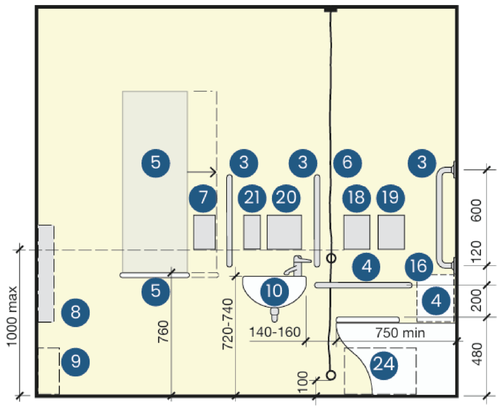


Key


1. Two clothes hooks set at 1050mm and 1400mm AFFL - *note: on proposed layout lower level hooks 1050mm AFFL have been omitted, due to concerns this can pose as a hazard to users heads when sitting down.*
2. Drop-down rail (without toilet roll holder) with top rail height matching fixed horizontal grabrail height AFFL
3. Fixed vertical grab rail with lower fixings centred at 800mm AFFL
4. Fixed horizontal grab rail centred at 680mm AFFL
5. Shelf with mirror above, min 450mm long by 150mm min set at 760mm AFFL with mirror above extending to 1900mm min AFFL - proximity to basin is optimal for stoma management
6. Alarm pull-cord with two red bangles
7. Quiet automatic hand dryer with low decibel rating
8. Menstrual products dispenser with operable zone at 750-1000mm AFFL
9. Disposal bin for miscellaneous items
10. Finger rinse basin
11. Horizontal door rail to pull side of door
12. 750mm min transfer zone adjacent to the WC and shower clear
13. Outward opening door swing to be protected (e.g. a walled corner or dead-end location)
14. Mirror with bottom edge located 600mm AFFL extending to 1900 mm min AFFL
15. Lighting levels at floor level to be 100 lux minimum but preferably 150 lux for shower areas and 200 lux for changing benches
16. WC: flush lever to wheelchair transfer side
17. Door to achieve minimum clearance requirement of 850mm min (doors should facilitate opening from outside the room for emergency situations only and open outwards)
18. Toilet paper dispenser
19. Alarm reset button
20. Paper towel dispenser
21. Soap dispenser
22. Hygiene disposal bin
23. 600mm deep fixed seat bench (smooth) at 480mm AFFL with corner and edges rounded
24. Fixed horizontal grabrail used as towel rail
25. Padded tip-up shower seat with backrest. Front edge set 650-700mm from back wall to allow lateral transfer (min 150kg carrying capacity recommended)
26. Shower controls - lever-operated, thermostatically controlled (max 41 degrees centigrade)
27. Shower curtain and rail
28. Floors laid with simple falls to flush gully or grating

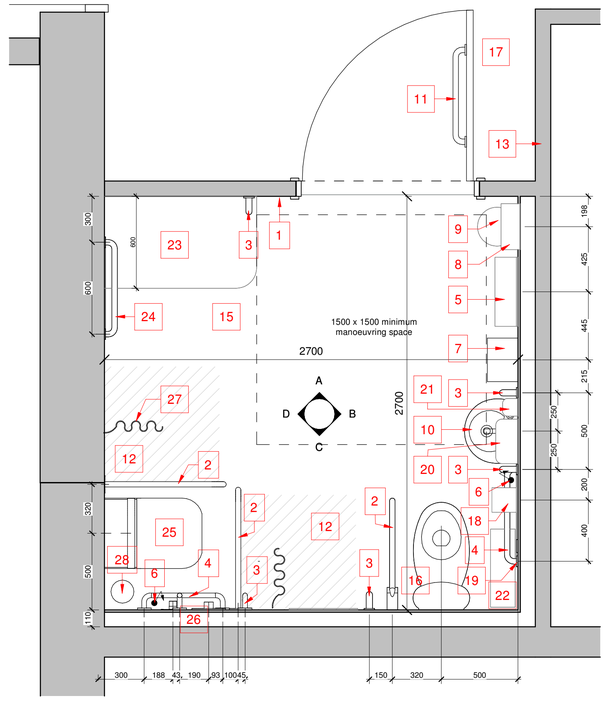


Acc. Change Plan (Annotated)
1 : 20

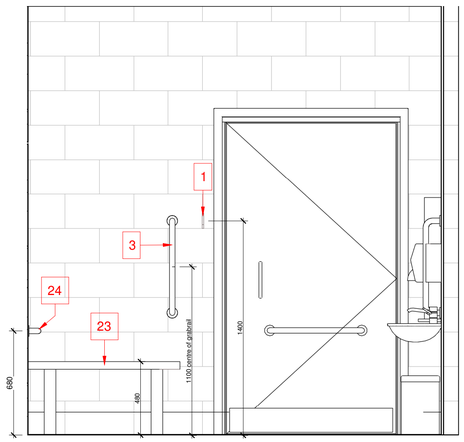


Acc. Change Elevation A (Annotated)
1 : 20

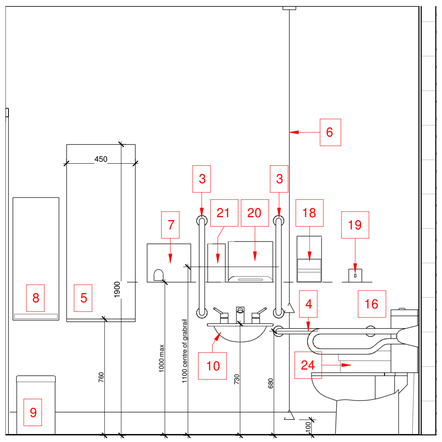

Acc. Change Elevation B (Annotated)
1 : 20

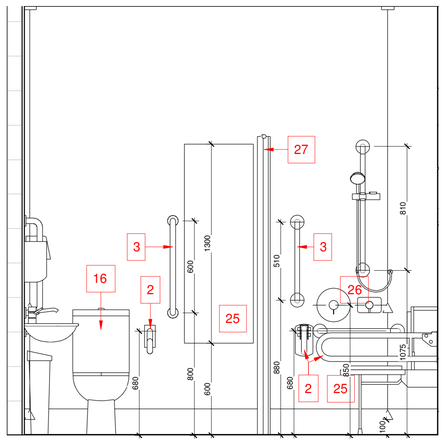

Acc. Change Elevation C (Annotated)
1 : 20

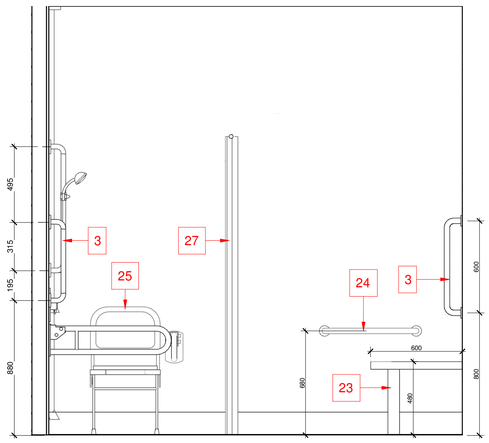

Acc. Change Elevation D (Annotated)
1 : 20

RESPONSIBILITY IS NOT ACCEPTED FOR OTHERS SCALING DIRECTLY FROM THIS DRAWING. DO NOT SCALE FROM THIS DRAWING, USE WRITTEN DIMENSIONS ONLY.

0m 0.2m 1m
1:20


ORIGINAL SHEET SIZE A1

THIS DRAWING IS PRODUCED FOR USE IN THIS PROJECT ONLY AND MAY NOT BE USED FOR ANY OTHER PURPOSE. THE ORIGINATOR ACCEPT NO LIABILITY FOR THE USE OF THIS DRAWING OTHER THAN THE PURPOSE FOR WHICH IT WAS INTENDED IN CONNECTION WITH THIS PROJECT AS RECORDED IN THE 'PURPOSE FOR ISSUE' AND 'FILE STATUS CODE'.

THIS DRAWING MAY NOT BE REPRODUCED IN ANY FORM WITHOUT PRIOR WRITTEN AGREEMENT.

© CROWN COPYRIGHT AND DATABASE RIGHTS 2019 ORDNANCE SURVEY LICENCE NUMBER 100019340.

KEY PLAN



NOTES

Rev	Description	Date	Drawn	Chkd /Appd
P01	For Planning - Discharge of Condition 47	11/06/26	NN	MR

NPS Leeds Ltd
280 Fifers Lane, Norwich, NR6 6EQ. Merrion House, Leeds, LS2 8BS
Tel: 0113 320 1630; **Email**: leeds@nps.co.uk; **web**:www.nps.co.uk

CLIENT
Manchester City Council

PROJECT
Wythenshawe Park Sports Hub

TITLE
Accessible Change - FOR PLANNING

SCALE	DISCIPLINE	PROJECT NUMBER
1 : 20	Architect	118165

DRAWING NUMBER
118165-NPS-ZZ-00-D-A-7135

REV CODE
P01

STATUS CODE	PURPOSE OF ISSUE	Drawn by	Approved by
S1	Planning	NN	MR
		Checked by	
		MR	

© COPYRIGHT NPS GROUP LTD 2017