
ARCH LINING DETAIL

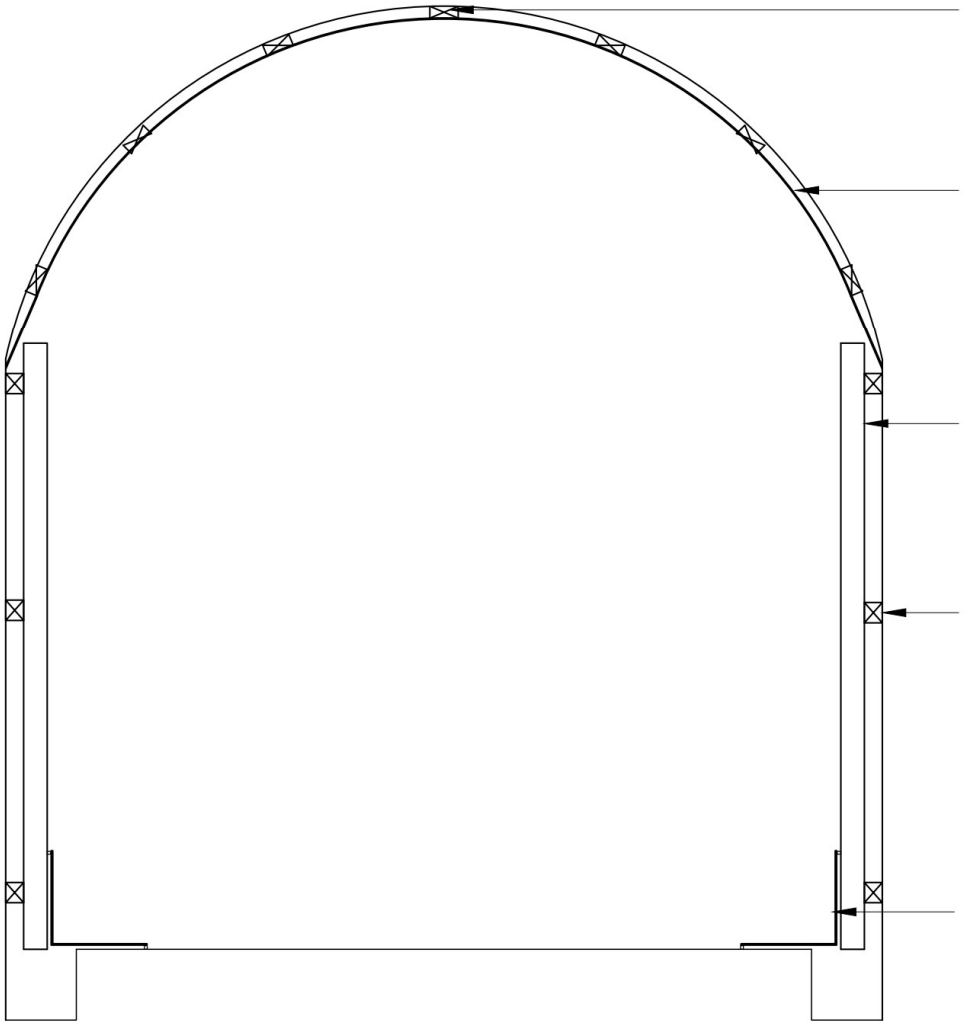

TYPICAL ARCH

CB5025 ROCKWOOD BATTENS FIXED AT CENTRES TO SUIT SHEET SIZE AROUND ARCH SOFFIT FIXED WITH 65MM STAINLESS STELL DRIVE SCREWS AT 550MM CENTRES.

0.7MM CURVED PLASTISOL STEEL PROFILE SHEETING. FIXED THROUGH PROFILE VALLEY. FIXINGS TO HAVE NEOPRENE WASHERS.

0.7MM PLASTISOL STEEL PROFILE SHEETING. FIXED THROUGH PROFILE VALEY. FIXINGS TO HAVE NEOPRENE WASHERS.

50MM GALVANISED ZED BAR FIXED AT CENTRES TO SUIT SHEET SIZE TO ARCH WALLS. ZED BARS TO BE FIXED WITH 65MM STAINLESS STEEL DRIVE SCREWS AT 550 CENTRES.

0.7MM PLASTISOL COATED GALVANISED STEEL PREIMETER SKIRTING. FIXED WITH A MIN 4 NO. STITCHERS PER 3000MM LENGTH. 2NO. BUTYL SEAL STRIPS TO PERIMETER OF CONCRETE SLABS INCLUDING MASTIC SEALENT TO JOINTS.

All battens for the 325 Deansgate scheme to be attached into the mortar joints, not brickwork