CLD LockMaster

Double and single leaf swing gates


CLD Physical Security Systems



Find out more
Scan for more information

Description

CLD LockMaster™ Swing Gates - single and double - fit seamlessly with every fencing system we offer. The rigid welded steel wire mesh panels are fixed to a steel SHS surround using a solid clamp bar and secure fixings, making them extremely hard-wearing and giving them a real heavy-duty feel. Supplied with steel drop bolt sockets to be set in concrete, all gates feature adjustable anti-lift-off hinges, making them incredibly difficult to vandalise. Fitted with a swing bolt lockcase and eurocylinder as standard, security can be to be enhanced with options from our Locking and Closing range. You can also top gates with any of the deterrents from our Active Anti-Intruder range.

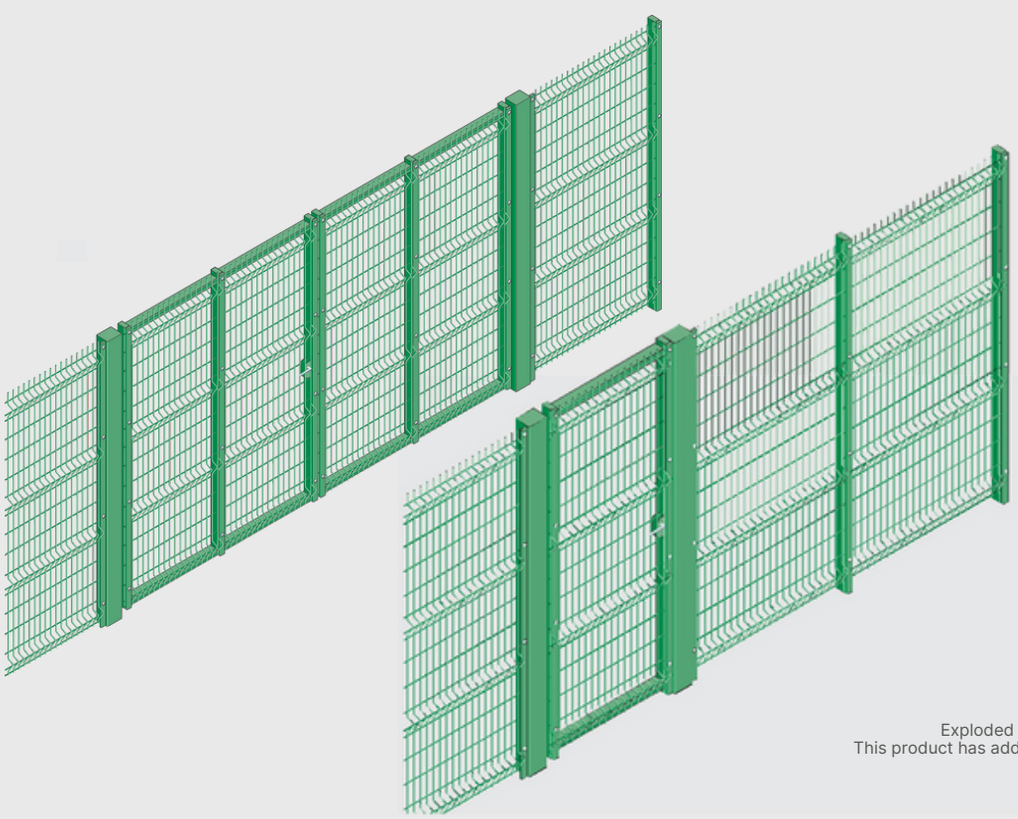

Exploded view of post and fixing details for the CLD LockMaster
This product has additional features not demonstrated for security reasons

Features

- Wide range of locks and security options available
- Anti-lift off hinges on heavy duty posts and frame
- Gate infill to match fence system or clients own design

BRITISH MADE

NBS

cld-systems.com

CLD LockMaster

Double and single leaf swing gates

Product Technical Information

Standard	BS1722-14:2017 BS EN ISO 141:2009 BS EN 13438:2013

Description	Open mesh steel security gate system with mesh infill, to match fencing
Panel Options	Options to be chosen from the CLD range of mesh fencing panels to match fenceline.
Panel Width	Range of widths to suit customer requirements
Available Heights	Range of heights to suit customer requirements.
Finish	Polyester powder-coated to match mesh infill. Any RAL colour
Post Dimensions	80mm x 80mm minimum
Fixings	Dependant on mesh panel type
Foundations	Set posts in holes 450mm square x 950mm deep min. Note: Contractor/ client is responsible for the foundation size suitable for the ground conditions
Configuration	Double leaf/ single leaf / rear hung, front hung or centre hung as required
Gate Frame	To suit mesh infill panels: Vertical stiles: minimum of 50mm x 50mm x 3mm square hollow section Horizontal rails: minimum of 50mm x 50mm x 3mm square hollow section Fully welded construction. Galvanised and powder-coated to match fencing
Locking	To client specification
Hinges	Minimum of 3 x welded hinge sets with M20 (minimum) eye bolts
Warranty	Minimum of 15 years against manufacturing defects.
Notes	All dimensions are nominal, for further information please contact CLD Fencing Systems. Information is correct at time of production. As part of our policy of continuous improvement, we reserve the right to alter product specification without notice.

System Details

Disclaimer

Fencing should be installed in accordance with BS 1722-14. Every care has been taken to ensure that all information provided on this data sheet is accurate. CLD Fencing Systems Ltd reserves the right to change product specification at any time.
Please ensure that you have the latest information which can be found on our website or by contacting our team.

Document Reference - CLD_LockMaster_DS_20220222