

PERMEABLE DRIVEWAY
Driveline Priora
Priora® 200 x 100 x 60 Bracken
Mix blocks from a minimum of 3 of packs (if possible) to ensure the correct colour blend.
Take blocks from vertical columns rather than horizontal layers unless otherwise stated. concrete block paving is manufactured at different factories therefore colour may vary slightly across these works of manufacture.
Jointing sand should be introduced before the initial vibration and a rubber-faced matting on the vibrating plate should be used.
Each 60mm block features unique, patented Priora nib, designed for effective water management.
When installed correctly, no drainage, tarmac, or soakaways are required.
Must be laid using 20mm and 6mm clean crushed stone aggregate to BS EN 13242 and BS EN 12620 standards.

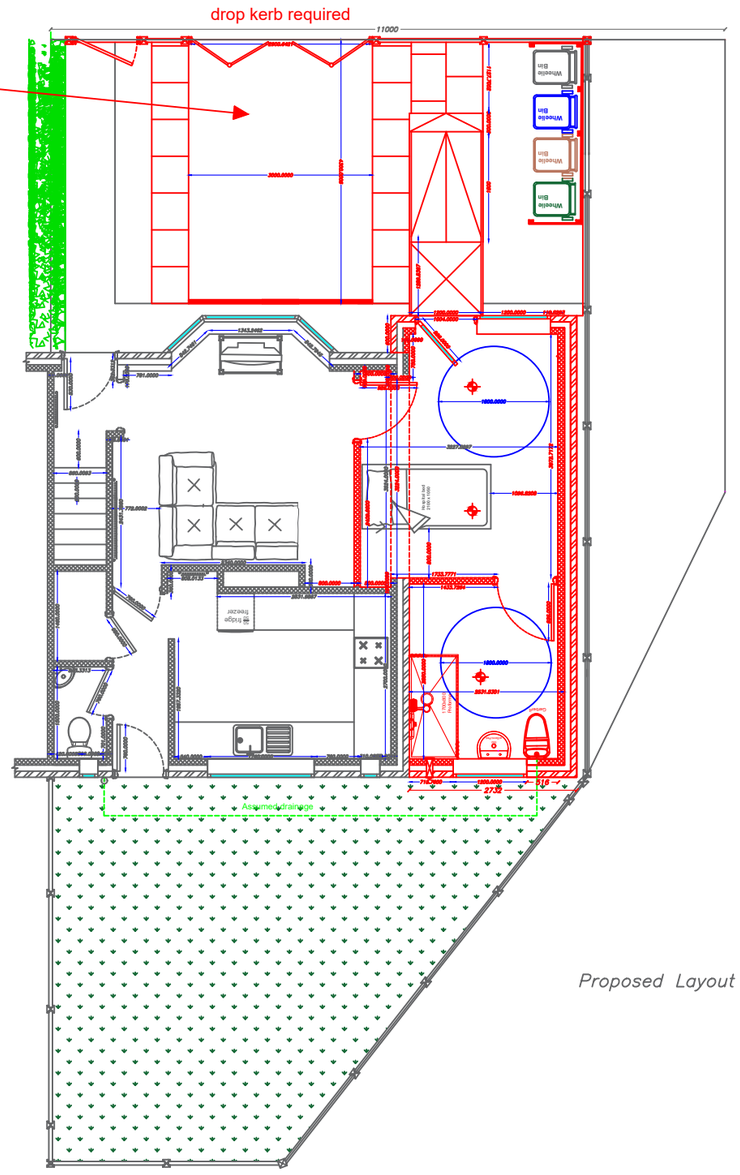

Proposed Layout

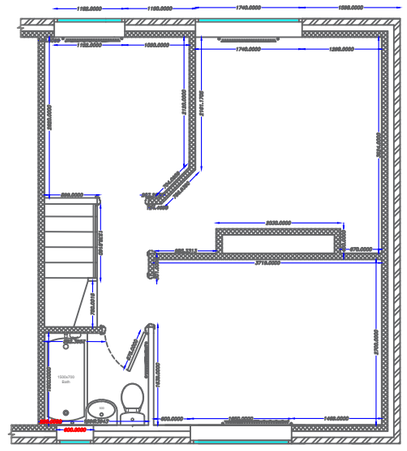

First floor

Manchester Equipment & Adaptations Partnership Technical Officer Service Phillips Park Rd Beswick, Manchester, M11 3FU	Applicants name: Ms Samantha Reeves Property address: 1 Micklehurst Ave Didsbury Manchester M20 2XR	Revisions:08/07/2026 **REV SC -**	Drawn By: Stephen Crossley Scale: **1:20**	Date:04/03/2026 Paper Size: **A3**	MEAP Manchester Equipment & Adaptations Partnership