SPACE SAVING
COST EFFECTIVE
INNOVATE 300

INNOVATE 300

Public Access | Commercial | Exterior | Interior



innovate lifts

OPEN PLATFORM LIFT

Innovate 300 is an Open Platform Lift, also known as Wheelchair Lift, which provides internal or external vertical travel up to 3 meters.

Our Open Platform Lift can accommodate changes in level from 600 mm up to 3000 mm in commercial and domestic environments and is appropriate alternative solution to a fully enclosed platform lift.

Innovate 300 is specifically designed for applications with little or no alterations to existing buildings. The open type design offers an aesthetically pleasing solution with brushed stainless steel finish as option. The lift provides a safe and easy way to gain access to a property where stairs would otherwise prevent wheelchair access.


It is designed to give customers choice and flexibility.

Innovate 300 Wheelchair Lift is a space saving and cost effective way to provide access for everyone to your home or workplace.

FEATURES


- Modern lightweight design
- Stainless steel construction as option
- Low space requirements
- High level of security
- Silent operation
- Simple to use
- No pit required
- Simple to install and easy to service
- Overall low maintenance and running costs

TOP FLOOR GATE
Stainless steel finish for external use
850 x 1100 mm (Manual opening) (Left)

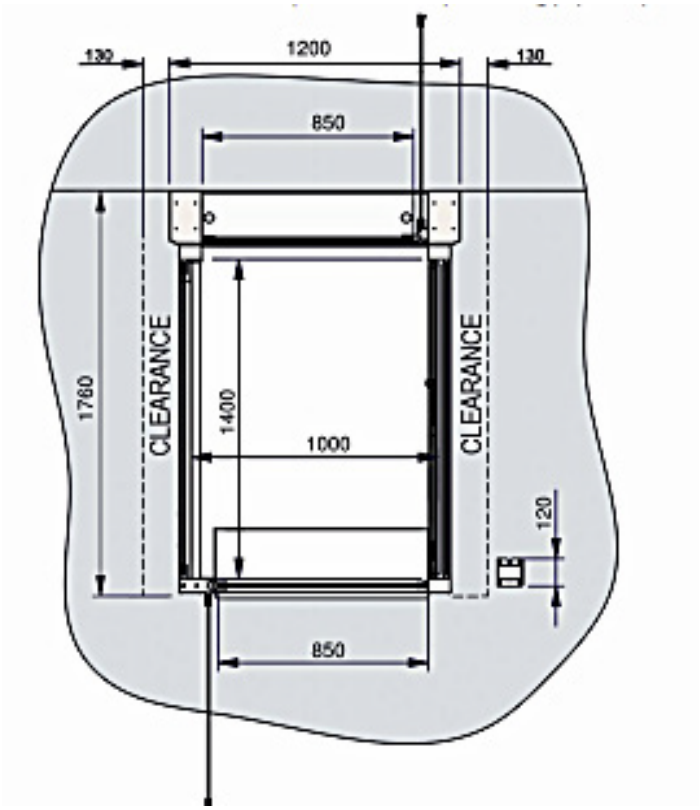

BOTTOM FLOOR GATE
850 x 1100 mm (Manual opening) (Left)

BELLOWS UNDER THE PLATFORM

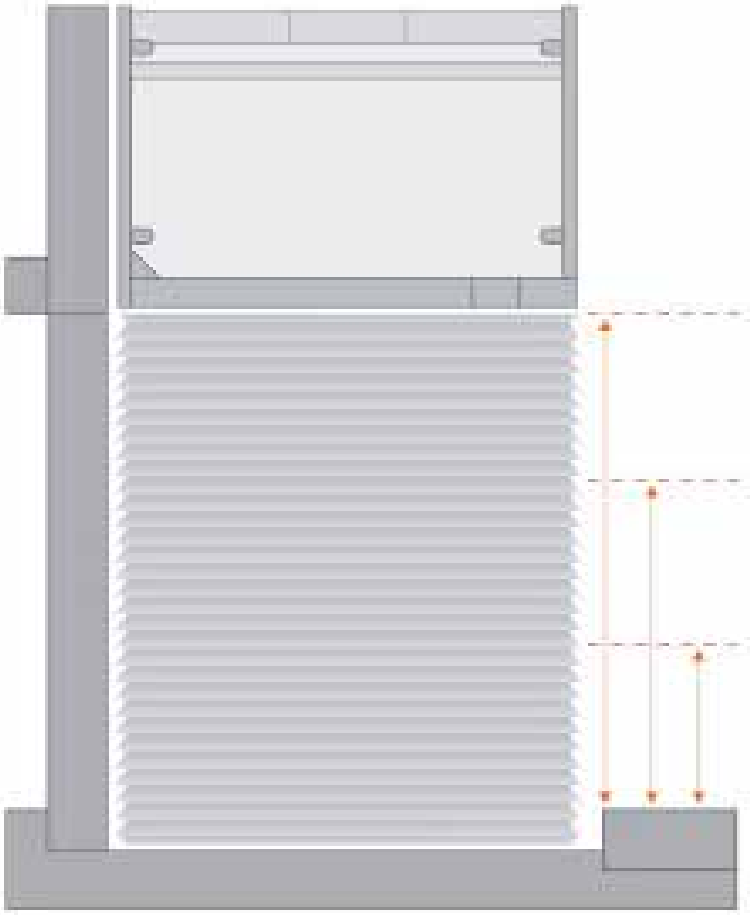

3 LIFTING HEIGHTS

From 2010 to 3000 mm,
Pit = 350 mm,
1500 euros.

From 1010 to 2000 mm,
Pit = 260 mm,
1200 euros.

From 600 to 1000 mm,
Pit = 170 mm,
1100 euros

FIXATIONS

On ground floor, at the four corners of the below, and at the platform, fixations will be provide.



OTHER OPTIONS

PLATFORM

900 x 1400mm

1000 x 1400mm

GATE

Automatic upper gate

Automatic lower gate

CONTROL

Configurate control side

Dual control on the platform

Auto dialer on the platform

Remote control

Braile on the control

SAFETY

Battery emergency lowering device

FINISH

Painted in any RAL colour

Brushed Stainless Steel

PLATFORM SIZE POSSIBLE:

1100 x 1400 mm
(shaft 1300 x 1760 mm).
Gate opening = 950 mm



















SPECIFICATIONS

USER GROUP	Ambulant and wheelchair users
SUITABILITY	For internal or external use
TRAVEL	From 600 mm up to 3000 mm
NUMBER OF STOPS	2
MAXIMUM CAPACITY	500 kg
PLATFORM SIZE	1100 x 1400 mm (standard)
	1300 x 1770 mm (standard)
EXTERNAL DIMENSIONS	950 x 1100 mm (standard) with auto closers
GATE	1100 mm
CABIN HEIGHT	Belt
DRIVE TYPE	220-240 V, 1 phase, 16A
POWER	380-400 V, 3 phase, 10A, 50 Hz
LIGHTING	Controls illuminated
SAFETY EDGE	Safety edge-under platform proximity sensors
HANDRAIL	Integrated to lift cabin (on both sides)
MACHINE ROOM	Integral to guide rails
FLOOR	Anti slip rubber (Anti slip diamond plate for outdoor version)
FINISH	RAL 9006 (Anodized aluminum)



innovate lifts