

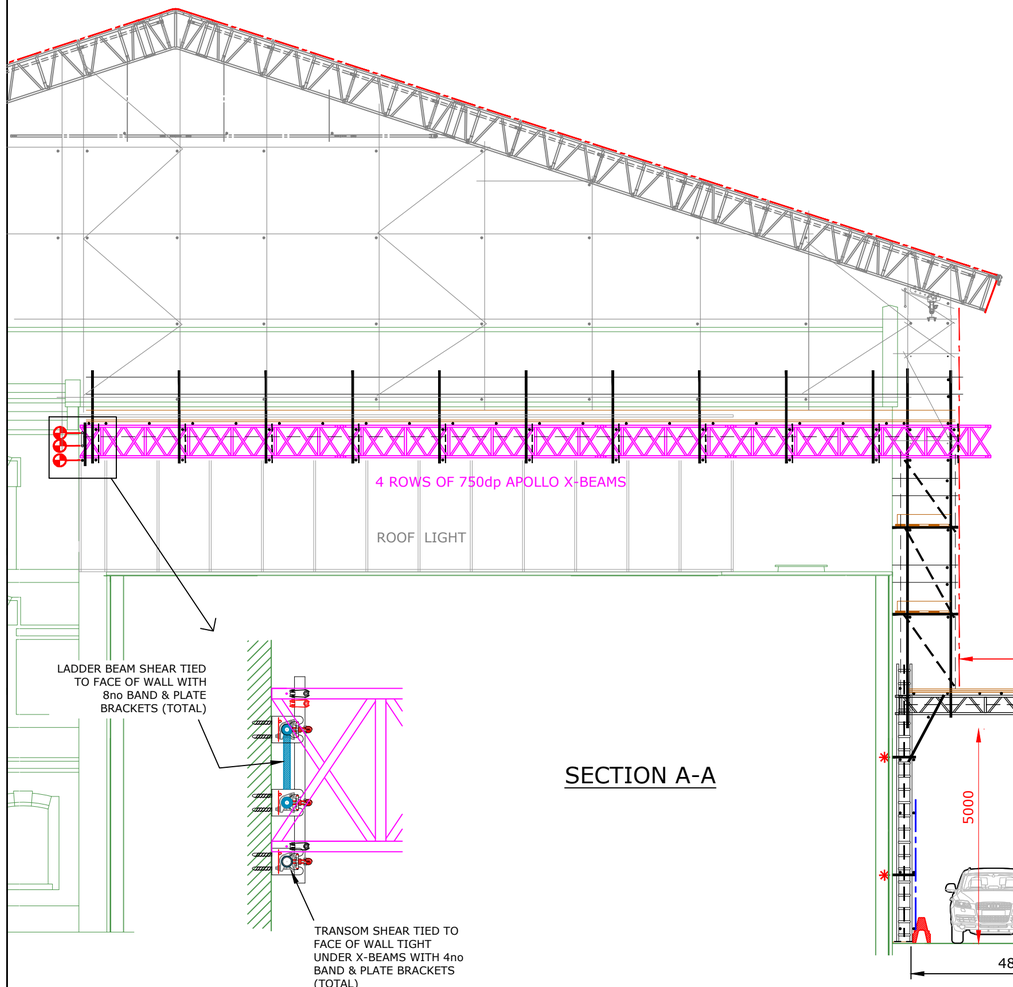



SECTION A-A

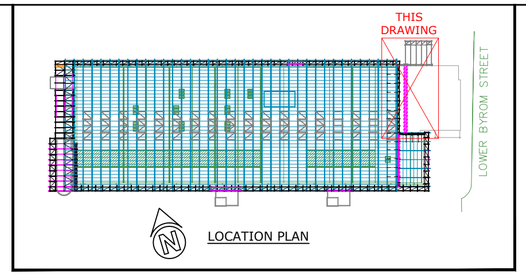


LOCATION PLAN

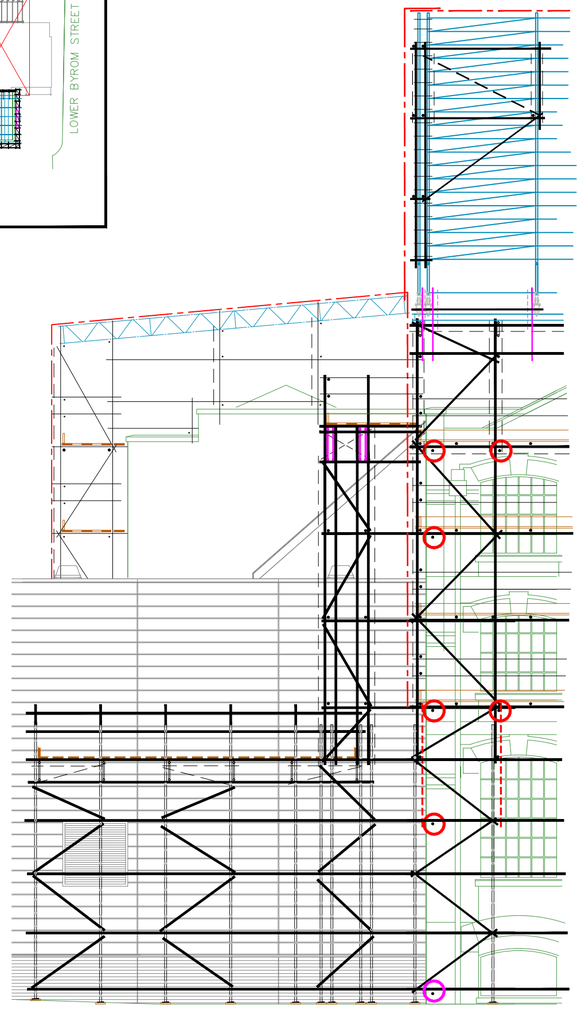


NORTH ELEVATION

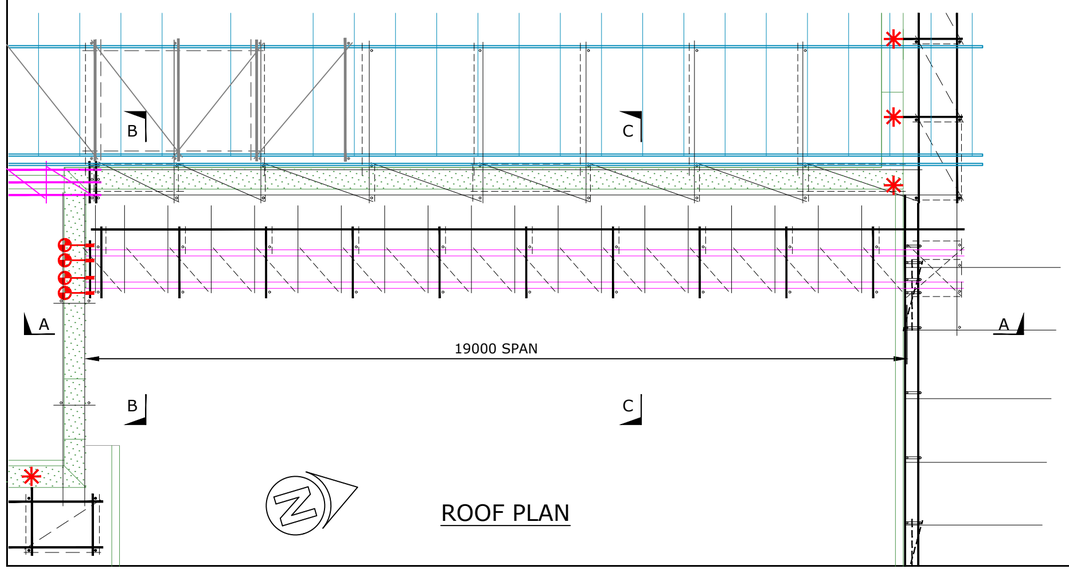

ROOF PLAN

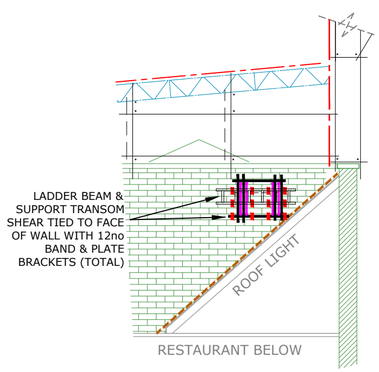

SECTION B-B

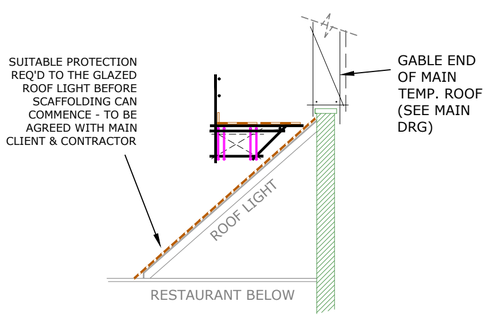

SECTION C-C

GENERAL NOTES

A This drawing & any associated documents are the property of..... SCIENCE MUSEUM GROUP
The drawing is confidential and it and the copyright therein are the property of P.B.S.D. Ltd.

B Scaffold to be constructed in full compliance with NASC documents TG20, SG4 and all relevant statutory regulations, by suitably qualified & competent operatives.

C Scaffold built from steel tubes and steel fittings conforming to BS EN39 and BS EN74, unless noted otherwise.

D All Timber scaffold boards used are to be 225mm x 38mm thk in accordance with BS2482 unless noted otherwise.

E Scaffold to be constructed using load bearing fittings throughout, except when fixing intermediate bearers directly below platform levels and securing boards or toeboards.

F This drawing has been prepared from details supplied to us by the enquirer/client who should check that we have correctly interpreted their requirements and that all loadings, dimensions, details, and erection sequences are correct and practicable. Any changes to the design required due to the absence of detailed information or a suitably completed 'Design-plan' will be at their cost.

G The client is to prepare and ensure that any foundations/supports are suitable for supporting the loads imposed upon it by the scaffold including its work load.

H No sheeting, wind protection or fans, (unless already shown) are to be added to the scaffold structure detailed on this drawing without prior reference to P.B.S.D. Ltd.

J The enquirer/client is to ensure that adequate facilities for tying or anchoring the scaffold are made available and that the structure, building, ground or concrete to which the scaffold is tied or anchored is capable of withstanding the Additional imposed loads.

K No ties or braces are to be removed or any modifications to be made to the scaffold without prior reference to P.B.S.D. Ltd.

L The enquirer/client is to design, supply and fix all necessary auxiliary equipment and is to ensure that such auxiliary equipment is capable of safely transmitting the loads to the scaffold tubes.

M The enquirer/client will be responsible for setting out and critical working levels of scaffolding or similar equipment used as a system of support.

N All dimensions are as stated or as calculated. Drawings must not be scaled.

O All working platforms must at all times be in compliance with relevant statutory regulations.

P The Construction (Design & Management) Regulations 2015, require that work cannot begin until the client is aware of and understand their duties outlined in the above mentioned regulations. These duties are detailed in the approved code of practice "Managing Construction for Health + Safety" or contact P.B.S.D Ltd. for specific advise.

THIS DRAWING TO BE READ IN CONJUNCTION WITH THE FOLLOWING DRAWINGS:

SMG7446-00-01 ; SCAFFOLD G.A. FOR TENDER
SMG7446-00-02 ; SCAFFOLD ERECTION PHASING.
SMG7446-00-03 ; TEMP. ROOF OVER ENTRANCE
SMG7446-00-05 ; SCAFFOLD ANCHOR & TIE DETAILS

PROVISIONAL ONLY
NOT TO BE USED FOR CONSTRUCTION

REV.	DESCRIPTION	DRAWN	DATE
.			
.			
.			

SCIENCE MUSEUM GROUP

CLIENT: SCIENCE & INDUSTRY MUSEUM, M/CR

SITE: SCIENCE MUSEUM GROUP

TITLE:
NEW WAREHOUSE PROJECT
SCAFFOLD ACCESS BRIDGE OVER RESTAURANT

SCAFFOLD DESIGN LTD
P.B. SCAFFOLD DESIGN LIMITED
PRESTIGE COURT BUSINESS CTR,
BEZA ROAD,
LEEDS,
LS10 2BD
t: 0113 3900150
e: info@pbscaffolddesign.co.uk
w: www.pbscaffolddesign.co.uk

DATE:	DRAWN BY:	APPROVED BY:
13/09/23	R.Park	P.J.B

SCALE	DRAWING No.	REV.
(A2) 1:100	SMG7446-00-04	