
A1

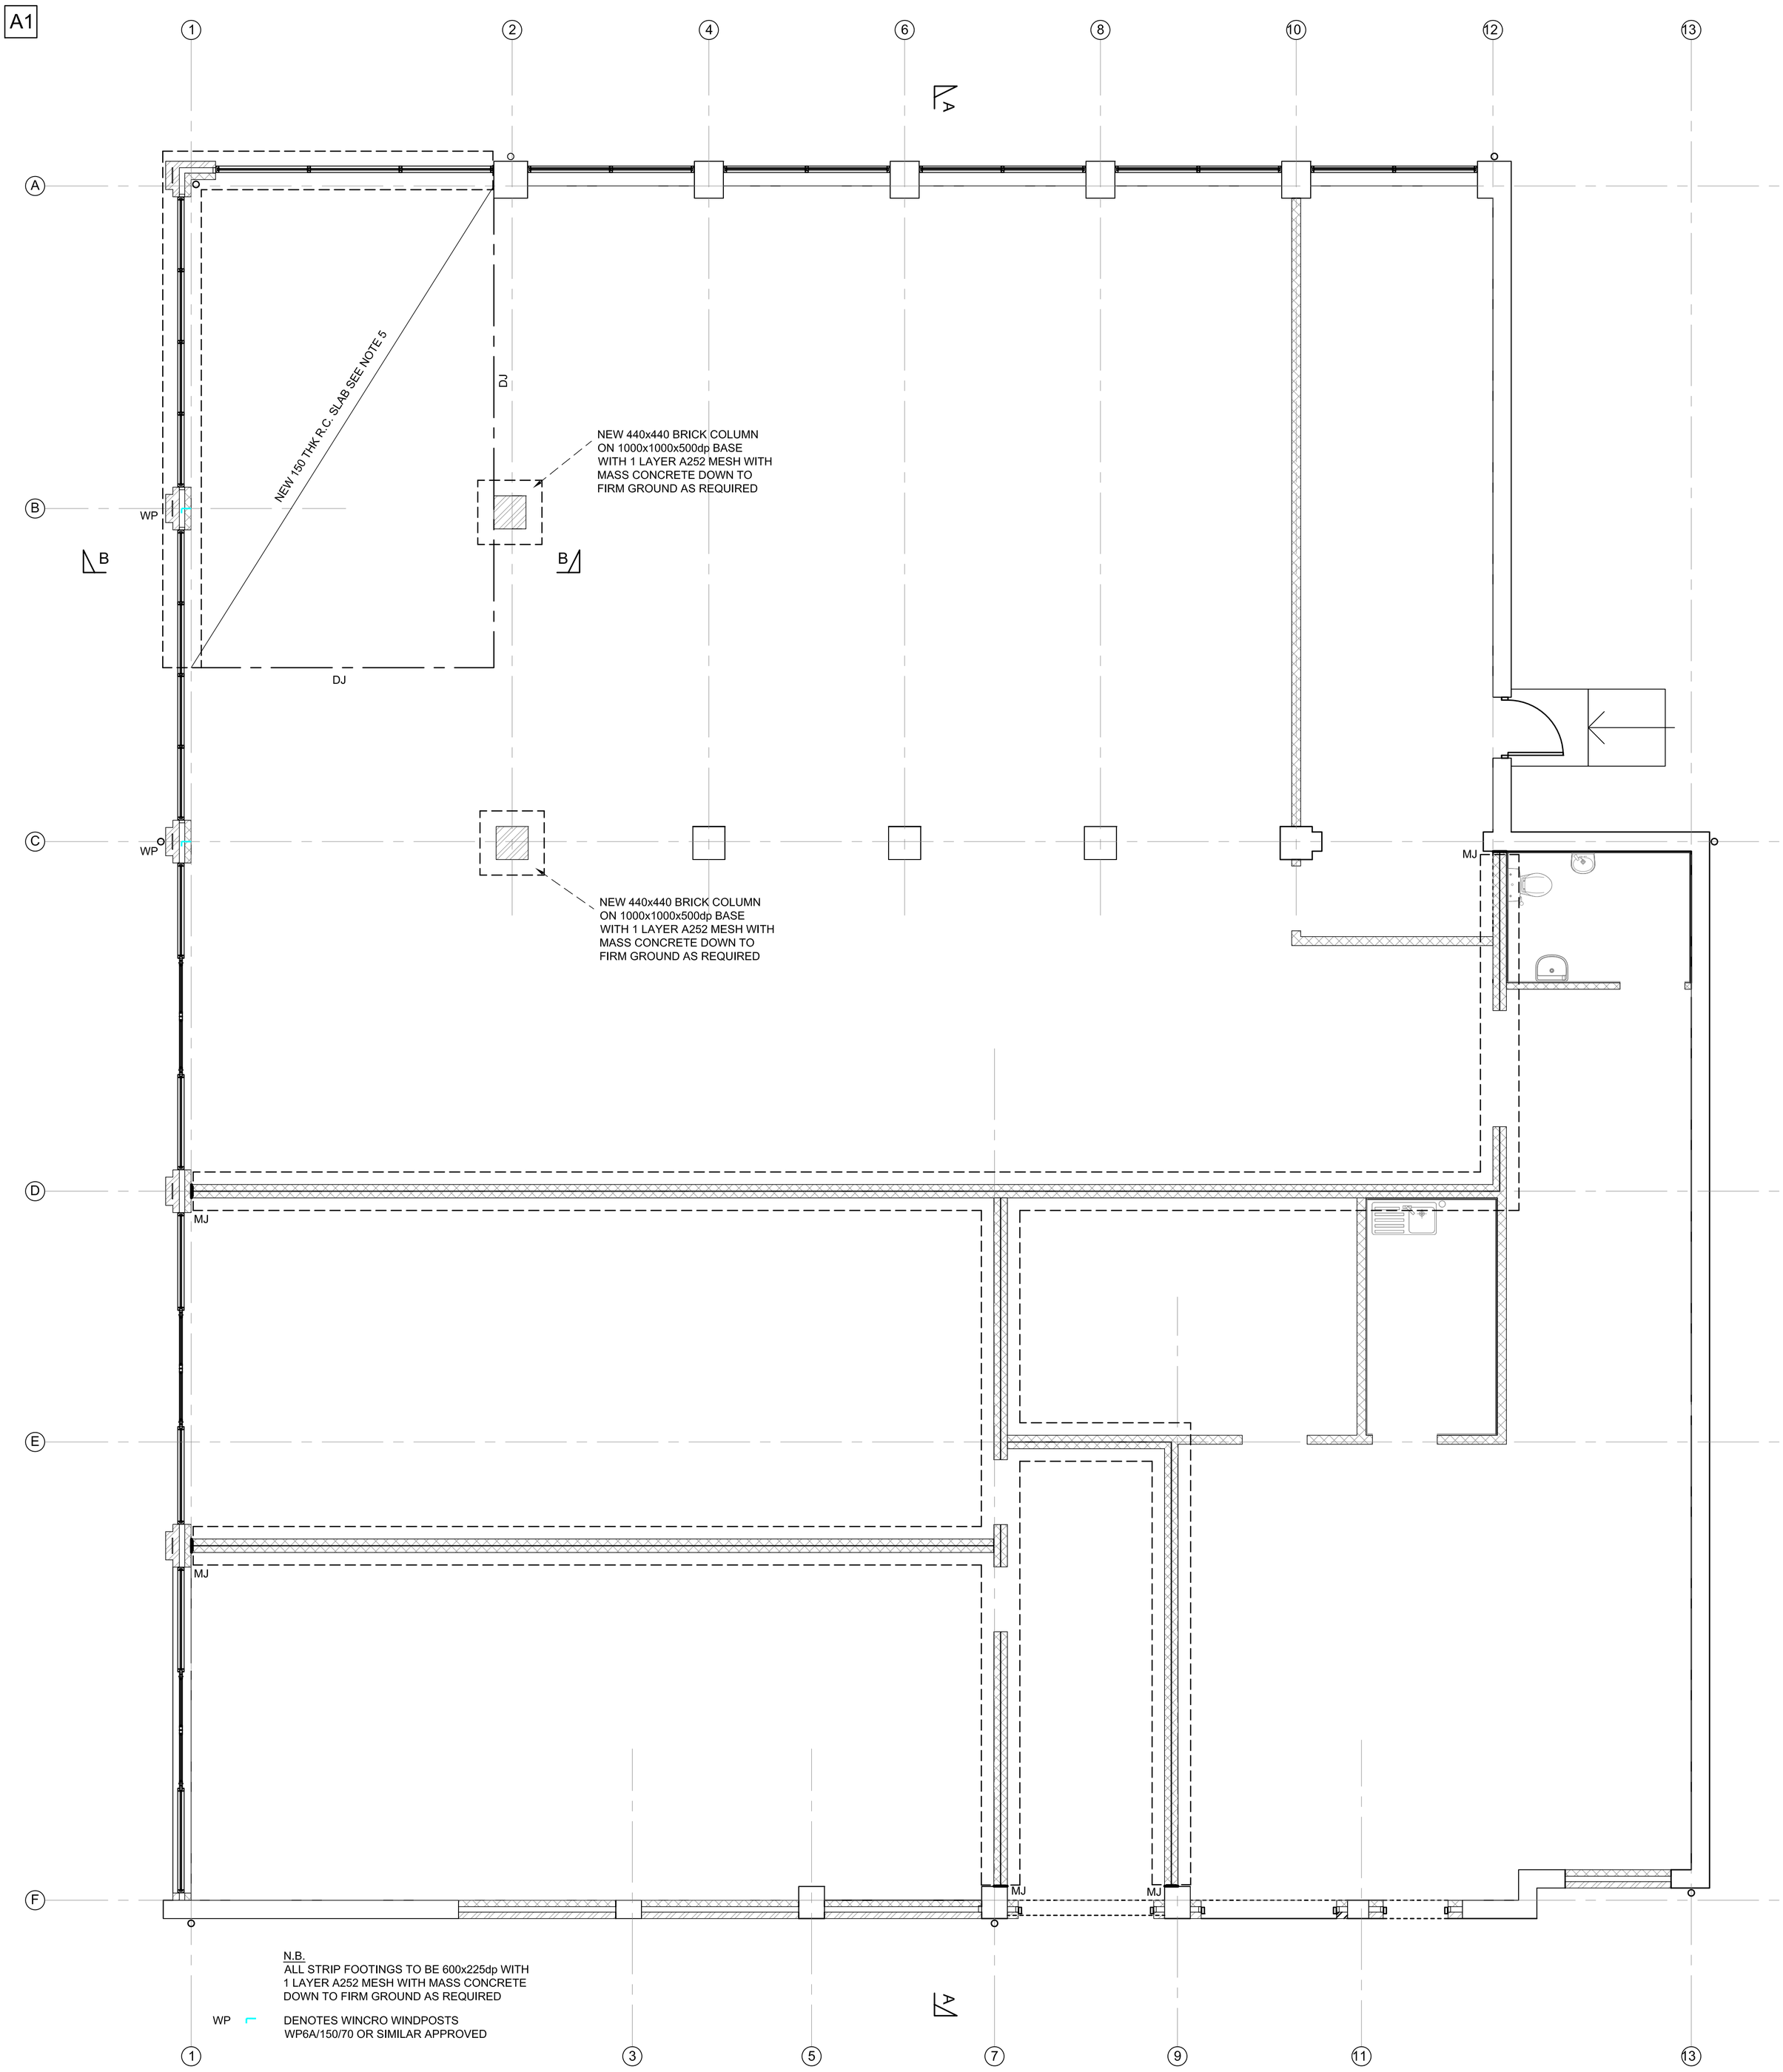

N.B.
ALL STRIP FOOTINGS TO BE 600x225dp WITH
1 LAYER A252 MESH WITH MASS CONCRETE
DOWN TO FIRM GROUND AS REQUIRED

WP DENOTES WINCRO WINDPOSTS
WP6A/150/70 OR SIMILAR APPROVED

N.B.
FOR DETAILS & SECTIONS REFER TO ON THIS DWG
REFER TO DWG No. 12860/03

NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE SPECIFICATION AND ALL OTHER DRAWINGS ISSUED BY THE ARCHITECT & ENGINEER.

2. DO NOT SCALE, WORK TO GIVEN DIMENSIONS.

3. ALL DIMENSIONS TO BE CHECKED BY CONTRACTOR PRIOR TO CONSTRUCTION.

4. CONCRETE TO BE GRADE RC28/35 TO BS 8500 & BS EN 206-1. CEMENT TO BE CEM1 42.5 CONFORMING TO BS EN 197-1. THE USE OF PFA OR GGBS WILL NOT BE PERMITTED.

5. 150 THK SLAB REINFORCED WITH 1 LAYER A252 MESH 1 TOP ON DPM ON INSULATION ON MIN. 150 WELL COMPACTED GRANULAR FILL. DPM & INSULATION TO ARCHITECTS DETAILS.

6. ALL STRUCTURAL STEELWORK IS TO BE A MINIMUM GRADE S275 & IS TO BE SOURCED FROM ACCREDITED SUPPLIERS & PROVIDED BY ACCREDITED FABRICATORS. STRUCTURAL STEELWORK TO BE MARKED WITH APPROPRIATE CE MARKING IN ACCORDANCE WITH EXECUTION CLASS EXC2 TO BS-EN-1993-1-1.

7. STEELWORK IS TO BE SHOT BLASTED & PAINTED WITH HIGH BUILD UP ZINC PHOSPHATE PRIMER TO A MINIMUM D.F.T. OF 75 MICRONS.

8. ALL STEELWORK IN CAVITIES TO BE PAINTED WITH 2 COATS OF BITUMEN PAINT.
ALL STEELWORK BELOW GROUND TO BE ENCASED IN 100mm CONCRETE SURROUND.

9. NEW MASONRY INNER LEAF TO BE AGGREGATE CONCRETE BLOCKWORK WITH A MINIMUM COMPRESSIVE STRENGTH OF 7.3N/mm².

Rev	Description	By	Date	Chk'd

Marston & Grundy LLP
Consulting Engineers
Priory House, Ellesmere Ave
Marple, Stockport, Cheshire, SK6 7AN
Telephone: 0161 427 7231
Email: mail@marstonandgrundy.com

Client
DPPS TRADING LTD

Project
GREENBROW ROAD
NEWALL GREEN

Drawing
G.A. OF FOUNDATIONS &
GROUND FLOOR SLAB

Purpose of Issue	Status

Scale @ A1	Date	Drawn	Checked
1:50;1:20	09.05.23	CDB	DAG

Project No.	Drawing No.	Revision
12860	01	