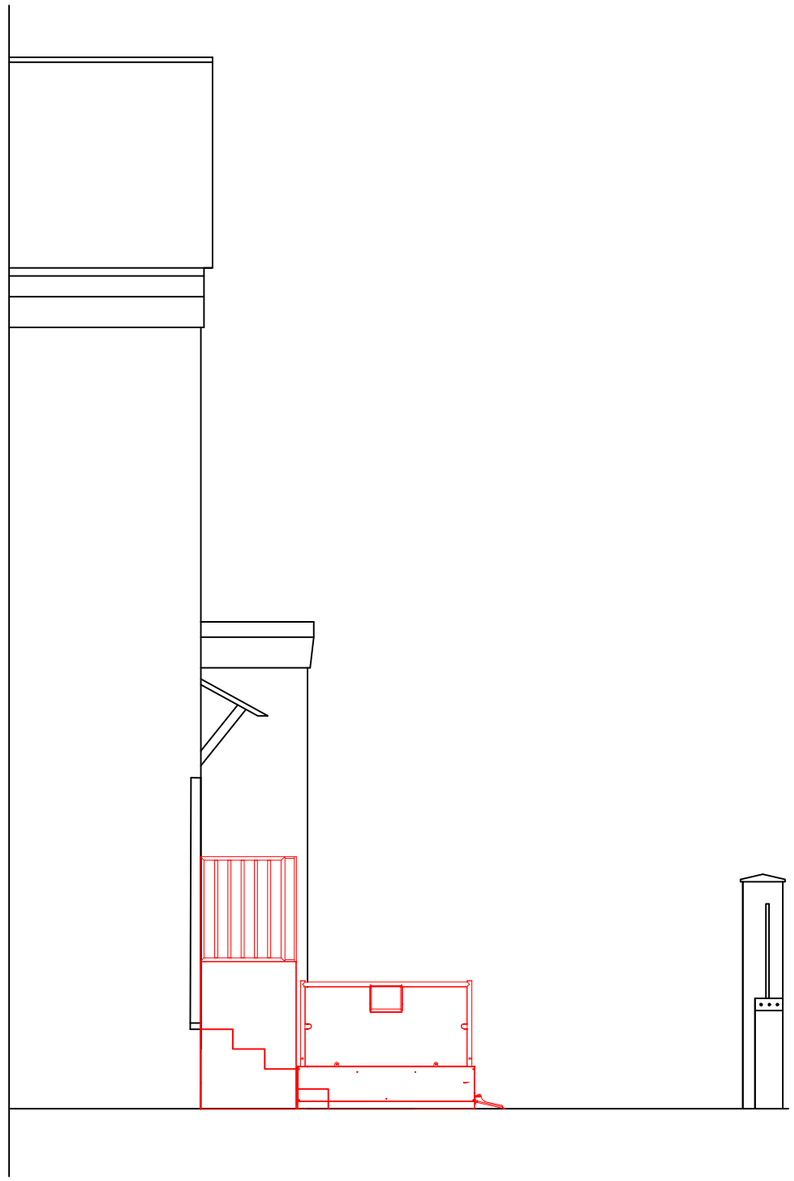


PROPOSED SIDE ELEVATION

Work required for the lowering of the step to enter the front amenity space

Excavate section of the client blockwork yard to form level access for lift position and access.

This is to be excavated down to the same level as the public footpath and is to be 16500mm wide x 4590mm long.

Once excavated lay solid concrete base which is to be 1650mm wide x 4590mm long x 100mm deep minimum.

The section that meets the public footpath is to be graded to meet the existing levels.

The front gate is to be lowered to suit the new level at access.

Manchester Equipment and Adaptation Service **Philips Park Office** **Manchester** **M11 3FU**	Project: 6 FRASER ROAD MANCHESTER M8 4HH	Drawn By: **CB** Scale: **1/50**	Date: 02/09/2024 Drawing No: **1**

MEAP Manchester Equipment & Adaptations Partnership