


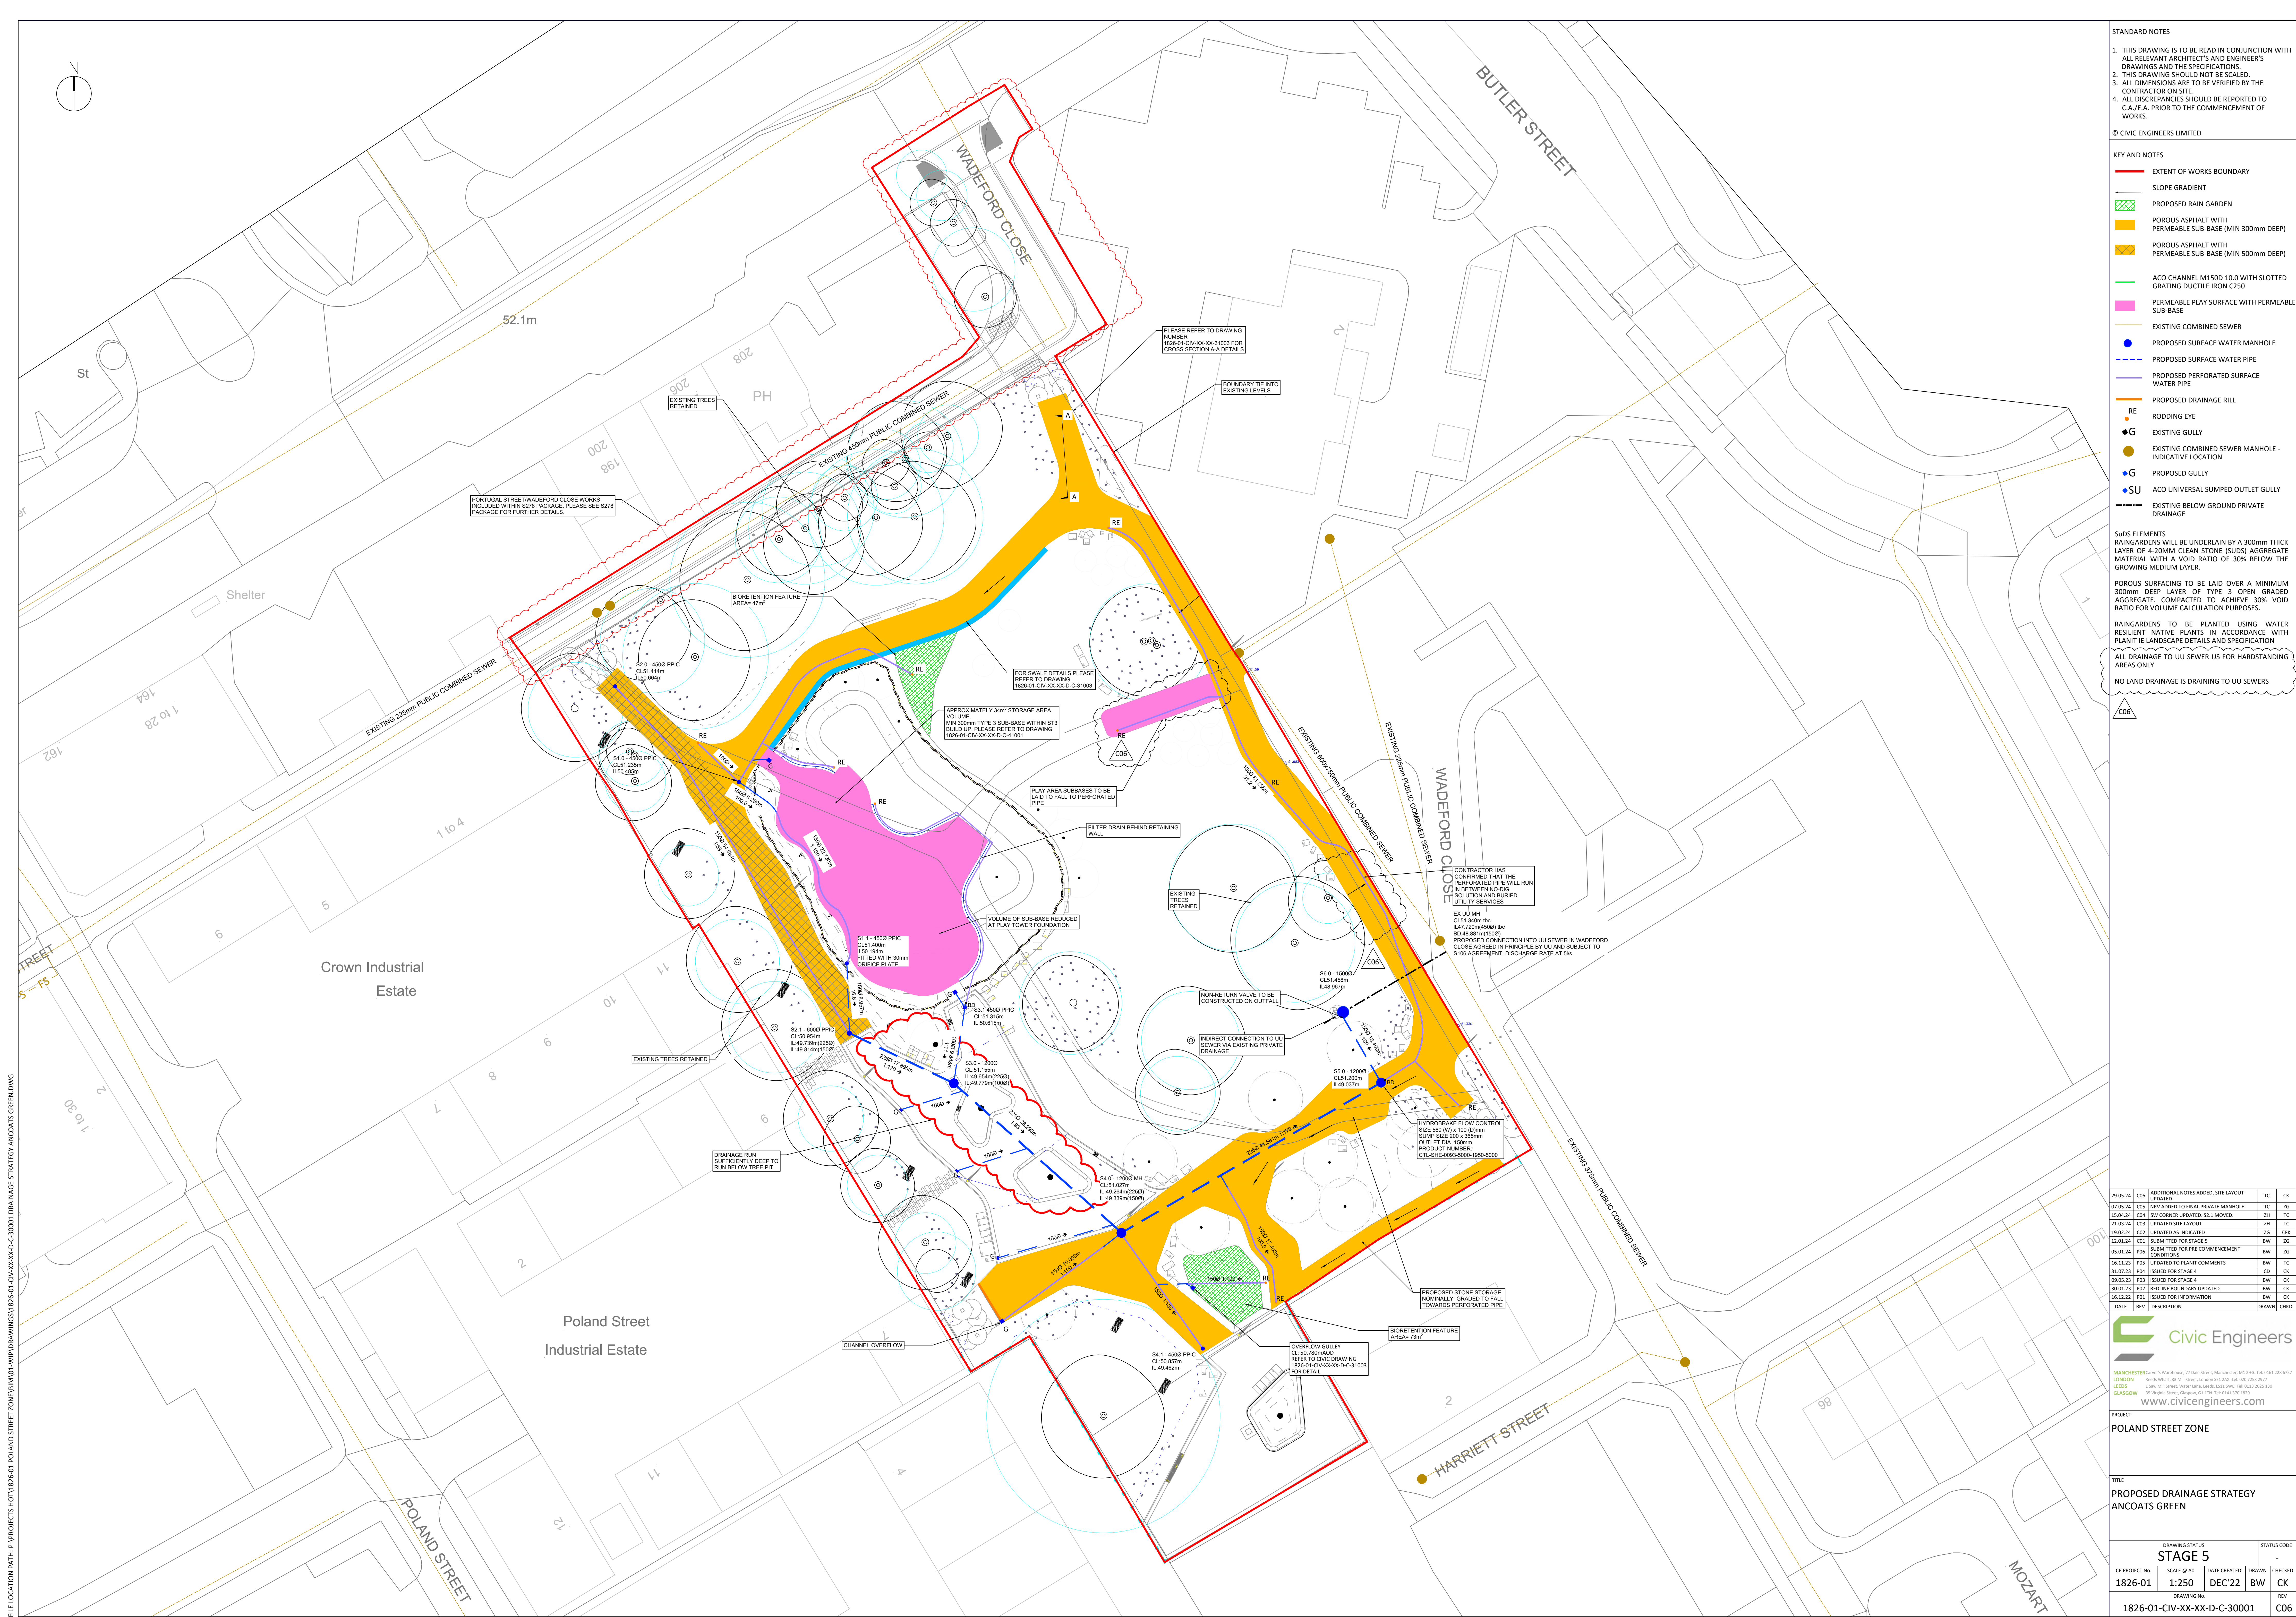

- STANDARD NOTES
1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS AND ENGINEER'S DRAWINGS AND THE SPECIFICATIONS.
  2. THIS DRAWING SHOULD NOT BE SCALED.
  3. ALL DIMENSIONS ARE TO BE VERIFIED BY THE CONTRACTOR ON SITE.
  4. ALL DISCREPANCIES SHOULD BE REPORTED TO C.A./E.A. PRIOR TO THE COMMENCEMENT OF WORKS.

© CIVIC ENGINEERS LIMITED

KEY AND NOTES

- EXTENT OF WORKS BOUNDARY
- SLOPE GRADIENT
- PROPOSED RAIN GARDEN
- POROUS ASPHALT WITH PERMEABLE SUB-BASE (MIN 300mm DEEP)
- POROUS ASPHALT WITH PERMEABLE SUB-BASE (MIN 500mm DEEP)
- ACO CHANNEL M1500 10.0 WITH SLOTTED GRATING DUCTILE IRON C250
- PERMEABLE PLAY SURFACE WITH PERMEABLE SUB-BASE
- EXISTING COMBINED SEWER
- PROPOSED SURFACE WATER MANHOLE
- PROPOSED SURFACE WATER PIPE
- PROPOSED PERFORATED SURFACE WATER PIPE
- PROPOSED DRAINAGE RILL
- RODDING EYE
- EXISTING GULLY
- EXISTING COMBINED SEWER MANHOLE - INDICATIVE LOCATION
- PROPOSED GULLY
- ACO UNIVERSAL SUMPED OUTLET GULLY
- EXISTING BELOW GROUND PRIVATE DRAINAGE

SUDS ELEMENTS  
RAINGARDENS WILL BE UNDERLAIN BY A 300mm THICK LAYER OF 4-20MM CLEAN STONE (SUDS) AGGREGATE MATERIAL WITH A VOID RATIO OF 30% BELOW THE GROWING MEDIUM LAYER.

POROUS SURFACING TO BE LAID OVER A MINIMUM 300mm DEEP LAYER OF TYPE 3 OPEN GRADED AGGREGATE. COMPACTED TO ACHIEVE 30% VOID RATIO FOR VOLUME CALCULATION PURPOSES.

RAINGARDENS TO BE PLANTED USING WATER RESILIENT NATIVE PLANTS IN ACCORDANCE WITH PLANTIE LANDSCAPE DETAILS AND SPECIFICATION

ALL DRAINAGE TO UU SEWER US FOR HARDSTANDING AREAS ONLY

NO LAND DRAINAGE IS DRAINING TO UU SEWERS

C06

|          |     |                                     |       |      |
|----------|-----|-------------------------------------|-------|------|
| 20.05.24 | C06 | ADDITIONAL NOTES ADDED, SITE LAYOUT | TC    | CK   |
| 07.05.24 | C05 | REV ADDED TO FINAL PRIVATE MANHOLE  | TC    | 26   |
| 15.04.24 | C04 | REV CORNER UPDATED, S2.1 MOVED      | 2H    | TC   |
| 21.03.24 | C03 | UPDATED SITE LAYOUT                 | 2H    | TC   |
| 10.02.24 | C02 | UPDATED AS INDICATED                | 2G    | CK   |
| 12.06.24 | C01 | SUBMITTED FOR STAGE 5               | BW    | 26   |
| 06.01.24 | P06 | SUBMITTED FOR PRE COMMENCEMENT      | BW    | 26   |
| 16.11.23 | P05 | UPDATED TO PLANT COMMENTS           | BW    | TC   |
| 31.07.23 | P04 | ISSUED FOR STAGE 4                  | CD    | CK   |
| 09.05.23 | P03 | ISSUED FOR STAGE 4                  | BW    | CK   |
| 05.02.23 | P02 | REVISED BOUNDARY UPDATED            | BW    | CK   |
| 16.12.22 | P01 | ISSUED FOR INFORMATION              | BW    | CK   |
| DATE     | REV | DESCRIPTION                         | DRAWN | CHKD |

**Civic Engineers**

MANCHESTER: Corner's Warehouse, 77 Dale Street, Manchester, M1 2HS. Tel: 0161 238 8701

LONDON: Rens Wharf, 35 Ald Street, London E1 2AA. Tel: 020 7553 2877

GLASGOW: 1500 West Street, Glasgow, G4 7LJ. Tel: 0141 2025 1100

GLASGOW: 25 Glasgow Street, Glasgow G1 1TH. Tel: 0141 202 1100

www.civicingengineers.com

PROJECT  
POLAND STREET ZONE

TITLE  
PROPOSED DRAINAGE STRATEGY  
ANCOATS GREEN

|                             |            |              |       |             |     |
|-----------------------------|------------|--------------|-------|-------------|-----|
| DRAWING STATUS              |            |              |       | STATUS CODE |     |
| STAGE 5                     |            |              |       | -           |     |
| CE PROJECT NO.              | SCALE @ A0 | DATE CREATED | DRAWN | CHECKED     |     |
| 1826-01                     | 1:250      | DEC'22       | BW    | CK          |     |
| DRAWING NO.                 |            |              |       |             | REV |
| 1826-01-CIV-XX-XX-D-C-30001 |            |              |       |             | C06 |