

**ARBORICULTURAL IMPACT ASSESSMENT
to BS 5837:2012
at
Land at Bailey Street/Enterprise Way
Manchester
Greater Manchester
M90 4AB**

Client:
KPP Architects Ltd

Client Address:
Lodge house
12 Town Street
Horsforth
Leeds
West Yorkshire
LS18 4RJ

Client Telephone:
0113 2390460

JCA Ref:
21843-A/AJB

Contents

1. Introduction.....	3
1.1 Purpose of the Report.....	3
1.2 Terms of Reference	3
1.3 Scope of the Report.....	3
1.4 Survey Details.....	3
2. Tree Descriptions and Recommendations.....	3
3. Arboricultural Implications Assessment (AIA)	4
3.1 Proposed Development.....	4
3.2 Tree Removals for Development.....	4
3.3 Pruning for Development	4
3.4 Temporary Protection Measures	4
3.5 Implications for Retained Trees.....	5
4. Summary	7
Appendix 1: Tree Descriptions and Recommendations.....	9
Appendix 2: Explanation of Tree Descriptions.....	10
Appendix 3: General Guidelines	12
Appendix 4: Author Qualifications	13
Appendix 5: Tree Constraints Plan.....	14
Appendix 6: Arboricultural Implications Plan.....	15

1. Introduction

1.1 Purpose of the Report

- 1.1.1 This Arboricultural Impact Assessment has been prepared for the proposed development at **Land at Bailey Street/Enterprise Way, Manchester**.
- 1.1.2 The purpose of this report is to assess the impact of the proposed development on the existing tree stock and outline mitigation actions, where appropriate, to minimise any potential damage to retained trees.

1.2 Terms of Reference

- 1.2.1 JCA Limited has been instructed by **KPP Architects Ltd** to prepare an Arboricultural Impact Assessment, based on our Arboricultural Report dated 29th May 2024 (JCA Ref: **21843/AJB**). The arboricultural survey and report conform to the most recent specifications outlined in BS 5837: 2012 Trees in relation to design, demolition and construction - Recommendations.
- 1.2.2 We have been supplied with a plan which details the proposed development. The tree data has been overlaid onto the proposed designs to create the Arboricultural Implications Plan, which can be found at **Appendix 6**. This provides the basis for which this Arboricultural Impact Assessment has been prepared.

1.3 Scope of the Report

- 1.3.1 This report is compiled in accordance with *BS 5837:2012 'Trees in relation to design, demolition and construction – Recommendations'* and is based on an objective assessment of the existing vegetation.
- 1.3.2 The specific design of the proposed development has been considered within the Arboricultural Implication Assessment in **Section 3** and is detailed on the Arboricultural Implications Plan at **Appendix 6**.

1.4 Survey Details

- 1.4.1 The original tree survey took place during March 2024 and was conducted by **Andrew Bussey** *LANTRA Accredited PTI*.

2. Tree Descriptions and Recommendations

- 2.1 The tree information recorded during the original survey is detailed in the tables at **Appendix 1**. A full explanation of the tables can be found at **Appendix 2**. Please refer also to the Tree Constraints Plan at **Appendix 5** for tree locations.

3. Arboricultural Implications Assessment (AIA)

3.1 Proposed Development

- 3.1.1 The development will consist of the development of a new 154-bedroom hotel, with inclusive restaurant and bar. New access will be created from both Enterprise Way and Bailey Lane for customer and service access segregation, with a new car park for 130 cars.
- 3.1.2 Any tree works required to accommodate the proposals are detailed in *italics* in the recommendation columns of the tables at **Appendix 1**.

3.2 Tree Removals for Development

- 3.2.1 In order to accommodate the proposed development, it will be necessary to remove the area of **G1** which is shown in red on the plan at **Appendix 6**. The number of trees to be removed within this retention category 'C' group cannot be quantified due to the lack of topographical information.
- 3.2.2 The removal of trees for development can often be mitigated (either partially or entirely) by the planting of suitable specimens within a landscaping scheme. Whilst not always necessary, the planting of trees can improve the aesthetic value of the surrounding area and may be conditioned in the usual manner.

3.3 Pruning for Development

- 3.3.1 No pruning works are required to accommodate the proposed development.

3.4 Temporary Protection Measures

3.4.1 The Protective Barrier

- 3.4.1.1 In order to ensure the effective protection of retained trees during development, protective fencing will be installed in accordance with BS5837: 2012. This will be the first job on site following the tree removals. The fencing should ideally be positioned to protect the entire **Root Protection Area (RPA)** of the retained trees, in order to create a **Construction Exclusion Zone (CEZ)**.

3.5 Implications for Retained Trees

3.5.1 Works within the RPA

- 3.5.1.1 To the knowledge of JCA, no construction activities are required within the root protection areas of retained trees.

3.5.2 Demolition

- 3.5.2.1 To the knowledge of JCA, no significant demolition activities are required adjacent to retained trees and as such, no mitigation measures are considered necessary.

3.5.3 Access/Construction of Hard Surfacing

- 3.5.3.1 In this case, the proposed development does not require the construction of access roads, driveways or other hard surfaces within the RPA of retained trees. As such no specialised construction techniques/surface treatments will be required for this purpose.

3.5.4 Building Construction / Foundation Design

- 3.5.4.1 The footprint of the proposed hotel does not incur the RPA of retained trees. As such no specialist construction or foundation methods are considered necessary for the sole purpose of preventing damage to trees.

3.5.5 Utilities

- 3.5.5.1 Details on service routes have not been provided to JCA at this time. Where utilities need to be brought onto the site, these should be routed away from the RPAs of retained trees. Where this is not possible, methodologies on the installation of underground services without damage to tree roots should be considered.
- 3.5.5.2 All service providers should be consulted prior to commencement of works with the aim of minimising the number of service runs on the site. Any foreseeable incursions to RPAs should be communicated to the appointed arboricultural consultant and the LPA at the earliest possible time to prevent breach of planning conditions and damage to retained trees.

3.5.6 Site Compound

- 3.5.6.1 The site compound, which typically includes the site office, mess facilities, toilets, storage of materials and parking, must be located away from all of the trees and outside their RPAs. Care should also be taken to prevent soil contamination from chemical spillages, including petrol, diesel and oils.

3.5.7 **Landscaping**

- 3.5.7.1 Proposed fence lines may be constructed within the RPA of a tree if necessary, providing that appropriate considerations are taken with regards to the well-being of the effected tree. As such, no continual trenching is to be undertaken within the RPA (e.g. for small walls onto which panel fencing is installed). Excavations must be kept to a minimum and therefore only fence designs requiring intermittent posts will be acceptable within the RPA. Fences should also be kept as far away from the main stems of the trees as is reasonably possible.
- 3.5.7.2 No ground level changes are to be undertaken within the RPAs of retained trees, unless otherwise stated or agreed with the appointed Arboricultural Consultant or the LPA. The requirement to raise/lower ground levels within RPAs must be communicated to these parties at the earliest practical convenience.

4. Summary

- 4.1 We are informed that no trees within our survey are subject to any Tree Preservation Orders (TPO) and the site is not located within a Conservation Area.
- 4.2 The development will consist of the development of a new 154-bedroom hotel, with inclusive restaurant and bar. New access will be created from both Enterprise Way and Bailey Lane for customer and service access segregation, with a new car park for 130 cars.
- 4.3 The arboricultural implications of the development have been considered and are discussed in **Section 3**.
- 4.4 An area of trees within **G1** require removal in order to facilitate the proposed development. Tree works required to accommodate the proposals are detailed in *italics* in the tables at **Appendix 1**. Those trees requiring removal are shown in red on the Arboricultural Implications Plan at **Appendix 6**, where the proposals can also be viewed.
- 4.5 All development work carried out in close proximity to trees should be done so in a manner sympathetic to their needs. Otherwise the condition of the trees may deteriorate in the months and years following the development, leading to a loss of amenity and potentially hazardous trees.
- 4.6 The protection of retained trees can be achieved by the creation of a Construction Exclusion Zone based on the Root Protection Area of a tree. The Root Protection Area of each tree or group is marked on the Tree Constraints Plan at **Appendix 5**.
- 4.7 The proposed development should be accompanied by an Arboricultural Method Statement (AMS) detailing the specific protection measures necessary for each tree. This should specify the required fencing standard and positions (the creation of the Construction Exclusion Zone), acceptable construction techniques and necessary tree works.
- 4.8 Upon instruction JCA are able to provide a comprehensive Arboricultural Method Statement in order to ensure the continued health of trees throughout the proposed development. We are also able to provide tree planting schemes and organise tree works.
- 4.9 The data gained during the original survey provides an indication of the health of the trees. However, it does not enable a comprehensive assessment of their condition over time. Trees are living organisms which are affected by many factors including weather conditions, diseases/disorders, light levels and human activities. Due to this, the report is only valid for a period of 1 year from the date of issuing. Should an update or revision of this report be required outside of this time period, JCA may require a further site visit to ensure that the condition of the trees has not significantly changed. It is advised that the trees are inspected regularly, in the interests of risk management.

Appendices

Tree Ref.	Age Common Name <i>Botanical Name</i>	Height (m)	Crown Height (m)	Height (m) and Direction of the Lowest Branch	Diameter (cm)	Crown Spread N W E S	Observations	Recommendations Priority	Physiological Condition	Structural Condition	Amenity Value	NHBC Water Demand	Life Expectancy (yrs)	Retention Category
G 1	Young to semi-mature Mixed species <i>Details in observations</i>	To 13#	0+	0+	To 25#	See plan	A dense plantation comprised of Wild Cherry, Scots Pine, Field Maple, Downy Birch, Lime, Elder, Common Ash, Plum and Goat Willow. Not fully inspected due to limited access and the density of the vegetation.	No action required. <i>Remove the area shown in red on the plan at Appendix 6 to facilitate the proposed development.</i> n/a	GOOD	GOOD	MOD	LOW TO HIGH	40+	1 B 2
T 2	Mature English Oak <i>Quercus robur</i>	19	2	4 n/a	98#	7# 7 6# 5	Twin-stemmed at 4m with a balanced crown. No evidence of significant pruning. Decay cavities with decay and moderate deadwood noted. Not fully inspected due to the adjacent watercourse and Ivy to the stem.	Monitor biennially. Low	GOOD	FAIR	MOD	HIGH	40+	A 1
T 3	Mature Common Ash <i>Fraxinus excelsior</i>	16	4	5 n/a	46#	5# 5 5# 4#	Single-stemmed and vertical with a balanced crown. Moderate Ash Dieback noted. Not fully inspected due to the adjacent watercourse.	Monitor biennially. Low	FAIR	FAIR	MOD	MOD	10+	C 1
T 4	Early-mature Whitebeam <i>Sorbus aria</i>	11	4	3 n/a	32	3.5 3 3 2.5	Twin-stemmed at 2m with a balanced crown. Occasional pruning wounds. No major visible defects.	No action required. n/a	GOOD	GOOD	MOD	MOD	40+	B 1

Appendix 2: Explanation of Tree Descriptions

A2.1 Measurements/ Reference Information

- A2.1.1 *REF NUMBER*. All items surveyed are allocated a reference number preceded with a letter, identifying the type of vegetation surveyed: T = an individual tree, G = a group of trees or an area of vegetation, W = woodland, H = a hedgerow.
- A2.1.2 *SPECIES: COMMON AND BOTANICAL NAME*. The common and botanical names of the species present are noted. If the species is not clear or identifiable, then a general common name and genus will be noted.
- A2.1.3 *AGE CLASS* of the tree is described as young, semi-mature, early-mature, mature, over-mature, veteran or dead.
- A2.1.4 *HEIGHT* of the tree is measured in metres from the stem base to the top of the crown.
- A2.1.5 *CROWN HEIGHT* is an indication of the height above ground level at which the crown begins.
- A2.1.6 *STEM DIAMETER* is measured at 1.5 metres above (higher) ground level. Where the tree is multi-stemmed at this point; diameter measurements are taken for each stem. If more than five stems are present, an average stem diameter is taken. If for whatever reason it is not practical to measure multiple-stemmed trees in this way, the diameter is measured close to ground level, just above the root buttress.
- A2.1.7 *CROWN SPREAD* is measured from the centre of the stem base to the tips of the branches to all four cardinal points.
- A2.1.8 *HEIGHT AND DIRECTION OF LOWEST BRANCH*. The height and direction of the lowest significant branch is noted because of potential issues relating to clearances and the need for tree pruning.
- A2.1.9 *NHBC WATER DEMAND*. The water demand of each tree is listed in accordance with current NHBC Standards. This is included to aid structural engineers, architects and other members of the design team as it determines foundation depth and other considerations with regard to trees.

A2.2 Evaluations

A2.2.1 *PHYSIOLOGICAL CONDITION* is classed as good, fair, poor, or dead. This is an indication of the health and vitality of the tree and takes into account vigour, presence of disease and dieback.

A2.2.2 *STRUCTURAL CONDITION* is classed as good, fair or poor. This is an indication of the structural integrity of the tree and takes into account significant wounds, decay and quality of branch junctions.

A2.2.3 *LIFE EXPECTANCY* is classed as; 0, less than 10 years, 10+ years, 20+ years, or 40 + years. This is an indication of the minimum number of years before removal of the tree is likely to be required.

A2.2.4 *AMENITY VALUE*. A general indication is given in respect to the amenity/landscape value of the tree/group within the surrounding area.

A2.2.5 *PRIORITIES*. A priority rating is given concerning the time periods in which the recommended works should be undertaken. LOW priority works should be undertaken within 12 months of the survey, MOD (moderate) priority works should be undertaken within 6 months and HIGH priority works should be completed as soon as practically possible. If no works are recommended, N/A (not applicable) will be used.

A2.3 Retention Categories

A2.3.1 *A (marked green on the Tree Constraints Plan) = Trees of high quality.*

These trees are of high quality and value with a good life expectancy (usually with an estimated remaining life expectancy of 40 years).

A2.3.2 *B (marked in blue on the Tree Constraints Plan) = Trees of moderate quality.*

These trees are of moderate quality and value with a reasonable life expectancy (usually with an estimated life expectancy of at least 20 years).

A2.3.3 *C (marked in grey on the Tree Constraints Plan) = Trees of low quality.*

These trees are of low quality and value but which are in adequate condition to remain or are young trees with a stem diameter below 15cm (usually with an estimated life expectancy of at least 10 years).

A2.3.4 Trees categorised as retention category 'A', 'B' or 'C' are then justified by being further divided into 3 subcategories:

1 = Mainly arboricultural qualities.

2 = Mainly landscape qualities.

3 = Mainly cultural values, including conservation value.

Appendix 3: General Guidelines

- A3.1 All tree work should be undertaken to BS 3998: 2010 '*Recommendations for tree work*' or other recognised industry practice.
- A3.2 Staff carrying out the work must be qualified, experienced and ideally be Arboricultural Association approved contractors. They should be covered by adequate public liability insurance.
- A3.3 This report is based upon a visual inspection. The consultant shall not be responsible for events which happen after this time due to factors which were not apparent at the time, and the acceptance of this report constitutes an agreement with the guidelines and the terms listed therein.
- A3.4 Any defects seen by a contractor or the employer that were not apparent to the consultant must be brought to the consultant's attention immediately.
- A3.5 No liability can be accepted by JCA in respect of the trees unless the recommendations of this report are carried out under the supervision of JCA and within JCA's timescale.
- A3.6 It is advisable to have trees inspected by an arboricultural consultant on a regular basis.

Appendix 4: Author Qualifications

Principal Consultant and Managing Director

Jonathan Cocking *F.R.E.S., Tech. Cert. (Arbor.A), PDipArb (RFS) FARborA CBiol MSB. MICFor.* Jonathan is a Registered Consultant and Fellow of the Arboricultural Association and sits on its Professional Committee. He has 31 years' experience in the Arboricultural profession and served for eight years as Senior Arboriculturist with a large local authority before establishing JCA in 1997. Jonathan has since developed JCA's portfolio of services and its extensive client base. He is a Chartered Biologist, a Chartered Arboriculturalist and an Expert Witness with much experience of litigation work.

Technical Director

Toby Thwaites *BSc (Hons), HND (Arboriculture), MARborA.* Toby joined JCA in 1998 after graduating in Ecology at the University of Huddersfield and has since graduated in Arboriculture at the University of Central Lancashire. A former JCA team leader and Consulting Arboriculturist, Toby is now Technical Director and oversees all office and on-site activities at JCA and is on hand to offer technical support and advice.

Operations Director

Charles Cocking *FdSc (Arboriculture), MARborA.* Charles joined JCA in January 2014 having previously worked for the company on a part time basis during 2013. Charles obtained his Foundation Degree in Arboriculture at Askham Bryan College, York, and is a Professional Member of the Arboricultural Association. Charles now oversees all internal operations for the company.

Consulting Staff: Arboriculture

Andrew Bussey. Andrew started working in consultancy at JCA in 2006 having spent 12 years working as an arborist for various private companies before joining a Local Authority forestry team. He has various NPTC qualifications, is QTRA qualified and is a LANTRA Accredited Professional Tree Inspector.

Emily Wilde *FdSc (Arboriculture).* Emily joined JCA having previously worked for various private tree surgery and consultancy companies over the past 8 years. She initially obtained a ND in Forestry & Arboriculture, followed by a FdSc in Arboriculture at Askham Bryan College, York. Emily has various NPTC certificates and is QTRA qualified.

Mick Eltringham *ND (Forestry).* Mick joined JCA after spending 12 years working in the industry for various private companies in the north and south of England. He has also spent the last five years working as a consultant for two canopy research projects in the Amazon Rainforest, working with Oxford University and the University of Arizona. He has various NPTC Qualifications.

Dan Kemp *FdSc (Arboriculture), BTEC National Diploma(Arboriculture), National Certificate In Horticulture, City & Guilds In Horticulture.* Dan joined JCA in February 2019 with nearly 30 years' experience in arboriculture with extensive Botanical and Mycological expertise. He worked as a London Tree Officer for 12 years and in several arboricultural and horticultural management posts, specialising particularly in tree risk assessments and tree related subsidence.


Luke Wickham *FdSc (Arboriculture and Urban Forestry), TechArborA.* Luke joined JCA in 2021 after obtaining his Foundation Degree in Arboriculture and Urban Forestry at Askham Bryan College. Having previously worked within the industry for the past 4 years, running his own small business and sub-contracting for local firms, Luke brings a sound knowledge and understanding of the practical and academic sides of the industry.

David de Peña *BSc (Hons) Ecology and Conservation.* After earning his degree from Manchester Metropolitan University, David worked as an ecologist at various consultancies, contributing to a wide range of projects, including major infrastructure projects across the UK. More recently, David transitioned to arboriculture and served as a surveyor for Manchester City of Trees, where he participated in a project to quantify the value of Greater Manchester's woodlands and trees.

Administrative Staff

Catherine Cocking Accounts Manager.
Kelly Saunders Accounts Assistant.

Lorraine Spink Administrative Assistant.
Adie Gray I.T. Officer.



Root Protection Area: RPA

THE ROOT PROTECTION AREA SHOULD IDEALLY REMAIN UNDISTURBED IF THE TREE IS TO BE RETAINED.

THE DEVELOPMENT PROPOSALS SHOULD THEREFORE BE DESIGNED TO AVOID THE RPA OF ANY TREE WHICH IS TO BE RETAINED.

IF IT IS NECESSARY FOR THE DEVELOPMENT TO ENCROACH INTO THE RPA OF A TREE WHICH IS TO BE RETAINED THEN SPECIALIST CONSTRUCTION TECHNIQUES AND MATERIALS MUST BE CONSIDERED.



THIS PLAN IS TO BE PRINTED IN COLOUR AND READ IN CONJUNCTION WITH THE JCA ARBORICULTURAL REPORT (JCA REF: 21843-A/AJB)

Appendix 5:
Tree Constraints Plan

ADDRESS: Land at Bailey Street/Enterprise Way
Manchester, Greater Manchester, M90 4AB.
JCA REF: 21843-A/AJB

SCALE : 1:500

PAPER SIZE : A2

SURVEYED BY: AJB

DRAWN BY: AJB



APPROVED BY: ME

BRITISH STANDARD 5837:2012: 4.5
RETENTION CATEGORIES

Detailed definitions of these categories are at Appendix 2 of our report. N.B. These categories do not necessarily represent or correspond to recommendations for action made in this report.

	CATEGORY A: 'RETENTION MOST DESIRABLE'
	CATEGORY B: 'RETENTION DESIRABLE'
	CATEGORY C: 'TREE WHICH COULD BE RETAINED'
	CATEGORY U: 'TREE FOR REMOVAL'
	STEM OF TREE TO BE RETAINED
	STEM OF TREE TO BE REMOVED
	ROOT PROTECTION AREA
	ROOT PROTECTION AREA (PRIOR TO OFF-SETTING)

Arboricultural & Ecological Consultants

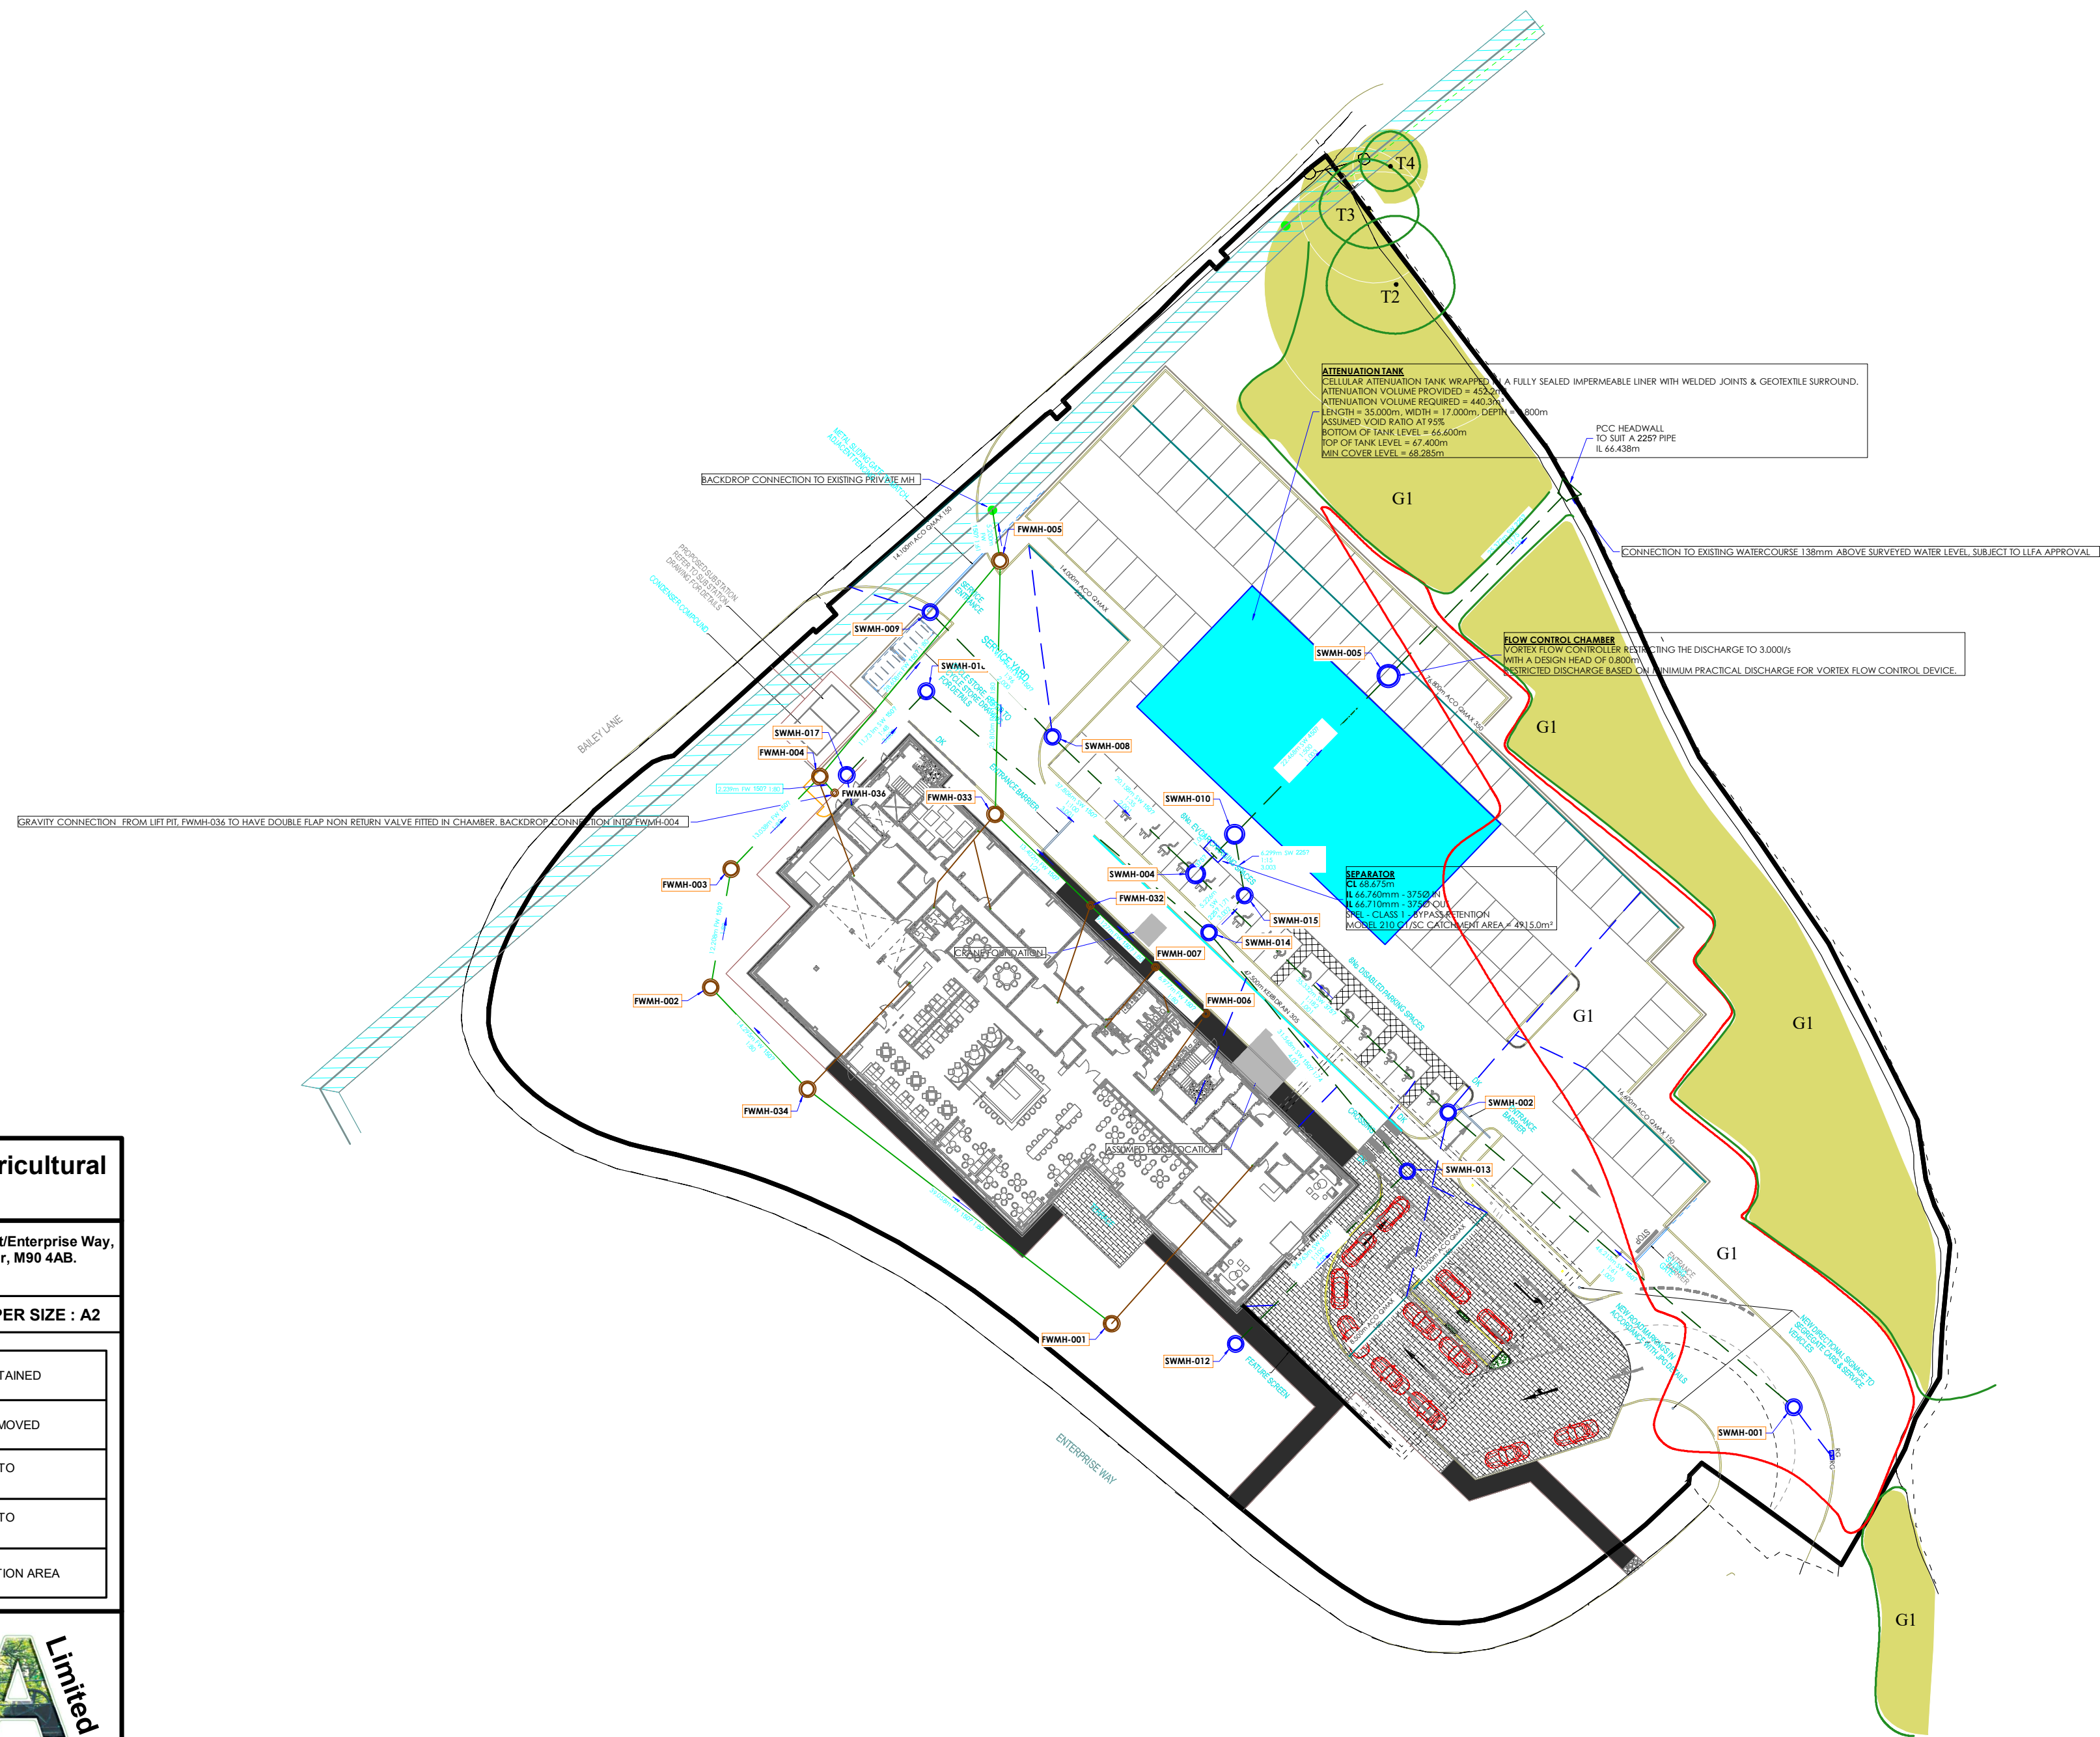

Appendix 6: Arboricultural Implications Plan

ADDRESS: Land at Bailey Street/Enterprise Way, Manchester, Greater Manchester, M90 4AB.
JCA REF: 21843-A/AJB

SCALE : 1:500

PAPER SIZE : A2

	TREE TO BE RETAINED
	TREE TO BE REMOVED
	STEM OF TREE TO BE RETAINED
	STEM OF TREE TO BE REMOVED
	ROOT PROTECTION AREA

Arboricultural & Ecological Consultants

THIS PLAN IS TO BE PRINTED IN COLOUR AND READ IN CONJUNCTION WITH THE JCA ARBORICULTURAL REPORT (JCA REF: 21843-A/AJB)

I hope that this report provides all the necessary information, but should any further advice be needed please do not hesitate to contact the author.

Signed



.....

Andrew Bussey *LANTRA Accredited PTI.*

29th May 2024

For and on behalf of **JCA Ltd**

Registered Office

**Unit 80
Bowers Mill
Branch Road
Barkisland
Halifax
HX4 0AD**

**Tel: 01422 376335
Fax: 01422 376232
Email: info@jcaac.com**

www.jcaac.com

JCA Ltd. Arboricultural and Ecological Consultants

Professional Tree and Ecology Advice nationwide

ARBORICULTURAL SERVICES

Guidance for Architects and Developers

- British Standard 5837 Tree Surveys
- Arboricultural Implication Assessments (AIA)
- Arboricultural Method Statements (AMS)

Tree Advice for the Legal Profession

- Subsidence Litigation
- Personal Injury and Accident Investigation
- Expert Witness, Planning Inquiries and Appeals

Advice for Engineers, Loss Adjusters and Insurers

- Tree Surveys for Subsidence
- Heave Assessment
- Tree Root Identification

Veteran Tree Management

- Ancient Woodland Management
- Veteran Tree Management

Advice for Local Authorities and Social Housing

- Tree Safety Surveys
- Specialist Decay Detection
- Landscape and Orchard Design

Tree Health and Pest and Disease Management

- Pest and Disease Surveys
- Tree Health Checks
- Disease Mitigation and Control

ECOLOGICAL SERVICES

Ecological Pre-Planning Services

- Phase 1 Habitat Surveys
- Great Crested Newt eDNA Sampling
- Protected Species: Bat, Wintering and Nesting Bird, Badger, Amphibian, Otter, Water Vole, White-Clawed Crayfish, Dormice and Reptile Surveys.
- Preparation for Environmental Impact Assessment (EIA)
- Invasive Species Surveys
- Code for Sustainable Homes

Ecological Post-Planning Services

- Biodiversity Enhancement Plans
- Protected Species Mitigation
- Ecological Management (Bat and Bird box installation and inspection)

HEAD QUARTERS:

Unit 80 Bowers Mill,
Branch Road,
Barkisland,
Halifax, HX4 0AD.

Tel: 01422 376335
Email: info@jcaac.com
Website: www.jcaac.com

