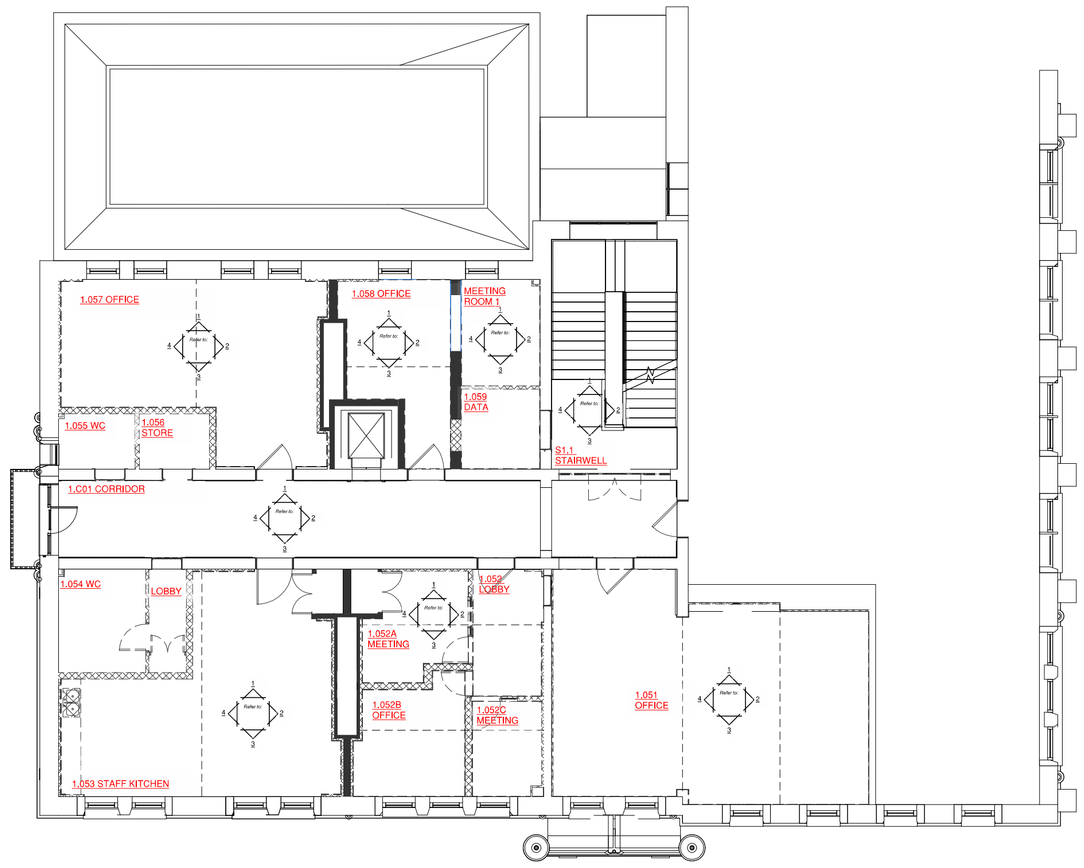






STRIP OUT SCHEDULE - ROOM 1.051 (OFFICE)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing Fire Alarm sounder and associated cabling and fixing carefully stripped out and removed Existing Fire Alarm Interface and associated cabling and fixing carefully stripped out and removed	
2	Existing surface mounted trunking and fixings carefully stripped out and removed Existing intruder alarm sensor carefully stripped out and removed	
3	Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
4	Existing surface mounted trunking and fixings carefully stripped out and removed Existing lighting control box at high level carefully stripped out and removed including assocaited conduits	




STRIP OUT SCHEDULE - ROOM 1.052 (LOBBY) / 1.052B (OFFICE) / 1.052C (OFFICE)

REFERENCE	DESCRIPTION	PHOTO
1.052	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing smoke detection and associated cabling and clips carefully stripped out and removed	
1.052B	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing lighting control box at high level carefully stripped out and removed including assocaited conduits	
1.052C	Existing surface mounted trunking and fixings carefully stripped out and removed Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	


STRIP OUT SCHEDULE - ROOM 1.058 (OFFICE) / MEETING ROOM 1 / 1.059 (DATA)

REFERENCE	DESCRIPTION	PHOTO
1.058	Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing FA sounder and associated cabling and clips carefully stripped out and removed Existing FA interface and associated cabling and clips carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing WiFi router and associated containment carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing wall mounted sensor carefully stripped out and removed	
MEETING ROOM 1	Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed	
1.059	NO ACCESS TO THIS ROOM - ALL EXISTING SERVICES CAREFULLY STRIPPED OUT AND REMOVED WITH EXCEPTION OF INCOMING COMMS CALBES WHICH ARE TO BE RETAINED AND REROUTED TO NEW COMMS ROOM LOCATION	NO ACCESS



STRIP OUT SCHEDULE - ROOM 1.052A (MEETING)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
RISER	RISER - Carefully strip out and remove: - sub mains/cables - containment/trunking/conduit - panels/DBs - switches/sockets/fittings - smoke detector	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing WiFi booster carefully stripped out and removed Existing Fire Alarm sounder and associated cabling and fixing carefully stripped out and removed	
2	No MEP strip out work	
3	No MEP strip out work	
4	Existing surface mounted trunking and fixings carefully stripped out and removed Existing socket outlets in boxed out section carefully stripped out and removed	




STRIP OUT SCHEDULE - ROOM 1.053 (STAFF KITCHEN)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit and conduit boxes carefully stripped out and removed Existing Fire Alarm sounder and associated cabling and fixing carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing ventilation grilles carefully stripped out and removed, including ductwork and plant in mezz plant area behind boxed out section	
2	Existing surface mounted trunking and fixings carefully stripped out and removed	
3	Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
4	Existing surface mounted conduit and conduit boxes carefully stripped out and removed Existing point of use water heater carefully stripped out and removed Existing domestic water pipework carefully stripped out and removed Existing above ground drainage pipework carefully stripped out and removed	


STRIP OUT SCHEDULE - ROOM 1.054 (WC) / WC LOBBY / 1.055 (WC) / 1.056 (STORE)

REFERENCE	DESCRIPTION	PHOTO
1.054	Existing lights and associated containment and fixings carefully stripped out and removed. Existing FA sounder and associated cabling and clips carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing surface mounted conduit and conduit boxes carefully stripped out and removed Existing domestic water pipework carefully stripped out and removed Existing above ground drainage pipework carefully stripped out and removed Existing ventilation grilles carefully stripped out and removed, including ductwork and plant in mezz plant area behind boxed out section	
WC LOBBY	Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing unvented hot water heater and associated equipment stripped out and removed (in utility cupboard) Existing surface mounted conduit and conduit boxes carefully stripped out and removed Existing domestic water pipework carefully stripped out and removed Existing above ground drainage pipework carefully stripped out and removed	
1.055	Existing lights and associated containment and fixings carefully stripped out and removed. Existing FA sounder and associated cabling and clips carefully stripped out and removed Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing surface mounted conduit and conduit boxes/fused spurs carefully stripped out and removed Existing domestic water pipework carefully stripped out and removed Existing above ground drainage pipework carefully stripped out and removed Existing ventilation grilles carefully stripped out and removed, including ductwork and plant in mezz plant area behind boxed out section	
1.056	Existing lights and associated containment and fixings carefully stripped out and removed. Existing surface mounted conduit carefully stripped out and removed Existing FA sounder and associated cabling and clips carefully stripped out and removed Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing heating pipework carefully stripped out and removed	


STRIP OUT SCHEDULE - ROOM 1.057 (OFFICE)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
2	Existing surface mounted trunking and fixings carefully stripped out and removed	
3	Existing surface mounted trunking and fixings carefully stripped out and removed Existing FA sounder and associated cabling and clips carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit carefully stripped out and removed Existing fused spur carefully stripped out and removed	
4	Existing surface mounted trunking and fixings carefully stripped out and removed	

STRIP OUT SCHEDULE - ROOM 1.01 (CORRIDOR)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing fused spur carefully stripped out and removed	
2	No MEP strip out work	
3	Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
4	No MEP strip out work	

STRIP OUT SCHEDULE - ROOM S1.1 (STAIRWELL)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	No MEP strip out work	
2	No MEP strip out work	
3	No MEP strip out work	
4	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing FA sounder carefully stripped out and removed Existing FA break glass carefully stripped out and removed	

P01	LISTED BUILDING CONSENT	JL	JF	RC	23.05.24
Rev	Amendment	By	Chk	App	Date

Status: S3 — Description: SUITABLE FOR REVIEW AND COMMENT — Stage: 4

Client: The University of Manchester

Project: UNIVERSITY OF MANCHESTER RUTHERFORD BUILDING

Drawing: MECHANICAL & ELECTRICAL SERVICES STRIP OUT DRAWING FIRST FLOOR

CAD21LTD BUILDING SERVICES & ENERGY CONSULTING ENGINEERS

NEWCASTLE ◘ TEESSIDE ◘ YORKSHIRE ◘ NORTH WEST

Drawing Number: UOMRB-CAD-XX-01-DR-ME-10001 — Revision: P01

Scale: 1/100 — Size: A1

Drawing Origins :