
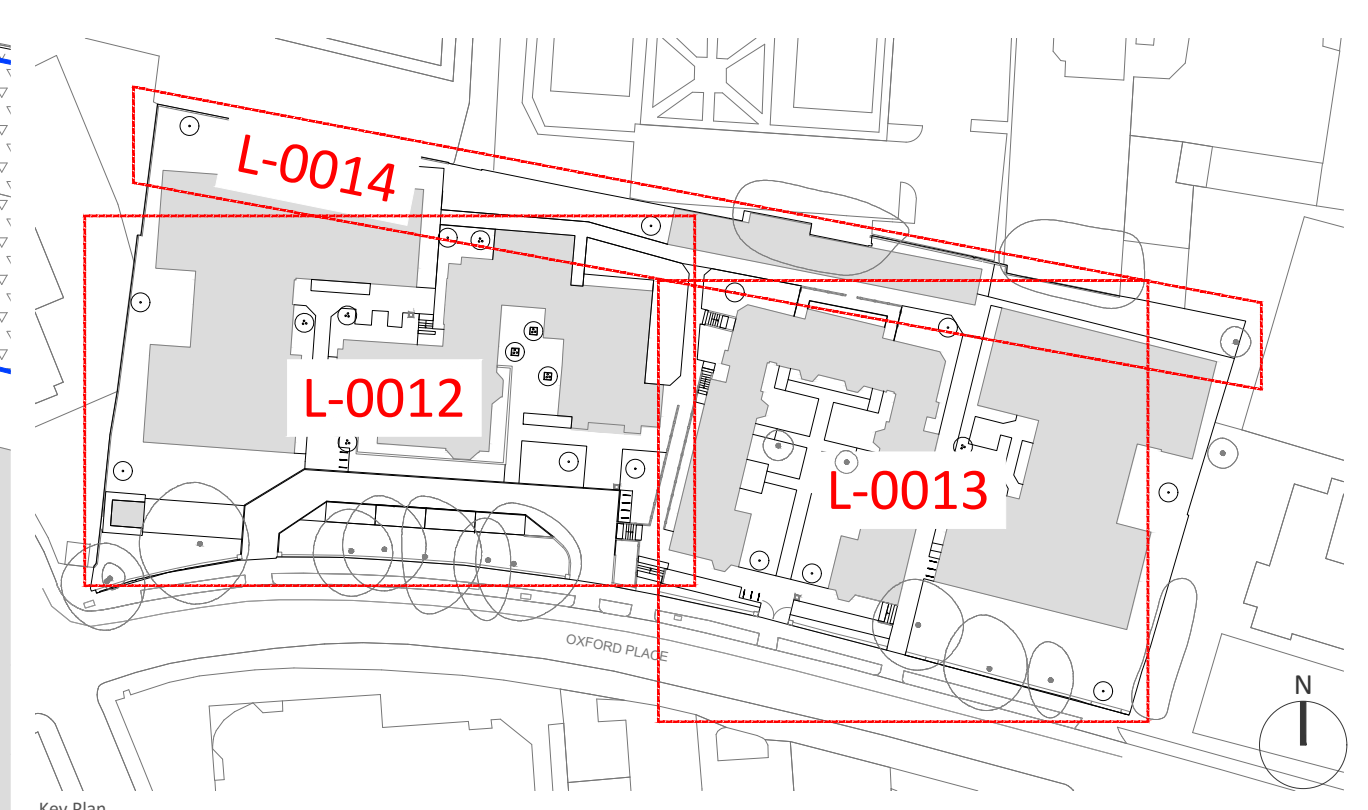


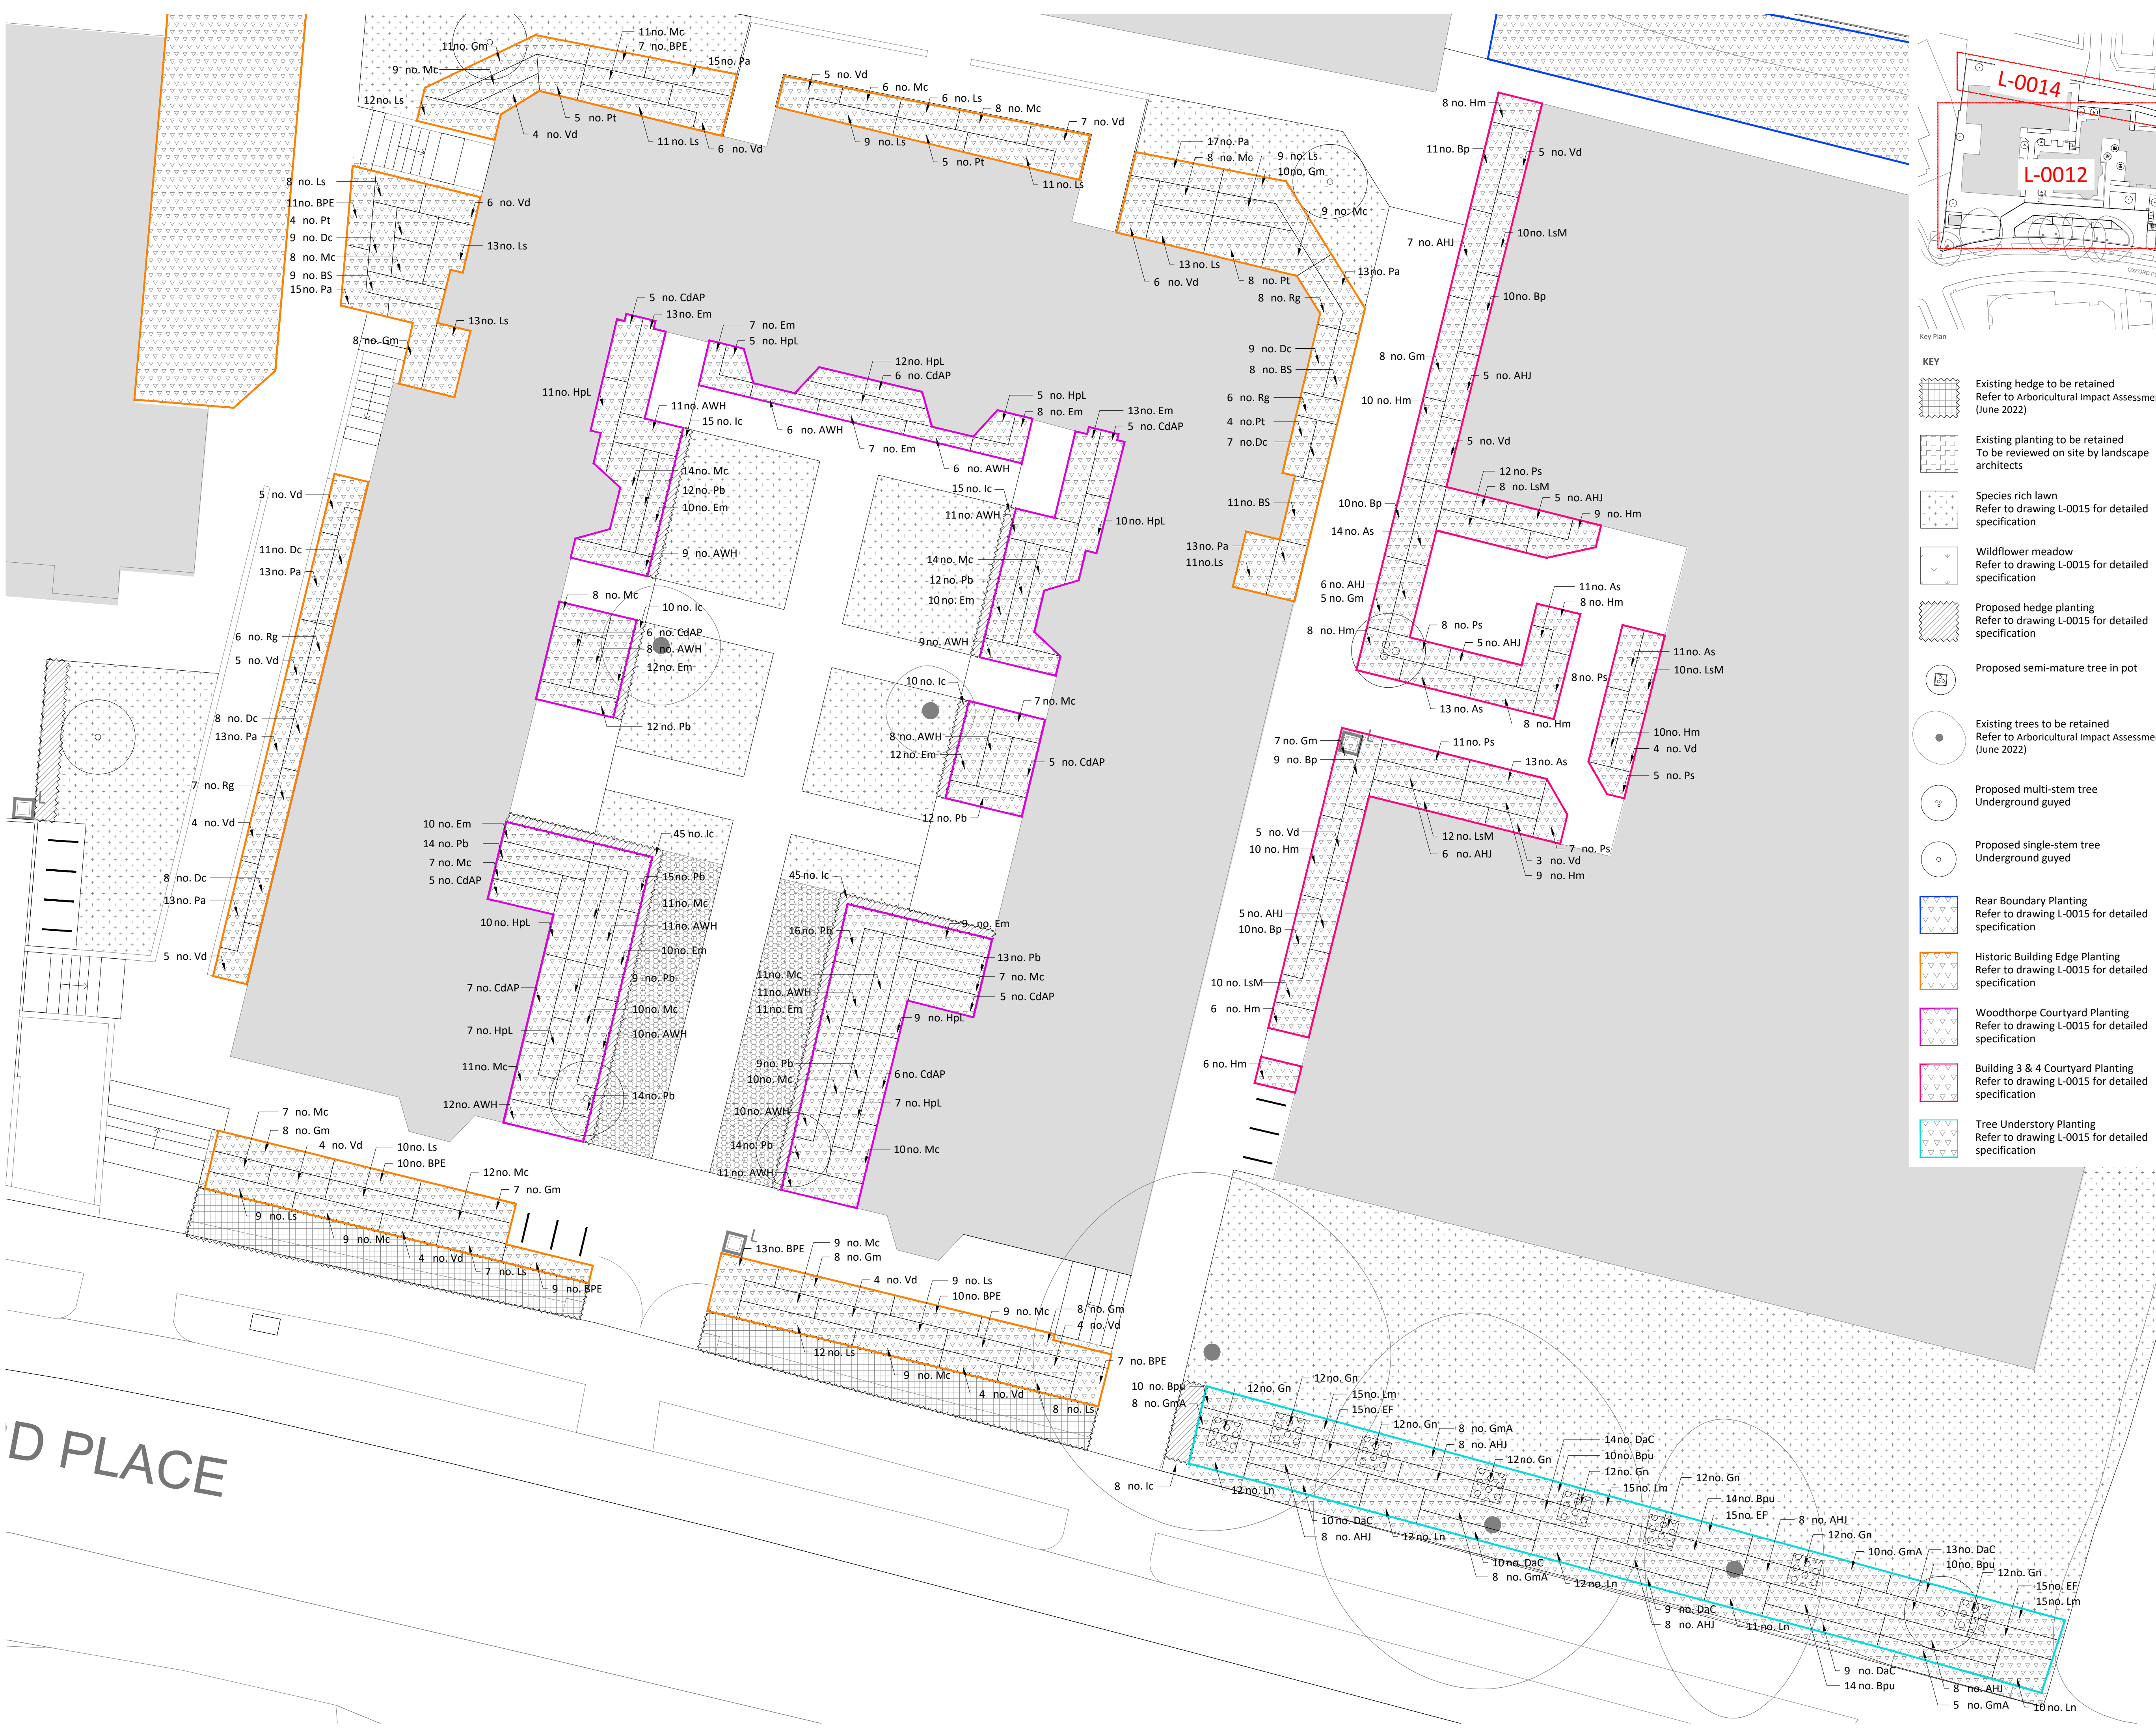

KEY

- Existing hedge to be retained
Refer to Arboricultural Impact Assessment (June 2022)
- Existing planting to be retained
To be reviewed on site by landscape architects
- Species rich lawn
Refer to drawing L-0015 for detailed specification
- Wildflower meadow
Refer to drawing L-0015 for detailed specification
- Proposed hedge planting
Refer to drawing L-0015 for detailed specification
- Proposed semi-mature tree in pot
- Existing trees to be retained
Refer to Arboricultural Impact Assessment (June 2022)
- Proposed multi-stem tree
Underground guyed
- Proposed single-stem tree
Underground guyed
- Rear Boundary Planting
Refer to drawing L-0015 for detailed specification
- Historic Building Edge Planting
Refer to drawing L-0015 for detailed specification
- Woodthorpe Courtyard Planting
Refer to drawing L-0015 for detailed specification
- Building 3 & 4 Courtyard Planting
Refer to drawing L-0015 for detailed specification
- Tree Understorey Planting
Refer to drawing L-0015 for detailed specification

Notes

- All dimensions in mm, unless otherwise stated.
- Scaling from drawing if printed incorrectly may lead to errors.
- All information outside red line boundary shown for contextual purpose only.
- This drawing is to be read in conjunction with landscape general arrangement, planting schedules, details and specification.
- Refer to 0919-RFM-XX-00-DR-L-0015 for planting schedules.
- Refer to arboricultural impact assessment for full details of tree retention and removals

Planting Notes

- Soft landscape contractor to undertake a briefing session with landscape architect prior to installation of planting on site.
- Planting to be installed in an evenly spaced staggered matrix, avoiding visible rows.
- All topsoil for the landscaping must be in accordance with the latest British Standards, BS 3882:2015.
- All subsoil to be in accordance with BS8601:2013.
- Tree pits to include 150mm depth of free draining gravel wrapped in geotextile membrane to base of pit.
- The base to all planting areas to be broken up / loosened and debris removed to promote good drainage.
- Container Grown Plants: To comply with the National Plant Specification. Shrubs shall be planted in pits min. 300 x 300 x 200mm depth. Roots are to be fully submerged beneath topsoil.
- Mulch: All Planting beds to receive 50mm ornamental mulch.
- Watering: Plant only into moist soil and water thoroughly to the full depth of soil immediately after planting.
- Wildflower meadows subject to seasonal mowing regime
- Any proposed plant substitution shall be agreed with the landscape architect prior to ordering.

D PLACE

Issued for discharge of planning condition

25.01.24 Issue For Stage 4
Date Description of revision JS TD MS P01
Drawn Checked Approved Revision

re-form
landscape architecture

W: re-formlandscape.com
E: info@re-formlandscape.com
T: Edinburgh +44 (0)131 354 1876
Leeds +44 (0)113 245 4695
Manchester +44 (0)161 397 4953

Project
ST GABRIEL'S
RF21-919

Client
MCLAREN PROPERTY

Document title
PLANTING PLAN 02

Paper size
A1

Status
PARTIALLY SIGNED OFF

Drawing number
0919-RFM-XX-00-DR-L-0013

© re-form landscape architecture

Scale
1:100

Revision
B4
P01