

Plant Schedule

Trees RB=Rootball x=times transplanted

Abbreviation	Species	Girth	Specification	Pot Size	Number of Plan
AmRH	Amelanchier arborea 'Robin Hill'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	7 -
PAm	Prunus 'Amanogawa'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	3 -
PSB	Prunus 'Sunset Boulevard'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	3 -
PvC	Pyrus calleryana 'Chanticleer'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	9 -
SOJR	Sorbus 'Joseph Rock'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	9 -
SaLu	Sorbus aria 'Lutescens'	14-16cm	Extra Heavy Standard: 3x :Height 4.25-6M :Clear Stem min. 200cm :Full crown	RB	5 -
ACST	Acer campestre 'Street Wise'	20-25cm	Semi Mature :Height min 5.0M :Clear Stem min. 200cm :Full crown	RB	12 -
BTPA	Betula pendula	20-25cm	Semi Mature :Height min 5.0M :Clear Stem min. 200cm :Full crown	RB	16 -
Pav	Prunus avium	20-25cm	Semi Mature :Height min 5.0M :Clear Stem min. 200cm :Full crown	RB	5 -
SOAL	Sorbus aria 'Lutescens'	20-25cm	Semi Mature :Height min 5.0M :Clear Stem min. 200cm :Full crown	RB	8 -
Sau	Sorbus aucuparia	20-25cm	Semi Mature :Height min 5.0M :Clear Stem min. 200cm :Full crown	RB	3 -
					Total :80 -

Hedges

Abbreviation	Species	Specification	Height	Pot Size	Density	Number of Plants
CAR	Carpinus betulus	double staggered row: Full & bushy	100-125cm	10L	0.4Ctr	305 -
EAB	Escallonia 'Apple Blossom'	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	76 -
EeL	Elaeagnus ebbingei 'Limelight'	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	133 -
LoA	Ligustrum ovalifolium 'Aureum'	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	220 -
Ob	Osmanthus burkwoodii	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	189 -
PLO	Prunus laurocerasus 'Otto Luyken'	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	350 -
PLU	Prunus lusitanica	double staggered row: Full & bushy	60-80cm	10L	0.45Ctr	488 -
Prr	Photinia fraseri 'Red Robin'	double staggered row	60-80cm	10L	0.45Ctr	509 -
						Total :2270 -

Shrubs

Abbreviation	Species	Height	Pot Size	Density	Number of Plants
AjV	Aucuba japonica 'Variegata'	60-80cm	10L	3/m²	56 -
Bsil	Bergenia 'Silberlicht'		5-7.5L	5/m²	103 -
BIAN	Berberis thunbergii 'Atropurpurea Nana'	30-40cm	5L	4/m²	238 -
CBM	Ceanothus 'Blue Mound'	40-60cm	10L	3/m²	53 -
CET	Ceanothus thyrsiflorus repens	40-60cm	5L	4/m²	147 -
COE	Carex oshimensis 'Evergold'	40-60cm	10L	3/m²	40 -
CpS	Cistus pulverulentus 'Sunset'	20-30cm	5L	5/m²	87 -
CSB	Cornus alba 'Sibirica'	80-100cm	10L	3/m²	146 -
CIS	Choisya ternata 'Sundance'	40-60cm	10L	3/m²	105 -
EpM	Elaeagnus pungens 'Maculata'	60-80cm	10L	3/m²	237 -
EUEG	Euonymus fortunei 'Emerald Gaiety'	30-40cm	5L	4/m²	88 -
Fj	Fatsia japonica	60-80cm	10L	3/m²	62 -
HMT	Hypericum x moserianum 'Tricolor'	40-60cm	5L	4/m²	471 -
HMW	Hebe 'Mrs Winder'	40-60cm	10L	4/m²	310 -
HpS	Hebe pinguifolia 'Sutherlandii'	40-60cm	10L	4/m²	4 -
HRE	Hebe albicans 'Red Edge'	30-40cm	5L	4/m²	392 -
LMU	Lavandula angustifolia 'Munstead'	40-60cm	10L	3/m²	34 -
LNB	Lonicera nitida 'Baggesen's Gold'	40-60cm	10L	3/m²	226 -
Lsc	Leucothoe 'Scarletta'	40-60cm	10L	3/m²	207 -
MmC	Mahonia media 'Charity'	60-80cm	10L	3/m²	59 -
PAB	Potentilla fruticosa 'Abbotswood'	40-60cm	10L	3/m²	202 -
PFF	Pieris 'Forest Flame'	40-60cm	10L	3/m²	263 -
PlOL	Prunus laurocerasus 'Otto Luyken'	60-80cm	10L	3/m²	133 -
PR	Potentilla fruticosa 'Red Ace'	40-60cm	10L	3/m²	192 -
Sco	Sarcococca confusa	40-60cm	10L	3/m²	141 -
SjAW	Spiraea japonica 'Anthony Waterer'	40-60cm	5L	4/m²	271 -
SjGM	Spiraea japonica 'Gold Mound'	40-60cm	10L	3/m²	54 -
SjRu	Skimmia japonica 'Rubella'	40-60cm	10L	3/m²	316 -
Vd	Viburnum davidii	40-60cm	10L	3/m²	179 -
VtEP	Viburnum tinus 'Eve Price'	60-80cm	10L	3/m²	131 -
WfV	Weigela florida 'Variegata'	60-80cm	10L	3/m²	215 -
					Total :5162 -

Specimens

Abbreviation	Species	Specification	Height	Pot Size	Density	Number of Plants
PhAQ	Phormium 'Apricot Queen'	Double Crown	60-80cm	10L	Counted	13 -
PhJ	Phormium 'Jester'	Double Crown	60-80cm	10L	Counted	16 -
PhMS	Phormium 'Maori Sunrise'	Double Crown	60-80cm	10L	Counted	10 -
PHOPP	Phormium 'Pink Panther'	Double Crown	60-80cm	10L	Counted	5 -
PhPB	Phormium 'Platt's Black'	Double Crown	60-80cm	10L	Counted	6 -
PSu	Phormium 'Sundowner'	Double Crown	60-80cm	10L	Counted	13 -
PtVa	Phormium tenax 'Variegatum'	Double Crown	60-80cm	10L	Counted	4 -
						Total :67 -

NOTES:

For details of species refer to Plant Schedule, on sheet 03.

All soft landscaping to strictly conform to Countryside Properties Plc Performance Specification for Soft Landscape Works.

All Street Trees to be minimum 2m clear stems.

No species, centre, size etc.... is to be amended without the prior approval of the landscape architect.

Shrub Bed Topsoil:
The level of shrub bed topsoil is to be finished 50mm below the adjacent paving and grass so that when bark mulch is applied it does not spill over.

The use of pesticides and other non-organic garden chemicals are to be kept a minimum to prevent any cumulative effects within the food chain.

Good horticultural practices shall be implemented within the planting scheme e.g. use of peat-free composts and mulches and application of non-residual pesticides.

All trees / shrubs to be checked by a structural engineer in compliance of NHBC requirments for design of foundations.

For tree planting details refer to final sheet Typical Tree Pit Detail Semi Mature Tree In Soft Landscape Areas and Typical Tree Pit Detail Extra Heavy Standard Tree In Soft Landscape Areas.

Do not scale.

KEY


Shrub / Specimen / Hedge planting (Min. 450mm deep, prepared topsoil to BS 3882:2015).

All hedging to be evened up / clipped on planting (apart from Lavender if due to flower).

Area to be turfed (front gardens), turfed/seeded (Rear gardens / POS) (Min. 150mm deep, prepared topsoil to BS 3882:2015).

Proposed standard tree type in soft landscape.

Lighting

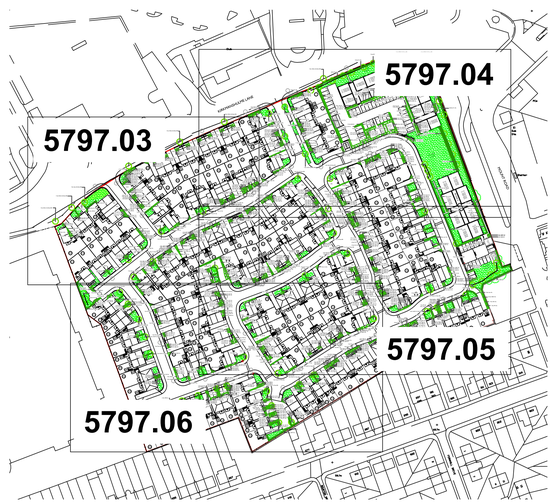

Rev	Date	By	Description	Ckk'd
E	02.08.24	NC	Amends to latest layout	NC
D	11.03.22	NC	Plant Schedule updated	NC
C	24.02.22	NC	Plant Schedule updated	NC
B	04.08.21	NC	Plant Schedule updated	NC
A	12.05.21	NC	Amends to layout, lighting, highways trees added	NC

Landscape Architecture
Arboriculture

Trevor Bridge Associates Ltd
Ashton Old Baths
Stamford Street West
Ashton-under-Lyne
Lancs OL6 7FW

Tel: 0161-804 2099
E-mail: info@trevorbridge.co.uk

COUNTRYSIDE
Places People Love

Countryside Properties (UK) Limited
Partnership North
301 Bridgewater Place,
Birchwood Park, Birchwood,
Warrington, Cheshire, WA3 6XG
Tel: 01925 248900 Fax: 01925 248901
www.countryside-properties.com

site: Belle View, Manchester

title: Landscape Detail

scale: 1:200 @A0
drawn by: NC
date: August 2020
checked: JW

drawing no: 5797.03

sheet no: 1 of 4
revision: E