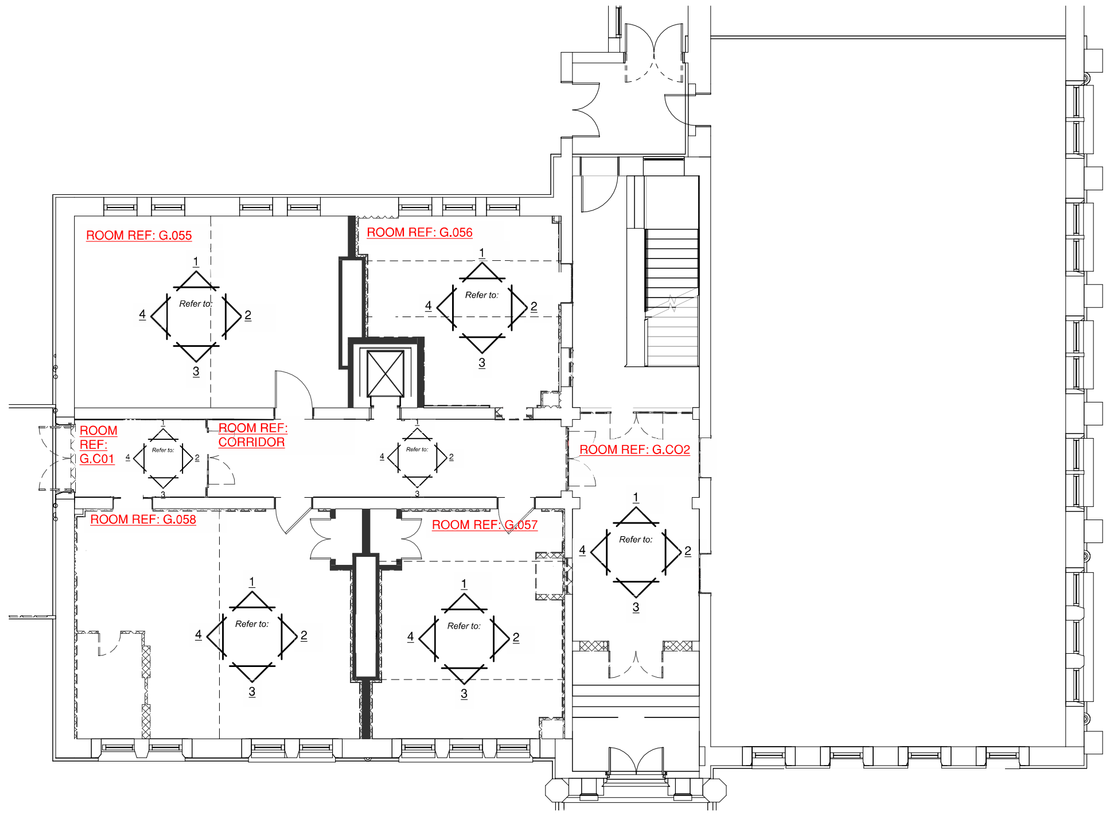




STRIP OUT SCHEDULE - ROOM G.055 (RUTHERFORD ROOM)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing radiators and associated brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
2	Existing surface mounted trunking and fixings carefully stripped out and removed	
3	Existing surface mounted conduit carefully stripped out and removed (power and data) Existing fire alarm sounder and associated cabling and fixings carefully stripped out and removed	
4	No existing MEP services on this wall	


STRIP OUT SCHEDULE - ROOM G.056 (STORE)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing radiators and associated pipework, brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework (in boxing) carefully stripped out and removed	
2	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit (behind false boxed out wall section) carefully stripped out and removed Existing emergency lighting bulkhead fitting and associated conduit (behind false boxed out wall section) carefully stripped out and removed Existing Fire Alarm sounder and associated cabling and fixing (behind false boxed out wall section) carefully stripped out and removed	
3	Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework (in boxing) carefully stripped out and removed	
4	Existing surface mounted trunking and fixings carefully stripped out and removed	

STRIP OUT SCHEDULE - ROOM G.C01 (FOYER)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
2	No MEP strip out work	
3	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing Fire Alarm panel carefully stripped out and removed Existing Security panel carefully stripped out and removed Existing FA break glass carefully stripped out and removed Existing emergency door release carefully stripped out and removed Existing door release button carefully stripped out and removed (x2) Existing press to open button carefully stripped out and removed Existing swipe cared reader carefully stripped out and removed	
4	Existing surface fixed cables (access control power) and associated fixings carefully stripped out and removed	

STRIP OUT SCHEDULE - ROOM – (CORRIDOR)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed	
2	No MEP strip out work	
3	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing surface mounted fused spurs stripped out and removed (x2) Existing emergency door release carefully stripped out and removed Existing door release button carefully stripped out and removed (x4) Existing CCTV camera carefully stripped out and removed Existing FA sounder carefully stripped out and removed	
4	No MEP strip out work	


STRIP OUT SCHEDULE - ROOM G.057 (RECEPTION)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
-	RISER :- Carefully strip out and remove: - sub mains/cables - containment/trunking/conduit - panels/DBs - switches/sockets/fittings - smoke detector	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing FA sounder carefully stripped out and removed Existing emergency lighting bulkhead carefully stripped out and removed	
2	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing BT box carefully stripped out and removed	
3	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing heating pipework (in boxing) carefully stripped out and removed	
4	Existing surface mounted trunking and fixings carefully stripped out and removed	

STRIP OUT SCHEDULE - ROOM G.058 (OFFICE)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing surface mounted trunking and fixings carefully stripped out and removed Existing FA sounder carefully stripped out and removed Existing door release button carefully stripped out and removed (x2) Existing fused spurs carefully stripped out and removed (x3) Existing emergency lighting bulkhead carefully stripped out and removed (x2)	
2	Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit carefully stripped out and removed Existing unidentifed control box carefully stripped out and removed	
3	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	
4	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing surface mounted trunking and fixings carefully stripped out and removed Existing surface mounted conduit and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed	

STRIP OUT SCHEDULE - ROOM G.C02 (CORRIDOR)

WALL REFERENCE	DESCRIPTION	PHOTO
-	CEILING: Existing lights and associated containment and fixings carefully stripped out and removed. Existing smoke detection and associated cabling and clips carefully stripped out and removed	
-	FLOOR: No MEP strip out work	
1	Existing access control swip card reader carefully stripped out and removed	
2	Existing heating pipework **TO REMAIN - THIS SERVES THE MUSEUM**	
3	No MEP strip out work	
4	Existing radiator and associated brackets and fixings carefully stripped out and removed Existing heating pipework carefully stripped out and removed Existing access control swip card reader carefully stripped out and removed Existing CCTV camera carefully stripped out and removed Existing FA sounder carefully stripped out and removed Existing intruder alarm sensors carefully stripped out and removed	

P01	LISTED BUILDING CONSENT	JL	JF	RC	23.05.24
Rev	Amendment	By	Chk	App	Date

Status: S3
Description: SUITABLE FOR REVIEW AND COMMENT
Stage: 4

Client: MANCHESTER 1824 The University of Manchester

Project: UNIVERSITY OF MANCHESTER
RUTHERFORD BUILDING

Drawing: MECHANICAL & ELECTRICAL SERVICES STRIP OUT DRAWING GROUND FLOOR

CAD 21 LTD BUILDING SERVICES & ENERGY CONSULTING ENGINEERS
NEWCASTLE ◘ TEESSIDE ◘ YORKSHIRE ◘ NORTH WEST

Drawing Number: UOMRB-CAD-XX-00-DR-ME-10000
Revision: P01

Scale: 1/100
Size: A1

Drawing Origins :