


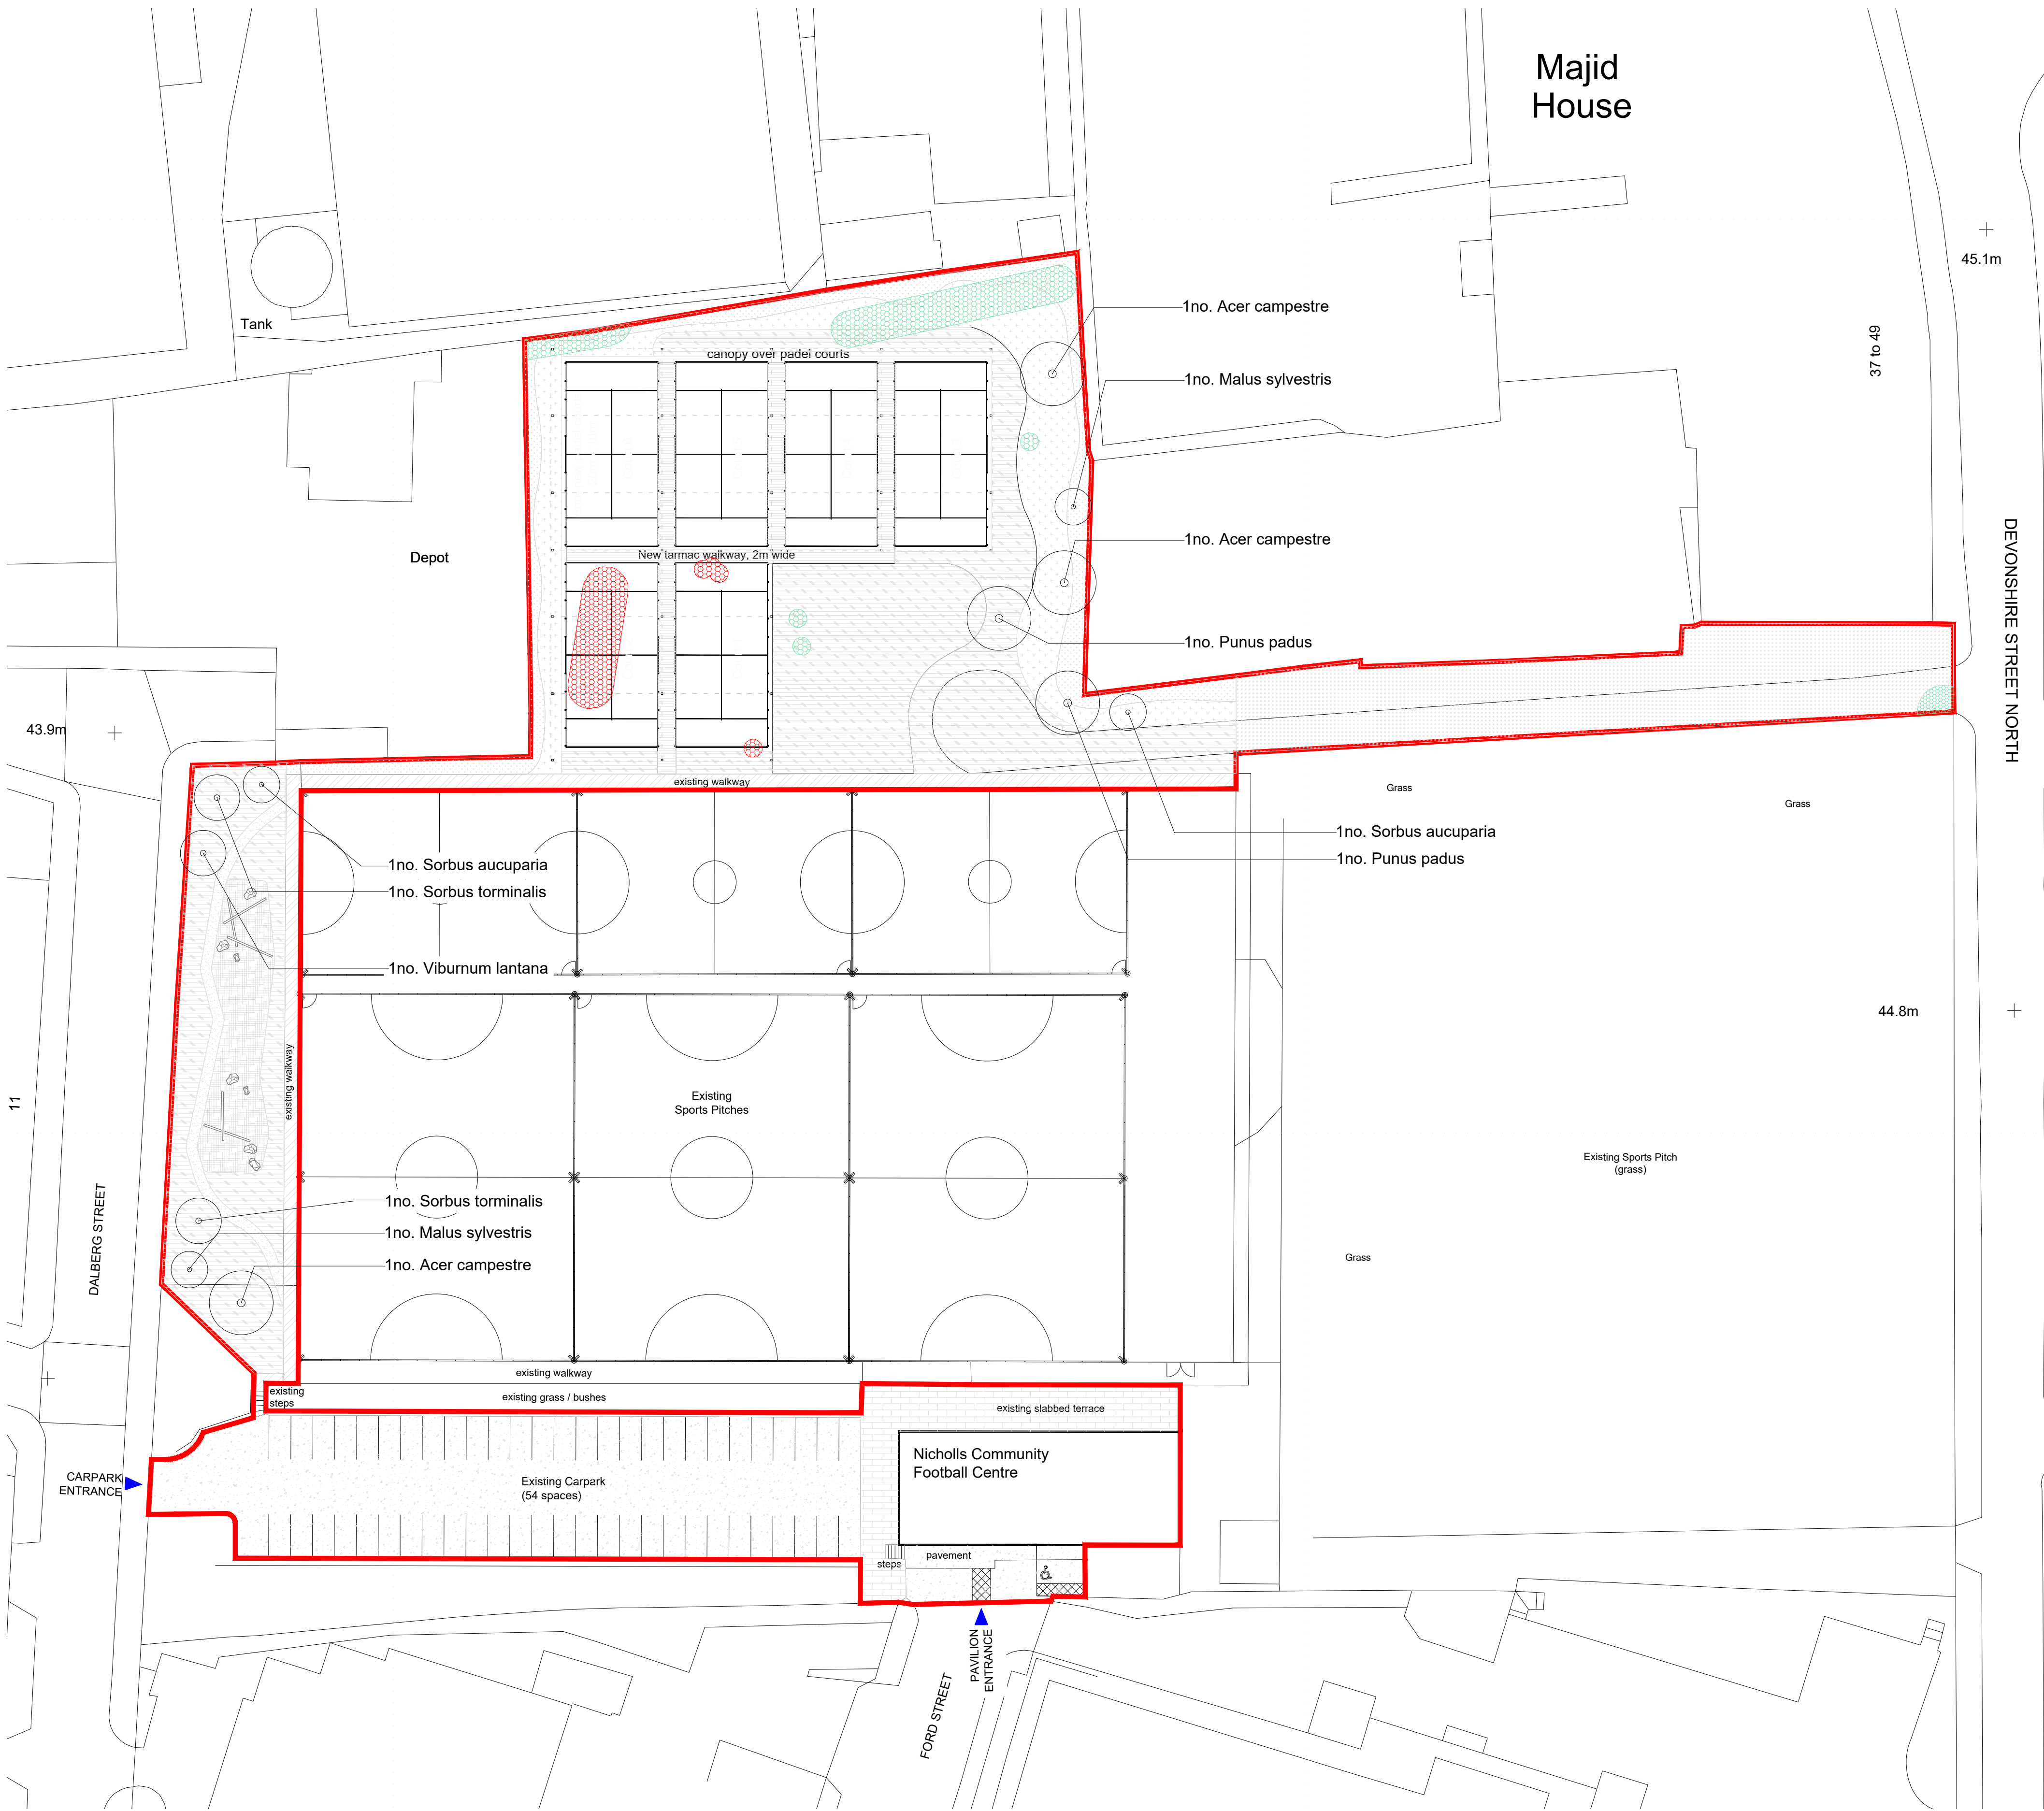

This drawing is to be read in conjunction with drawings prepared by the architects, structural engineers and service consultants and all other relevant details and information.

Any queries or discrepancies must be reported immediately to the landscape architect.

Do not scale: use figured dimensions only.

Drawing not for construction

Legend

Application Boundary

- Red Line boundary
- Existing tree / group of trees to be removed
Refer to drawings prepared by Arbrech Consulting Ltd
- Existing trees / tree group to be retained
Refer to drawings prepared by Arbrech Consulting Ltd
- Proposed trees
14-16cm girth
1.5m clear stem
Container grown

Notes:

- To be read in conjunction with L050-RP01 Landscape Statement, Arboricultural report by Arbrech and Ecological Report by Greengage.
- Exact tree locations may vary on site due to unknown services and below ground services.
- Planting in visibility splays to be under 600mm.
- All planting proposals dependent on detailed soil sample testing and subject to detailed design layouts.
- All tree planting within 3.0m of proposed subterranean drainage connections to have root barriers to engineers specification.
- Strata cells by GreenBlue Urban (or equivalent) to be used for tree root space to ensure longevity and success of specified tree.

GENERAL NOTES:
This drawing is to be used for planting information only, and is subject to alteration through changes to the site layout or until approved by the area designer.


Any species substitution by the contractor must be verified with the Landscape Architect through the Job Architect.

Excavations: Contractors must ensure that they have full information relating to service and drainage positions before undertaking any excavations.

Tree bases to be mulched with ornamental bark mulch to a consolidated depth of 50mm.

Root barriers to be used for tree planting adjacent to kerbs/ services/ footpaths etc- Greenleaf Reroot 1000, or similar application refer to manufacturer's instructions.

All trees to be supplied clear stem 1.5m except feathered/multistem specimens where applicable.

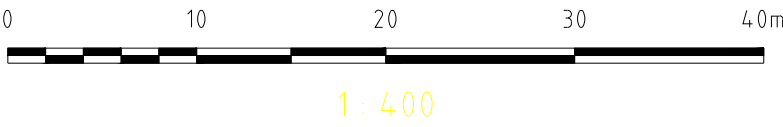

PLANNING

Powerleague,
Manchester Nicholls



Rev.	Date	Drawn	Check	Item

Rev.	Date	Drawn	Check	Item

Project	Powerleague, Manchester
Client	Powerleague Fives Limited

Drawing Title	Tree Planting Plan	Date	25-03-2024	Drawn	FM
Description		Scale	1:400 at A1	Check	NS
Drawing Number	L050-PL-02	Rev.	-		