DO NOT SCALE THIS DRAWING. IF IN DOUBT ASK

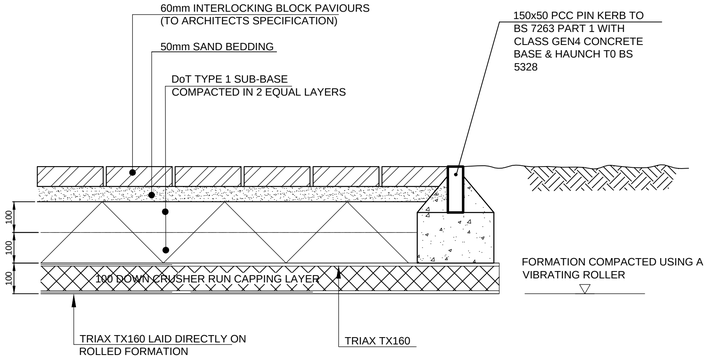

TYPICAL SECTION THROUGH PEDESTRIAN BLOCK PAVING (1:10)

SMA WEARING COURSE TO ADOPT 14mm SIZE AGGREGATE TO BS 594 : PART1 : GROUP 2 AND LAID IN ACCORDANCE WITH CLAUSES 702, 703, 901, 911 AND 915 OF DtP SPECIFICATION FOR HIGHWAY WORKS 1986.

BITUMINOUS BASE COURSE TO BE 60mm THICK - 20mm AGGREGATE TO SECTION 6.5 OF BS 4987 PART 1 AND LAID IN ACCORDANCE WITH BS 4987 PART 2 AND CLAUSES 702, 703, 901 AND 906 OF DtP SPECIFICATION FOR HIGHWAY WORKS 1986.
BINDER TO BE 150 PEN BITUMEN

ROAD-BASE TO BE GRANULAR MATERIAL, TYPE 1 AS PER DtP SPECIFICATION CLAUSE 803 LAID IN ACCORDANCE WITH DtP CLAUSE 802 - REFER TO DETAILS FOR SPECIFIC DEPTHS.

TENSAR SS30 GEOGRID TO HAVE MINIMUM 300mm LAPS AND MUST BE LAID IN ACCORDANCE WITH MANUFACTURERS DETAILS AND RECOMMENDATIONS.

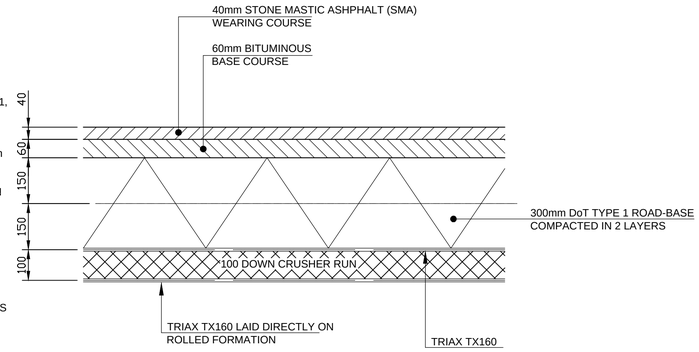

TYPICAL SECTION THROUGH LIGHT DUTY CAR PARK AREAS (1:10)

WEARING COURSE TO BE 14mm SIZE SMA AND LAID IN ACCORDANCE WITH BS 4987 PART 2 AND CLAUSES 702, 703, 901 AND 912 OF DtP SPECIFICATION FOR HIGHWAY WORKS.
BINDER TO BE 200 PEN BITUMEN

BASE COURSE TO BE 60mm THICK - 20mm AGGREGATE DENSE BITUMEN MACADAM TO SECTION 6.5 OF BS 4987 PART 1 AND LAID IN ACCORDANCE WITH BS 4987 PART 2 AND CLAUSES 702, 703, 901 AND 906 OF DtP SPECIFICATION FOR HIGHWAY WORKS.
BINDER TO BE 150 PEN BITUMEN

ROAD BASE TO BE 100mm THICK - 20mm AGGREGATE DENSE BITUMEN MACADAM AS BASE COURSE.

SUB-BASE TO BE GRANULAR MATERIAL, TYPE 1 AS PER DtP SPECIFICATION CLAUSE 803 LAID IN ACCORDANCE WITH DtP CLAUSE 802 - REFER TO DETAILS FOR SPECIFIC DEPTHS.

TRIAX TX160 TO HAVE MINIMUM 300mm LAPS AND MUST BE LAID IN ACCORDANCE WITH MANUFACTURERS DETAILS AND RECOMMENDATIONS.

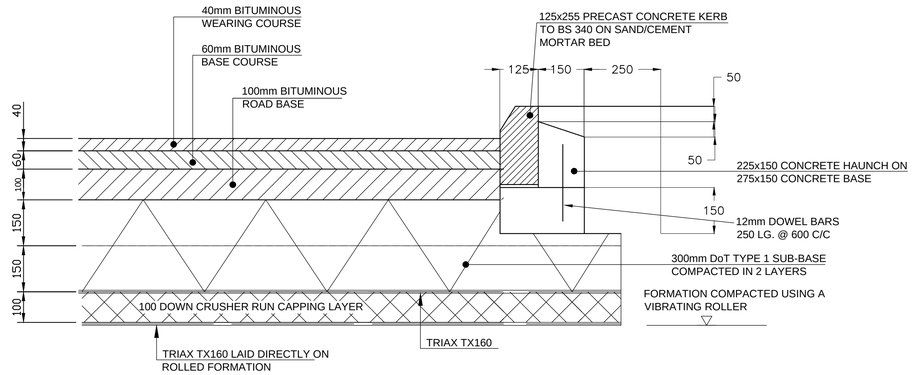

TYPICAL SECTION THROUGH HEAVY DUTY VEHICLE ROUTE (1:10)

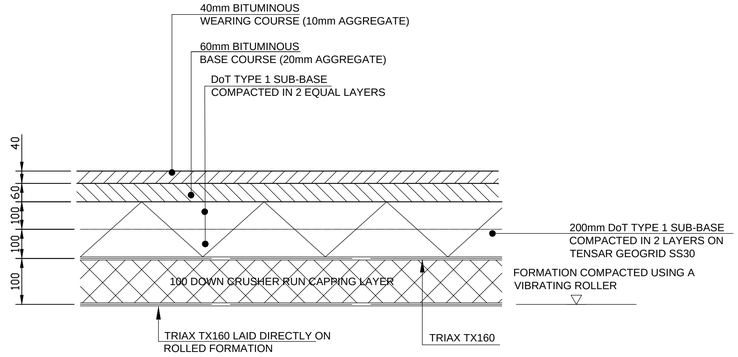

TYPICAL SECTION THROUGH PEDESTRIAN BITUMINOUS PAVING (1:10)

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH DRG. No. 1747-4/3

NOTES | A1

Rev.	Description	By	Date

Client: CHICKEN CABINS LTD.

Site address: KFC DRIVE THROUGH SECTION OF TESCO CAR PARK ALTRINCHAM ROAD, BAGULEY. MANCHESTER, M23 9TJ.

Stevenson Calam Associates
CONSULTING ENGINEERS
ORNHAMS HALL, BOROUGHBRIDGE, NORTH YORKSHIRE. YO51 9JH.
Telephone (01423) 530999
Facsimile (01423) 520028
Email: stevenson.calam@btconnect.com

Title: EXTERNAL WORKS (SHEET 2 OF 2)

Project Manager/ Checked	Drawn By	Scale	Date
GS	NC	AS SHOWN	FEB. 2022

Drawing Number: 1747-4/4 | Rev.