




LIGHTING COLUMNS



STRIP LIGHTING



UPLIGHTERS

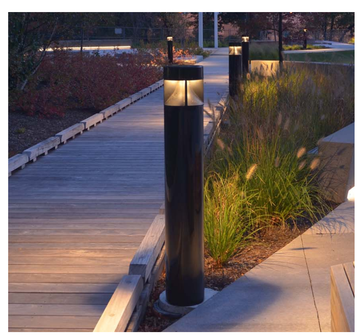

LIGHTING BOLLARDS

© THIS DRAWING IS COPYRIGHT PROTECTED AND MAY NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN AUTHORITY FROM THE OWNER.

NOTES:
1. Do not scale from this drawing.
2. Always work to noted dimensions.
3. All dimensions are in millimetres unless otherwise stated.
4. All setting out, levels and dimensions to be agreed on site.
5. The dimensions of all materials must be checked on site before being laid out.
6. This drawing must be read with the relevant specification clauses and detail drawings.
7. Order of construction and setting out to be agreed on site.

KEY

LIGHTING KEY

A **Bollard Lighting**
Product: Arcluce Kiou / Kubix or similar and approved.
Low level lighting
Size: 1000mmH x 180mmdia.
Colour: Powder coated RAL 7016.
Fixing: Plate mounted below ground to engineer's detail.
Supplier: Kingfisher Lighting

B **Recessed Strip Lighting**
To top edge of selected planters and seating plinths. To be recessed below folded edges.
Frameless finish with edge to edge continous illumination
RGB LED with fixed colour. Colour TBC.
Design: To provide a subtle glow rather than provide illumination.

C **Small Multi Direction Lighting Columns**
Product: Arya,
Size: 5m height.
Colour: RAL 7016.
Fixing: Plate mounted below ground to engineer's detail.
Supplier: Kingfisher Lighting.

D **Uplighters**
To trees and underside of slot site stairs
Directional, soft diffused light.

E1 **Bespoke Totem Signage**
Internally illuminated.
Approx Dimensions: 500mmW x 100mmD x 2000mmH
Subject to detailed design coordination.

E2 **Digital Advertising Totem**
Approx Dimensions: 700mmW x 150mmD x 2000mmH
Subject to detailed design coordination.

F **Feeder Pillar**
Dimensions: 800mmW x 350mmD x 1194mmH.
Colour: RAL TBC - to match stair steelwork.
Exact location within blue dotted line subject to confirmation on relocation of existing feeder pillars.

G **Wall-mounted luminaire Lighting.**
To hoarding line at ground level.
Directional, soft diffused light.
Supplier: Iluminaire or similar and approved.
Product: 22242.K3 or similar and approved.

Existing Traffic Light Control Box and Associated Pillars.
Retention / Removal to be confirmed.
Location taken from topo survey.

Existing Feeder Pillars.
To be removed.
Location taken from topo survey.

Refer to NBS section V91

Revision	Date	Description	Drawn	Apprvd.
D4-C02	11.04.22	For construction	TF	KR
D4-C01	04.02.22	For construction	TF	KR
S1-P09	28.01.22	For coordination	TF	KR
S2-P08	13.01.22	For information	TF	KR
S1-P07	04.11.21	Stage 4+	TF	KR
S2-P06	17.06.21	For information	TF	KR
D4-C01	04.02.22	For construction	TF	KR
S1-P05	10.06.21	Draft Tender	TF	KR
P04	12.04.21	Reference to in-ground lighting omitted from key. Reference images added	TF	KR
P03	26.03.21	Design update	TF	KR
P02	11.02.21	Design update	TF	KR
P01	18.06.20	Planning Issue	TF	KR

Planit I.E. Limited
E: info@planit-ie.com **W:** planit-ie.com
MANCHESTER
2 Back Grafton St , Altrincham, WA14 1DY
T: 0161 928 9281
LONDON
Unit 6 Waterside, 44-48 Wharf Road, London, N1 7UX
T: 0207 253 5678
LIVERPOOL
Tempest 5.3, 12 Tithebarn Street, Liverpool, L2 2DT
T: 0151 363 1230

Client ASK

Project Viadux, Greater Bridgewater Street Stair and Lift

Drg Title Lighting Strategy - Phase 1

Created on	Created by	Approved by
18-06-20	TF	KR

Scale	Size	Workstage
1:200	A1	Stage 5

Drg No. VIA-PLA-XX-XX-DR-L-4002
Suitability D4
Revision C02

© Planit I.E. Limited