

NOTES

INTERNAL DOORS & SCREENS FROM STEEL W20 SECTIONS


ALL FRAMES TO BE PPC TO RAL 7016

GLAZING TO INTERNAL DOORS & SCREENS TO BE 6mm CLEAR TOUGHENED UNLESS NOTED OTHERWISE

DOORS TO INCLUDE HINGES AND LOCKCASE, OVERHEAD CLOSERS AND CONCEALED SHOOTBOLTS. HANDLES AND CYLINDERS TO BE SUPPLIED BY OTHERS


OVERHEAD CLOSERS TO BE FIXED TO PLATE ON HEADFRAME WITH ARM FIXED TO BRACKET ON HEAD OF DOOR LEAF. ALL TO BE PPC TO MATCH FRAMES. CLOSERS TO HAVE BACKCHECK HOLD OPEN FACILITY

DIMENSIONS ARE INDICATIVE AND BE CHECKED ON SITE PRIOR TO MANUFACTURE

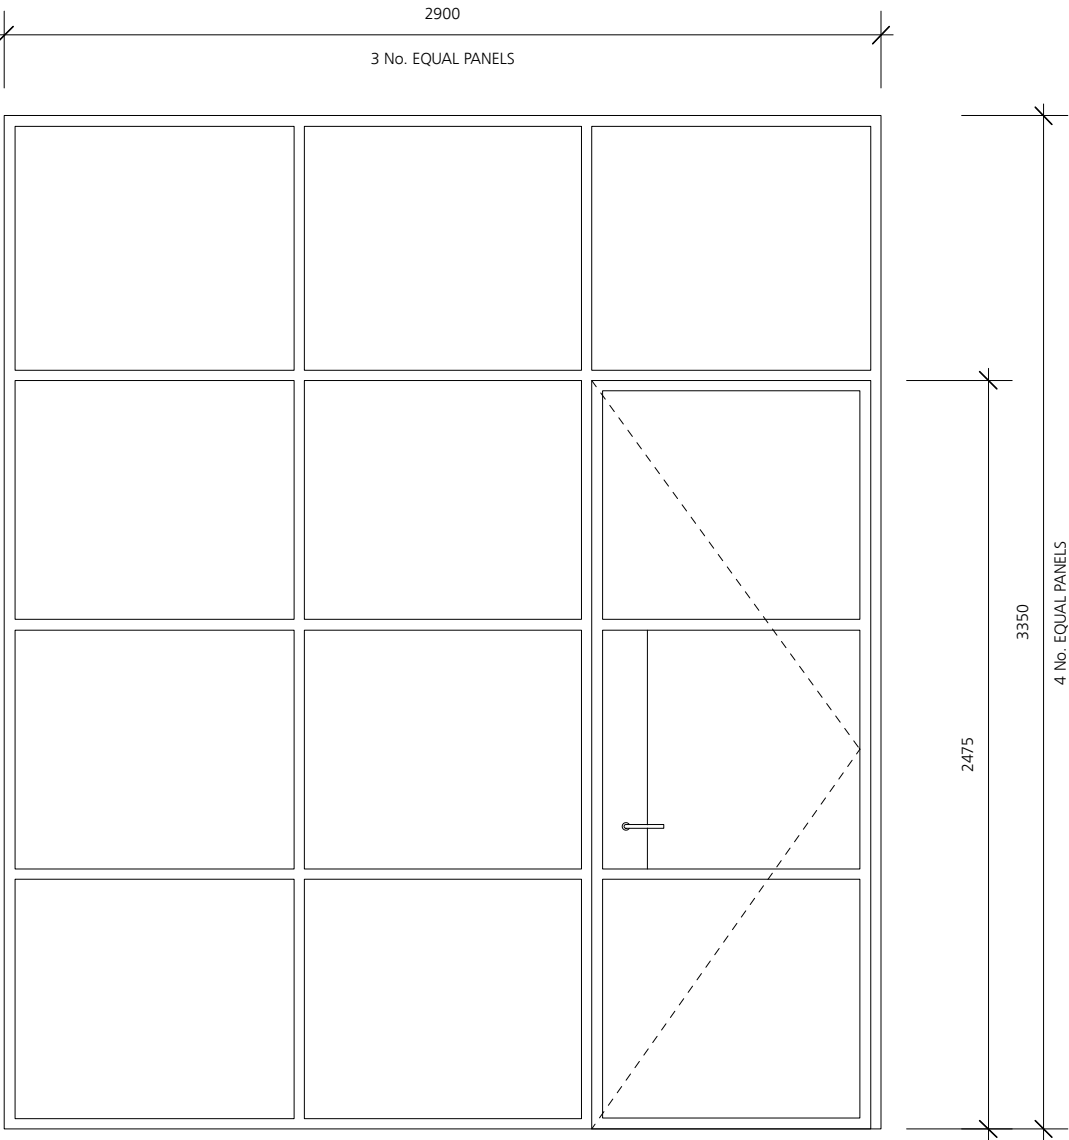

SCREEN TYPE SS1

GLAZED SCREEN TO Gnd FLOOR MEETING ROOMS, KITCHEN & OFFICE - NON FIRE RATED

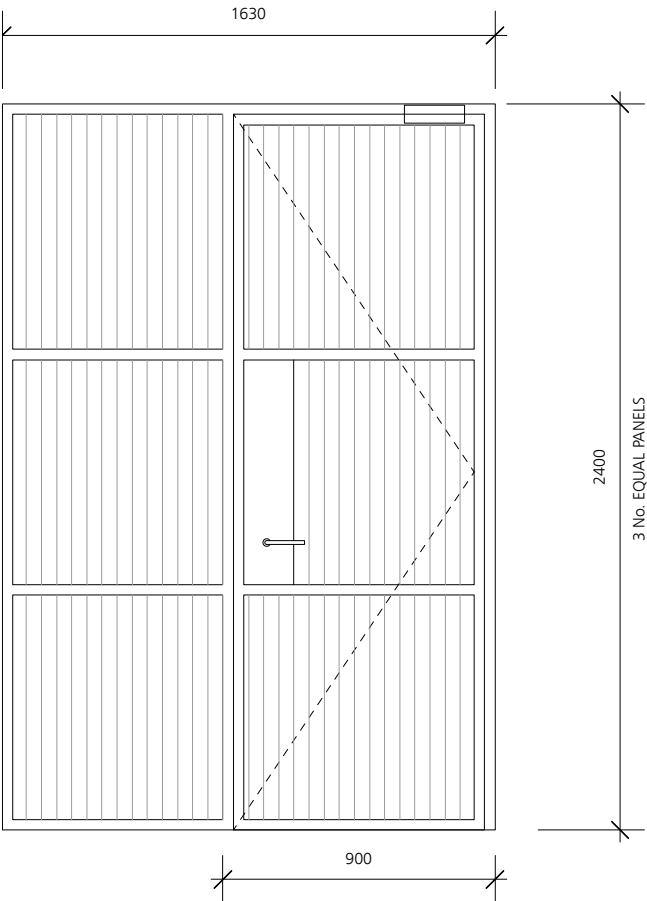


SCREEN TYPE SS2

GLAZED SCREEN TO 1st, 2nd & 3rd FLOOR OFFICE ENTRANCES

SCREEN TO BE FD30 FIRE RATED.

FIRE RATED GLASS TO INCLUDE FOR ADDITIONAL LAYER OF REEDED GLASS TO ALL PANELS ON STAIRCASE SIDE OF DOOR

OVERHEAD CLOSER REQUIRED

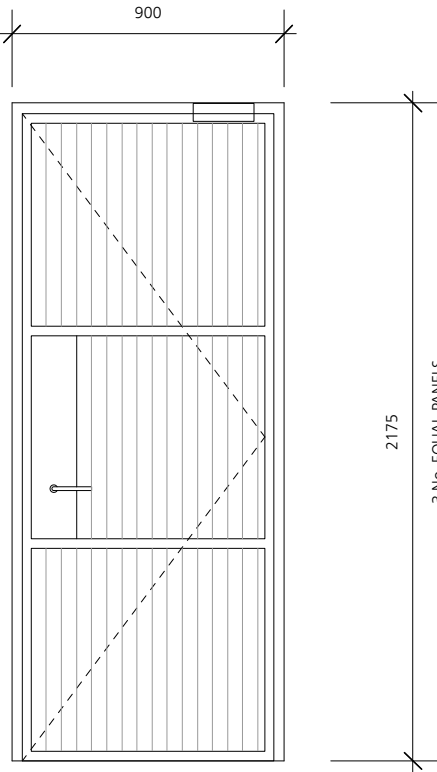

SCREEN TYPE SS3


GLAZED SCREEN TO 4th FLOOR OFFICE ENTRANCE

SCREEN TO BE FD30 FIRE RATED.

FIRE RATED GLASS TO INCLUDE FOR ADDITIONAL LAYER OF REEDED GLASS TO ALL PANELS ON STAIRCASE SIDE OF DOOR

OVERHEAD CLOSER REQUIRED

Rev T1 - 11/23 - Tender issue
Rev P2 - 11/23 - All internal screens changed to steel W20 sections in lieu aluminium



DRAWING TO BE READ IN CONJUNCTION WITH SCHEDULE 353 CD 3001

DIMENSIONS GIVEN ARE INDICATIVE ONLY AND ARE TO BE CHECKED ON SITE PRIOR TO FABRICATION

Jonathan Davidson Architects

Architecture & Industrial Design | 47 Hilton Street
MANCHESTER
M1 2EF
t: 0161 711 0835
e: inbox@jddavidsonarchitects.com
w: www.jddavidsonarchitects.com

Client Capital & Centric
Project Neptune Mill
Chapeltown St, Manchester
Scale 1:25 @ A3
Date Aug 2023

Document Doors & Windows
Internal Glazed Screens & Doors 1/2
Status For information

Doc Ref	353	CD	3008	T1
---------	-----	----	------	----