

GENERAL NOTES

Fully remove all existing security mesh coverings to windows and door openings, plus remove all temporary steel secure doors etc to fully expose existing windows and doors ready for renewal as window and door schedule drawings.

Fully remove and disconnect all existing rainwater goods and drainage pipes ready for full renewal


Fully remove all existing roof coverings and details ready for full renewal as roofing drawings.

All existing lighting, MSE installations, aerials etc to be fully disconnected and removed as MEP drawings.


All existing graffiti damage to elevations to be fully removed back to existing brickwork.

Make good all surfaces to be retained.

PITCHED ROOF COVERINGS
All pitched roof coverings renewed with new Metrolite Decra Cube Tile in Ebony

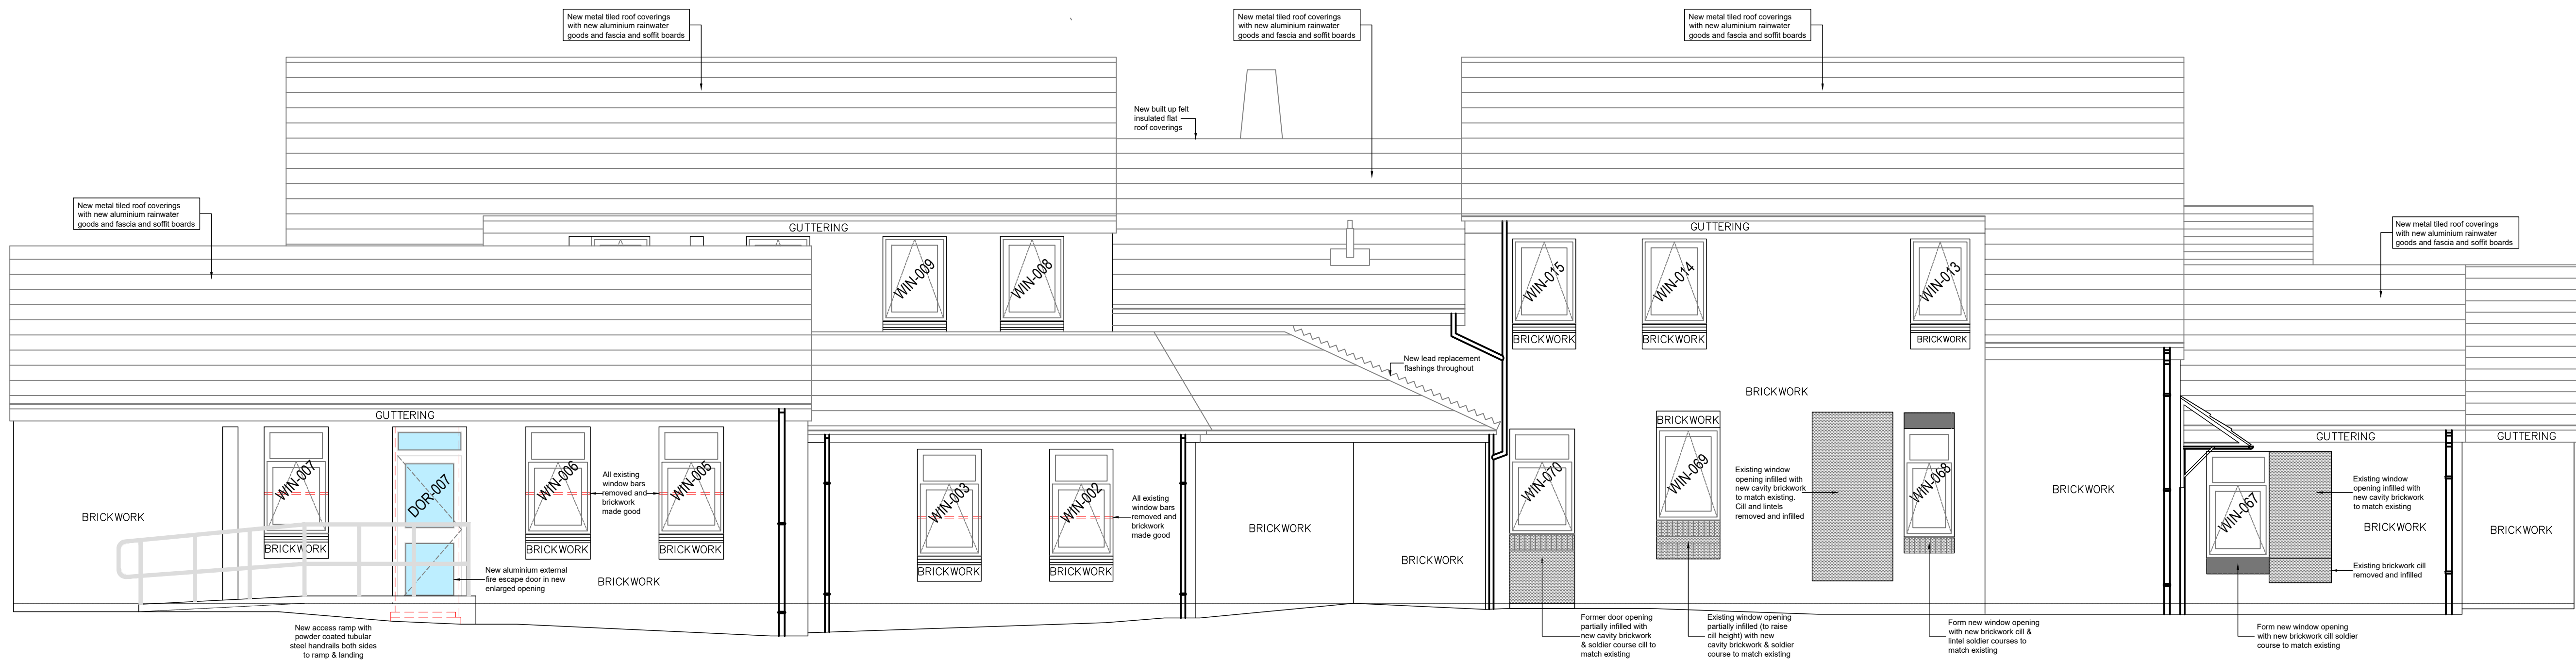

MAIN BUILDING - ELEVATION A

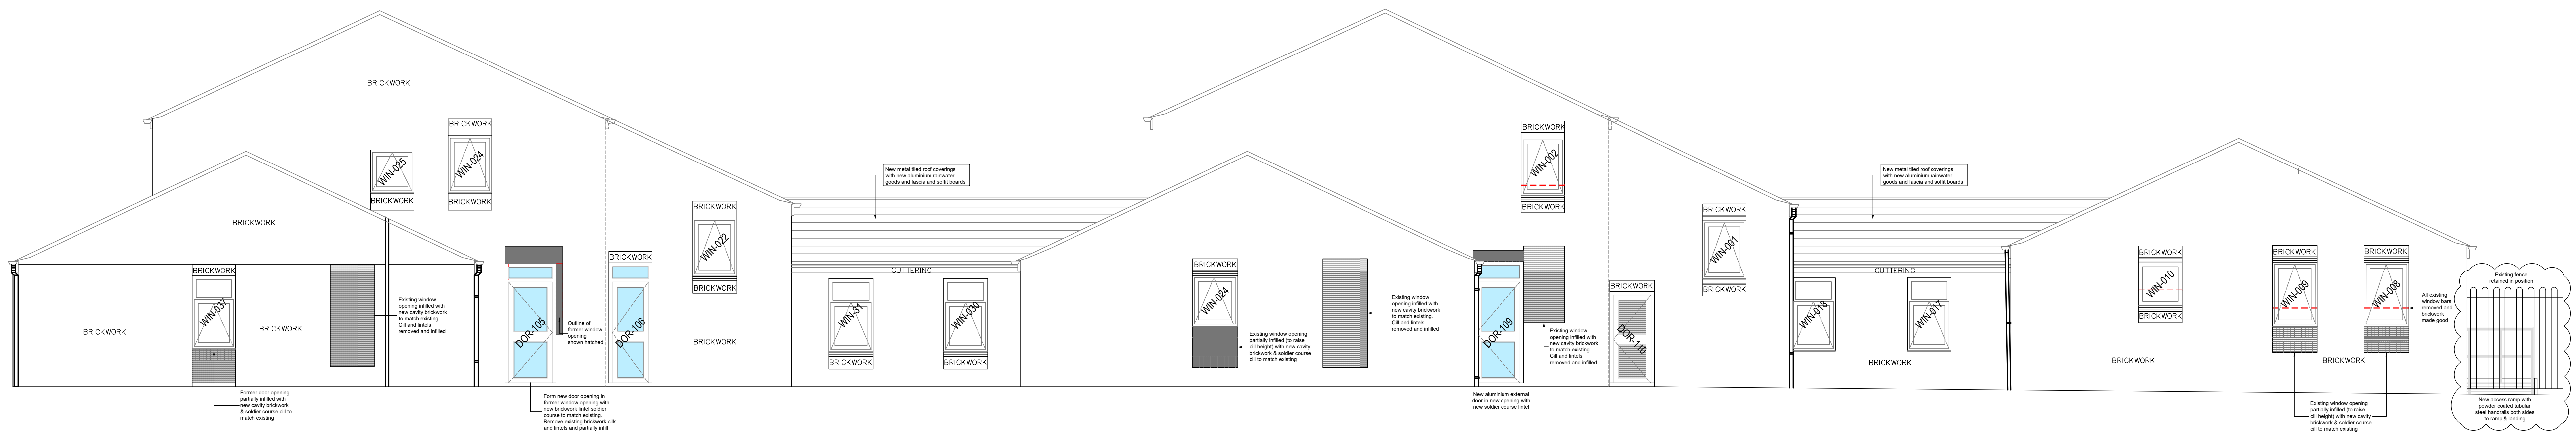

MAIN BUILDING - ELEVATION B

- NOTES**
- All dimensions are in millimetres unless otherwise stated
 - This drawing is to be read with all other relevant documentation
 - Do not scale from this drawing, all measurement data should be taken directly from the model

LEGEND

