


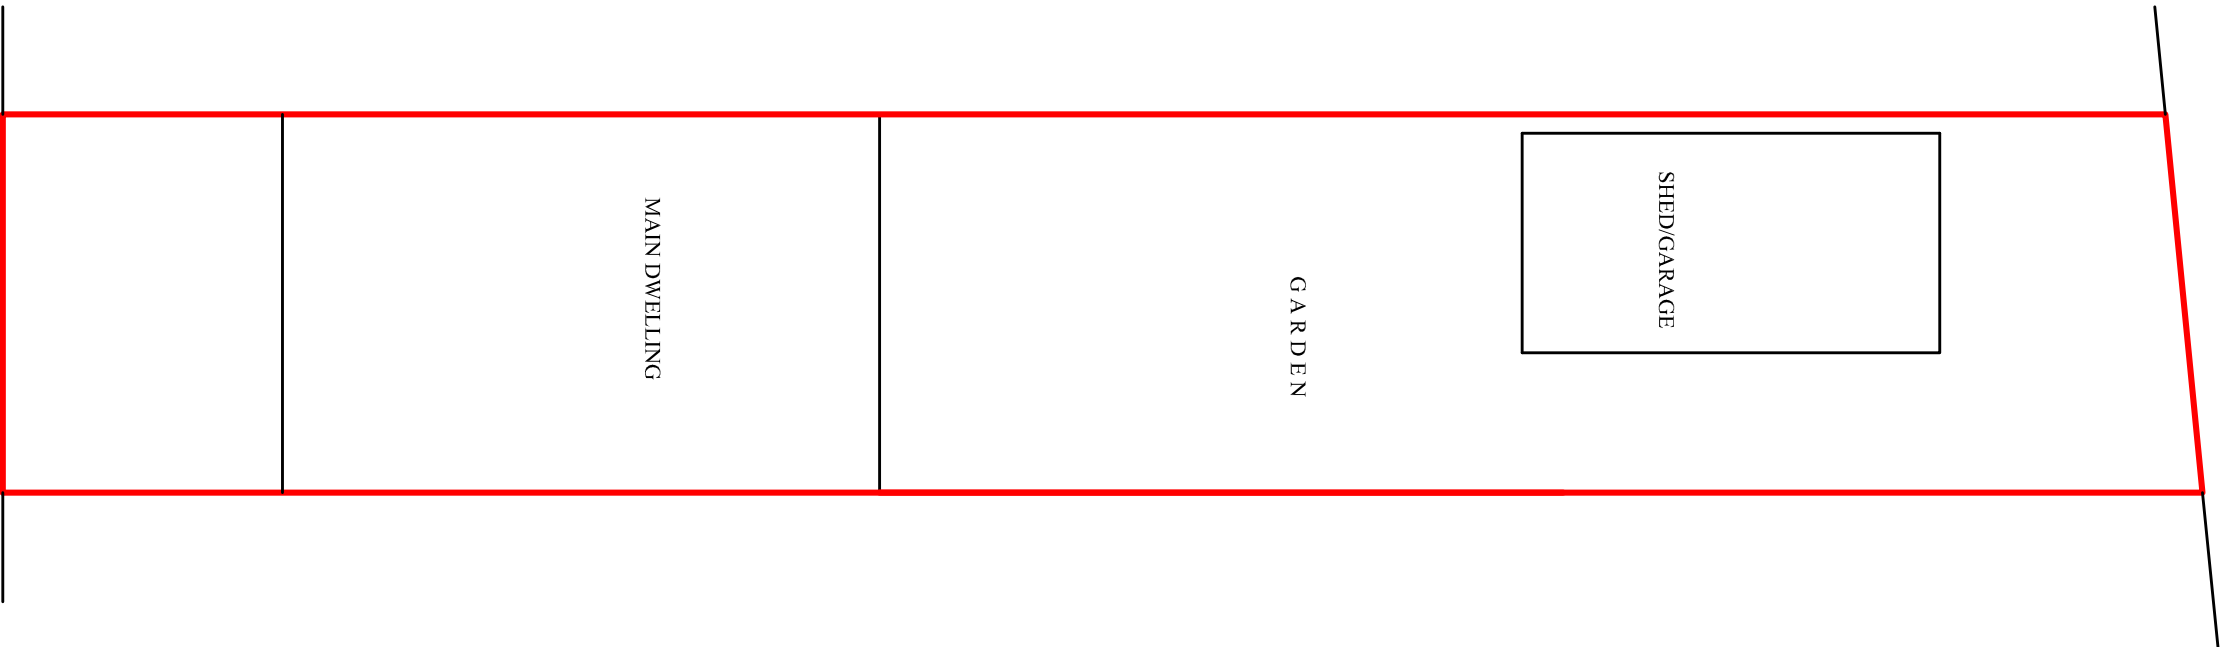

EXISTING PLAN 1:100

- Mid span strutting should be provided to floor and ceiling joists.
- Where new brickwork abuts existing walls cavities should be continuous.
- A cavity tray (300mm wide DPC) to be provided over the brickwork on all door and windows opening and single storey roof abutment.
- All internal and external lintels to have 150mm minimum bearing.
- 30x5mm x 1.2m galvanneal steel straps to be used for lateral restraint at top with gable wall and roof rafters and at wall plate @ 2m c/c .
- Steel work to Structure Engineer's design and specifications. Boxed in 2 layers of plasterboard or single layer of Fireline.
- Sockets and switches between 450mm and 1200mm.
- All drainage to the satisfaction of the LABC Inspector on site.
- All new gas and heating works to be carried out by a Gas Safe Registered Installer and certificate to be provided on completion.
- All new Electrical work to be carried out by a qualified and competent person and certificate to be issued on completion of works.
- All smoke & heat detectors to be battery packed, mains powered, hardwired and interlinked to all storey landings.
- New 102mm facing brick work to match existing. 125mm Cavity to be partly filled with 75mm Kinspan's Thermawall TW50/Celotex CW4000 cavity insulation OR 150mm cavity to be fully filled with Knauf's Drithem 32 cavity insulation.
- 100mm Thermalite block work to internal skin. Dot & dab plasterboards taped and skim finished.
- Proposed external walls incorporating appropriate cavity wall ties, at max. 750mm horizontal and 450mm vertical centers (300mm at wall reveals).
- All studwork to be 12.5mm plasterboard (12.5mm moisture resistant in bathrooms) either side of 75x50mm softwood framework @ max. 400mm c/cs, head and sole plate to be provided. With gypsum skim finish to plasterboard and 75mm 'crown framethem' insulation between framework.
- All new windows to use double glazed units with a 'low-e' soft coating with an emissivity of 0.05. The double glazed panes are to be separated by a 16mm gap to provide a U-value of 1.4w/m²k.
- Trickle vents to windows. Safety glazing to critical locations as per approved document K1. Windows to open 1/20 th of the floor area. All first floor habitable room windows to be fire escape, windows to be 800-1100mm above FFL. Safety glazing to critical locations.
- Ceiling to be 12.5mm Gyproc Wallboard Duplex taped and skimmed. NOTE - Special precautions may be required when electric cables are covered by insulating materials.
- All internal SVPs to be boxed in with 2 No. layers of 12.5mm plasterboard, outer layer to be moisture resistant, on 75x50mm softwood framework @ max. 400mm c/cs with 30mm 'QuietZone Acoustic Blanket' fixed to manufacturers specification and an access panel to enable rodding of the Soil Pipe. All pipe work to be wrapped in 'QuietZone Partition Roll'.

CDM Regulations

The client has been advised of his duties to appoint a principal designer and principal contractor for works to commercial properties and notify the HSE using F10 form if should the construction programme extend beyond 30 days in duration with more than 20 operatives on site at any one time or will involve more than 500 person days work. For domestic clients (those person engaging services to be undertaken on their own home) the duties under CDM regulations are to be undertaken by principal contractor (or in the case where more than one contractor, the Client Must appoint once contractor to take the role of Principal Contractor who will have a responsibility to coordinate all H&S matters across all contractors involved in the project)

The client has Not appointed N A Design as the Principal Designer to undertake duties required under this role as required under CDM Regulations 2015. The client is aware of their legal duty to appoint competent person to undertake this role in good time Before the construction work commence on site to ensure that the project has been effectively planned, managed, monitored and coordinated with respect to health and safety matters.

The client must ensure that all the pre construction information obtained and provided in good time to The Contractor/ Principal Contractors before construction activities commence and Principal Contractor Must prepare a suitable Construction Phase Plan on all project before work commence on site.



No services investigation has been carried out, Contractor must undertake 'dial before you dig', tel 0800 0855 865, investigation before commencing on site. The client must undertake all necessary enquiries with sewerage and utilities companies to establish exact route of any public sewer/ water mains etc and obtain all necessary agreements/ diversions before commencing any work.

All works at height to be undertaken from appropriate working platforms.

The Contractor shall check and verify all building and site dominions, levels and sewer invert connection points before work commences

The contractor shall comply with all workmanship clauses in BS8000 series and in full compliance with the Building Regulations.

This drawing is to be read in conjunction with structural engineers' design details.

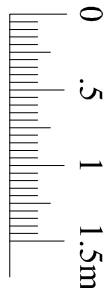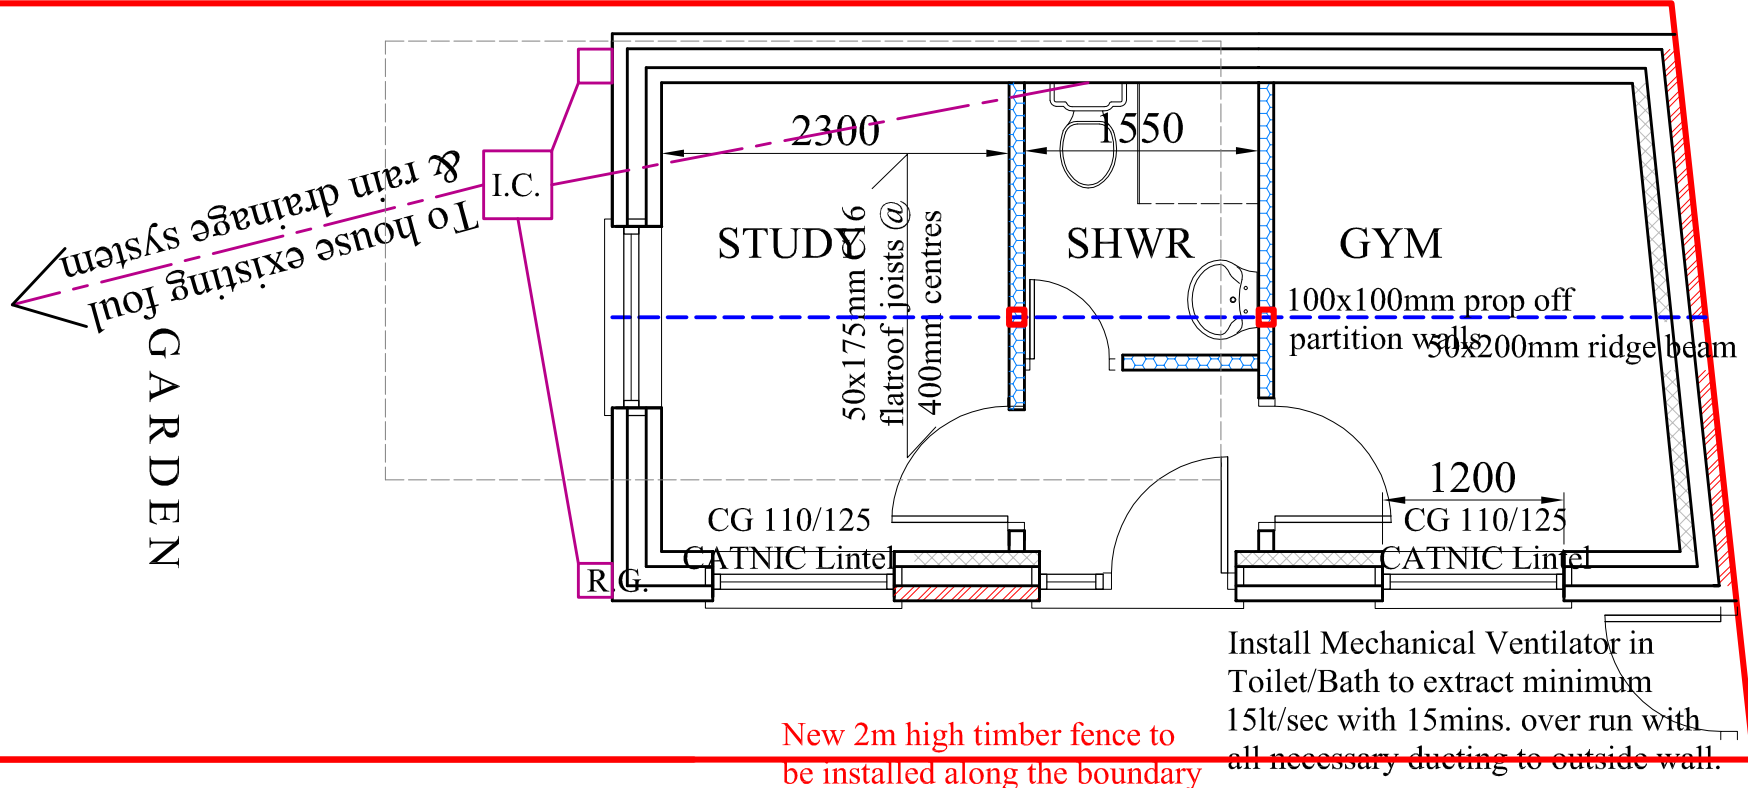

PURPOSE OF ISSUE BUILDING CONTROL

Do not scale from this drawing. All information should be checked by the contractor on site before commencing work. Any discrepancies should be reported to the architect immediately. All rights are reserved and are not transferable. Unauthorised reproductions of this drawing are not permitted.

GENERAL NOTES

- (1) THE CONTRACTOR IS TO CHECK AND VERIFY ALL BUILDING AND SITE DIMENSIONS, LEVELS AND SEWER INVERT LEVELS AT CONNECTION POINTS BEFORE WORK COMMENCES.
- (2) THE CONTRACTOR IS TO COMPLY IN ALL RESPECTS WITH THE CURRENT BUILDING REGULATIONS WHETHER OR NOT SPECIFIED OTHERWISE IN THE DRAWINGS.
- (3) BEFORE WORK COMMENCES THE CONTRACTOR SHALL ENSURE ALL PLANNING CONDITIONS AND BUILDING REGULATION CONDITIONS HAVE BEEN RESOLVED TO THE SATISFACTION OF THE LOCAL AUTHORITY.
- (4) ALL WORKS TO COMPLY WITH THE WORKMANSHIP CLAUSES IN BS8000 SERIES AND TO BE IN FULL COMPLIANCE WITH THE BUILDING REGULATIONS.
- (5) CONTRACTOR IS TO NOTIFY BUILDING CONTROL AT THE APPROPRIATE STAGES IN CONSTRUCTION – NECESSARY FOR THEM TO DETERMINE THE WORKS STATUTORY COMPLIANCE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND UNDERSTANDING THE PLANS AND ANY APPROPRIATE STRUCTURAL DETAILS BEFORE ANY WORK COMMENCES ON SITE.
- (7) THE PLANS RELATING TO THE PROPOSED PROJECT TO BE READ IN CONJUNCTION WITH ALL APPROPRIATE STRUCTURAL ENGINEERS' DETAILS.
- (8) DO NOT SCALE FROM PLANS, USE FIGURED AND ON SITE DIMENSIONS ONLY. IF QUERIES ARISE ON SITE CONTACT SITE AGENT.
- (9) THE CONTRACTOR IS TO CHECK ALL DIMENSIONS ON SITE PRIOR TO COMMENCEMENT OF WORK ON SITE AND ANY DISCREPANCIES BE BROUGHT TO THE ATTENTION OF THE SITE AGENT.
- (10) ALL SITE WORK TO BE CARRIED OUT TO THE BUILDING REGULATIONS 2010, ITS REVISIONS, CURRENT BRITISH STANDARDS AND CODES OF PRACTICE.
- (11) ALL STATUTORY SITE INSPECTIONS ARE TO BE SEEN AND APPROVED BY L.A.B.C.O. PRIOR TO ANY COVERING UP OF WORK.
- (12) NO WORK IS TO BE CARRIED OUT FROM THIS PLAN UNTIL IT HAS BEEN STAMPED APPROVED BY COUNCIL BUILDING CONTROL AND PLANNING DEPARTMENTS.
- (13) ALL DRAINAGE AND SEWERAGE WORKS SHALL BE SUBJECT TO THE CONDITIONS SPECIFIED ON THE SITE.
- (14) ALL CONCRETE WORK TO BE CARRIED OUT TO BS5328:1981 AND BS1282:1985.
- (10) ALL BRICKWORK TO BE CARRIED OUT TO BS5328:1973:1985.
- (15) ALL TIMBER TO BE TREATED WITH A SUITABLE PRESERVATIVE TO BS1262:1975.
- (16) ALL WORK REGARDING THIS PROJECT IS SUBJECT TO THE BCO'S APPROVAL AND SATISFACTION.
- (17) ALL STRUCTURAL WORK MUST BE INSPECTED AT THE RELEVANT STAGES BY THE STRUCTURAL ENGINEER AND/OR THE BUILDING CONTROL OFFICER, AND COMPLY WITH THEIR REQUIREMENTS.
- (18) ALL ELECTRICAL WORK IS TO COMPLY WITH ALL THE RELEVANT REGULATIONS AND STANDARDS FOR ELECTRICAL WORK. A CERTIFICATE TO BE PROVIDED ON COMPLETION OF WORK.
- (19) SITE TO BE LEFT CLEAN BY CONTRACTOR AFTER COMPLETION OF PROJECT.

- CODE 4 LEAD FLASHINGS (MIN UPSTAND 150mm & MIN 150mm SPREAD ON TILE) AND CAVITY TRAYS ARE TO BE USED WHERE INDICATED.
- DOUBLE GLAZING TO BE PROVIDED TO ALL WINDOWS TO NEW STRUCTURE, THEREFORE U-VALUE OF WALLS TO BE 0.28w/m² k AND U-VALUE OF WINDOWS TO BE 1.6w/m² k, & EXTERNAL DOOR 1.8w/m² k. (I.E. CONSTRUCTED AS INDICATED) SAFETY GLAZING TO CRITICAL LOCATIONS.
- (18) EXISTING EXTERIOR FLOORS TO BE MAINTAINED EXCEPT WHERE SPECIFICALLY NOTED OTHERWISE. EXISTING TIMBER TYPE VENTILATION IS TO BE MAINTAINED BY DUCTING FROM EXISTING VENTS WITH 100mm EARTHENWARE PIPES Laid IN HARDWARE TO NEW EXTERNAL VENTS, GIVING A MIN VENTILATION AREA EQUIVALENT TO 3000sqmm PER METER RUN – THE NEW CAVITIES SHOULD BE CONTINUOUS WITH THOSE OF THE EXISTING PROPERTY.
- INSULATED CAVITY CLOSERS TO BE PROVIDED AT ALL WINDOWS & DOOR OPENINGS.

NEW GROUND FLOOR

ALL VEGETABLE SOIL AND DELETERIOUS MATTER STRIPPED OFF SITE AND RELOCATED TO AN APPROPRIATE LOCATION. ALL HARDWARE AND COMPACT LAY 1200 GAUGE DPM AND FULLY LAP WITH DPC. ANY JOINTS IN DPM TO BE LAPPED MIN. 300mm. PROVIDE 100mm 'KINGSPAN/XTRATHERM/CELOTEX' INSULATION AS SHOWN ON SECTION. LAY MIN. 100mm CONCRETE (1:2:4:20mm AGGREGATE) SLAB FINISH SURFACE OF WITH 65mm SAND/CEMENT SCREED OR 25mm ASPHALT. EXISTING WOOD FLOOR VENTILATION: FOR VENTILATION OF EXISTING WOOD FLOOR LAY 100MM DIA PVC PIPE IN NEW GROUND FLOOR.

PROJECT
52 Slade Lane, Longsight

CLIENT
Mr. Naveed Farooq

DRAWING TITLE
Outbuilding Plan

JOB No DRAWING No
NA-P01

SCALE DATE REVISION
1:50@A2 Jan. 2024 -

t: 0782 895 3405

e: niamat@hotmail.co.uk

design