


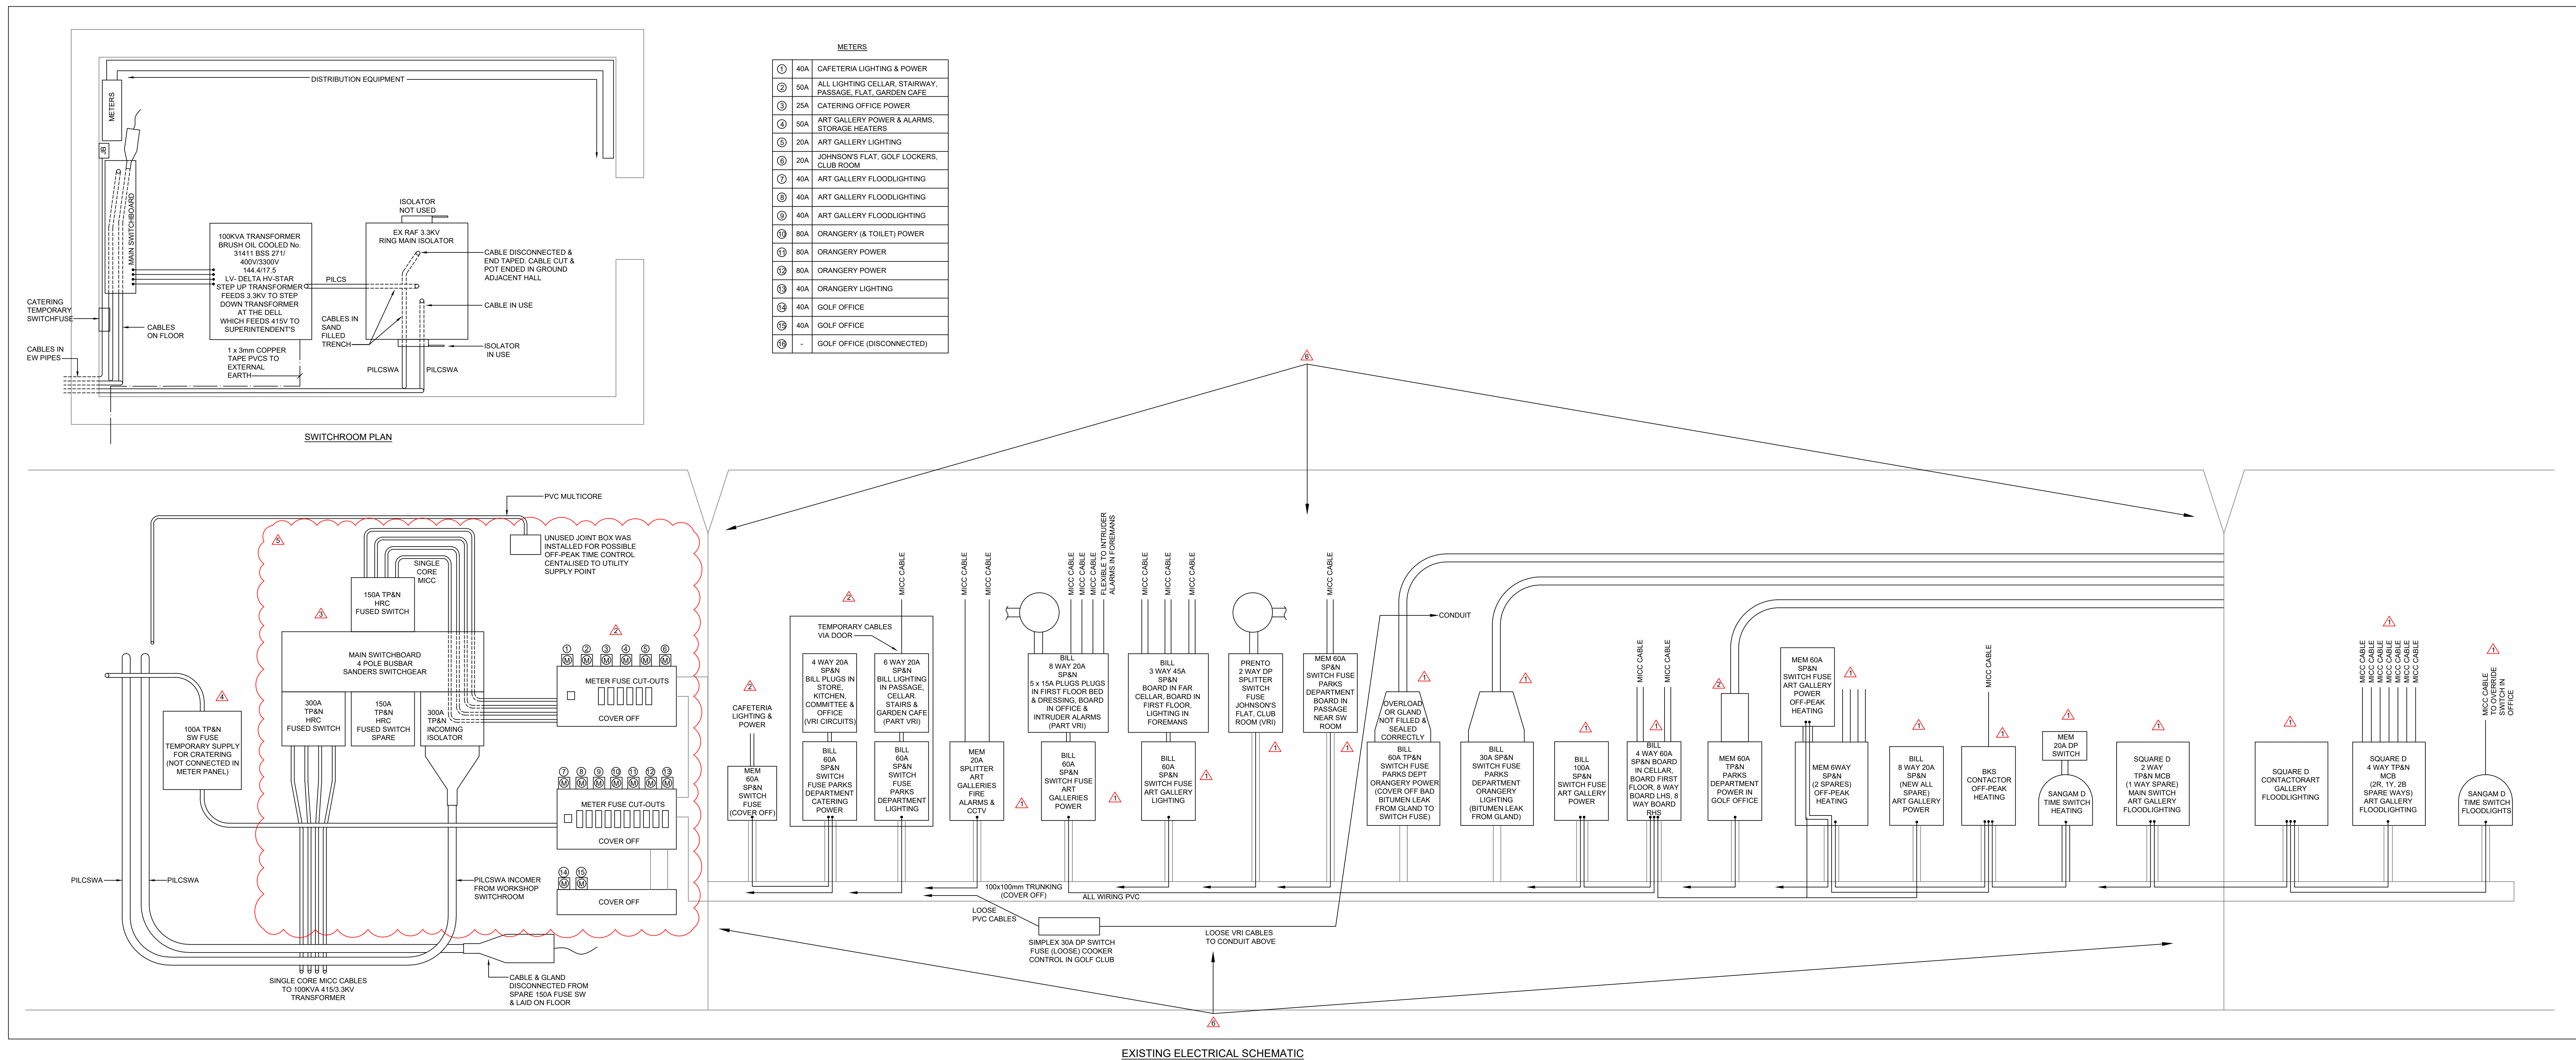

GENERAL NOTES	
1	THIS DRAWING SHALL BE READ IN CONJUNCTION WITH THE ECS MECHANICAL ENGINEERING SPECIFICATIONS.
2	THIS DRAWING IS INDICATIVE & IS INTENDED TO IDENTIFY THE PROPOSED LOCATION FOR MECHANICAL SERVICES. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE FINAL DETAILED DESIGN & COORDINATION WITH ARCHITECTURAL, STRUCTURAL & OTHER SERVICE ELEMENTS ASSOCIATED WITH THE INSTALLATION. ALL DIMENSIONS, PIPE/DUCT ROUTES & EQUIPMENT QUANTITIES ARE FOR GUIDANCE ONLY & MUST BE VALIDATED BY THE CONTRACTOR.
3	THE CONTRACTOR SHALL NOTE THIS DRAWING HAS BEEN PRODUCED USING LIMITED SITE SURVEY INFORMATION. THE CONTRACTOR SHALL INCLUDE TO CARRY OUT AN INTRUSIVE SURVEY & TO PRODUCE DRAWINGS THAT REFLECT THE INSTALLATION.
4	ALL EQUIPMENT SHALL BE INSTALLED & LOCATED TO MAINTAIN SPATIAL REQUIREMENTS TO FACILITATE ACCESS & MAINTENANCE IN LINE WITH MANUFACTURERS RECOMMENDATIONS & GOOD PRACTICE GUIDES.
5	ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS GUIDELINES.
6	DO NOT SCALE FROM THIS DRAWING.
7	ALL DETAILS ARE APPLICABLE TO EVERY DRAWING UNLESS INDICATED OTHERWISE.
8	THE CONTRACTOR SHALL INCLUDE TO IDENTIFY THE COMPLETE EXISTING MECHANICAL INSTALLATION, EXTEND & ADAPT TO FACILITATE THE PROPOSED WORKS.

DRAWING NOTES	
SYMBOL	DESCRIPTION
⚠	THE CONTRACTOR SHALL INCLUDE TO DISCONNECT, REMOVE AND REMOVE FROM SITE ALL ELECTRICAL DISTRIBUTION EQUIPMENT, CONTAINMENT AND ASSOCIATED WIRING DURING THE PROGRAMME OF WORKS.
⚠	THE CONTRACTOR SHALL INCLUDE TO TEST THE INCOMING CIRCUIT TO ASCERTAIN IF THE EXISTING CIRCUIT IS STILL IN OPERATION AND FEEDING GOLF OFFICE. JOHNSON CAETERA CONTRACTOR SHALL INCLUDE IN HIS TENDER COSTS THE COMPLETE REMOVAL OF INSTALLATION.
⚠	CONTRACTOR SHALL INCLUDE TO REMOVE THE BUSBAR CHAMBER AND ASSOCIATED FUSE SWITCHES.
⚠	CONTRACTOR SHALL INCLUDE IN HIS TENDER COST OF CONSULTING WITH ELECTRICITY NORTHWEST ON THE DISCONNECTION OF THE EXISTING INCOMING SUPPLY AND ALL RECONNECTIONS.
⚠	CONTRACTOR SHALL NOTE A PC SUM IS INCLUDED WITHIN THE TENDER FOR THE TESTING AND REMOVAL OF OLD TRANSFORMER WHICH IS NOT IN USE WITHIN THE ELECTRICAL SWITCH ROOM IN THE BASEMENT.
⚠	THE PRINCIPAL CONTRACTOR FOR THE DEVELOPMENT OF THE ORANGERY BUILDING SHALL NOTE THAT THE MAIN HEATON HALL BUILDING IS BEING FULLY ELECTRICALLY REWIRED AND ALL EXISTING DISTRIBUTION BOARDS AND SUB MAINS WILL BE REPLACED BY THE PRINCIPAL CONTRACTOR FOR THIS PROJECT.

13	INFORMATION ISSUE	G.M.	Feb. 2024
12	INFORMATION ISSUE (PLANNING)	G.M.	Feb. 2024
11	INFORMATION ISSUE	G.M.	Jan. 2024
Rev.	Description	Revised By	Date

STATUS

INFORMATION



Building Services Consulting Engineers

148 Shropshire Road
Chesham, Chesham, Bucks HP8 2DP
Tel: 01451 292 285 Fax: 01451 292 285
Web Site: www.ecs-ecs.co.uk Email: sales@ecs-ecs.co.uk

JOB NO.	DRAWING NO.	COMPUTER FILE	REVISION
24/100/OR	24/100/OR/E/0924_100_OR_E_09	13	
DATE	SCALE	DRAWN	CHECKED
Jan. 2024	1:50 @ A0	G.P.	G.M.

JOB TITLE	Heaton Park Hall Orangery Building	CfA ISO 9001 CERTIFIED
-----------	---------------------------------------	------------------------------

PROJECT FILE	Existing Electrical Schematic	ace
--------------	----------------------------------	-----