

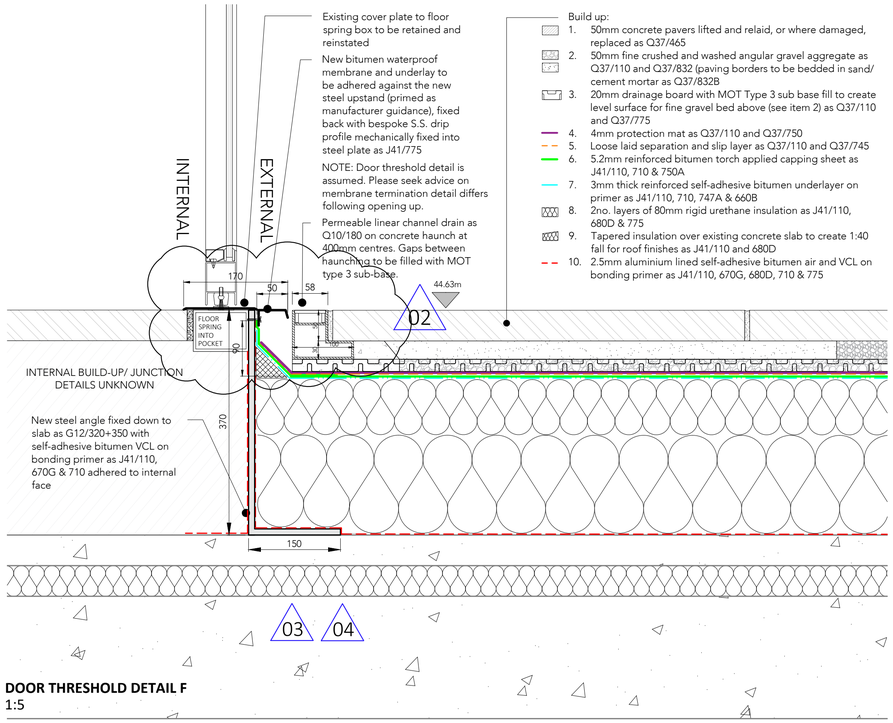


DOOR THRESHOLD DETAIL F
1:5

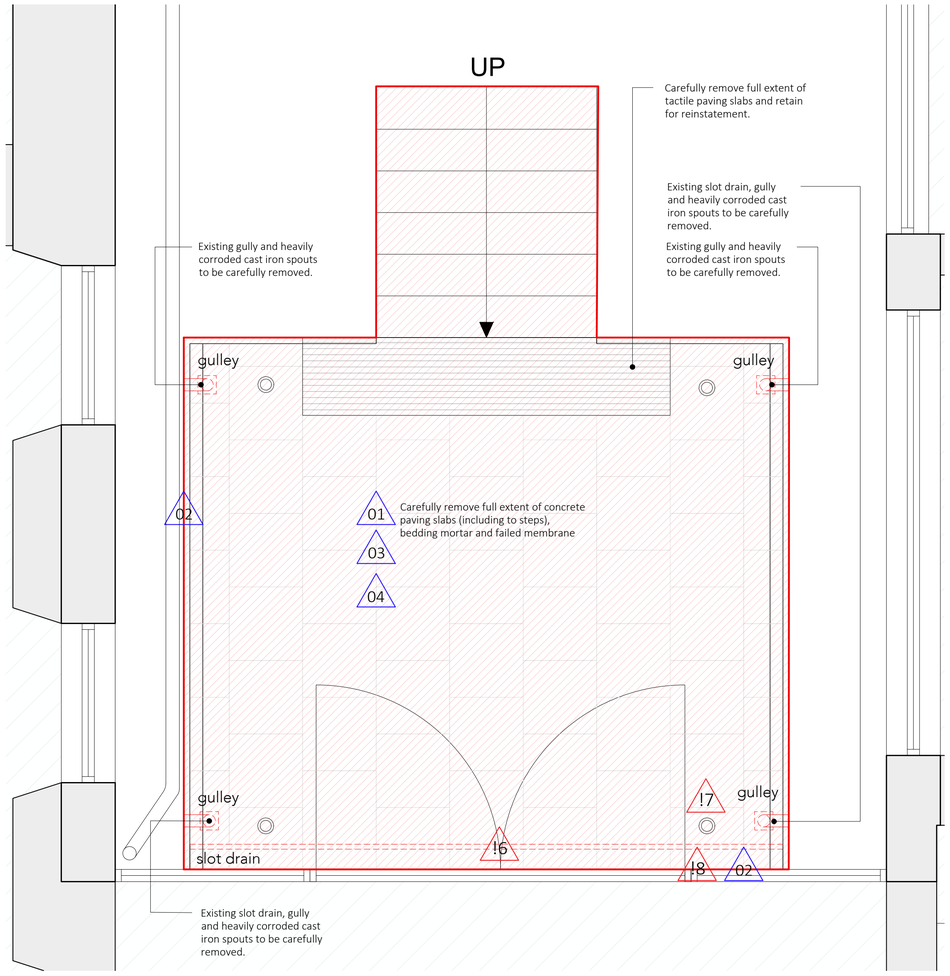

ALTERATIONS PLAN OF ATRIUM FIRE EXIT
1:25


For details A, B, C, D and E refer to drawing MAG-BUT-01-00-DR-A-90-0002

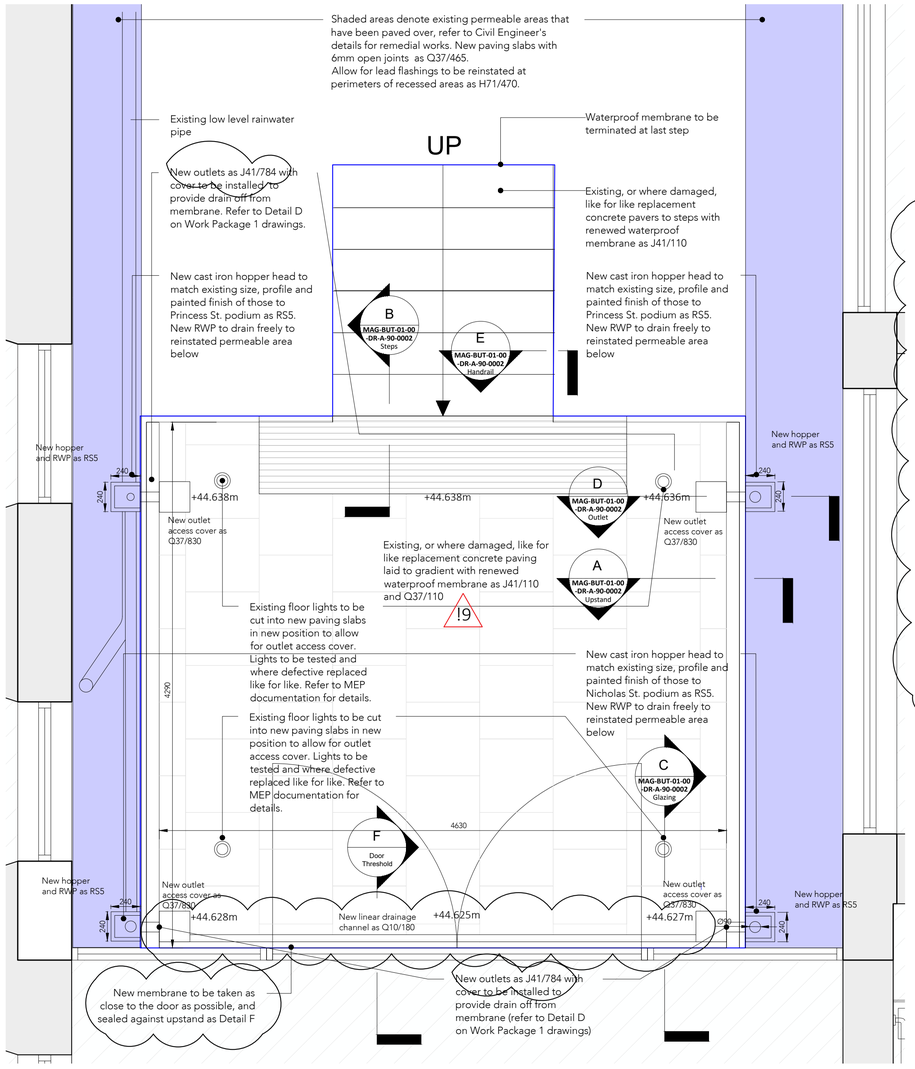

PROPOSED PLAN OF ATRIUM FIRE EXIT
1:25

Note:
Do not scale from this drawing.
Dimensions are to be checked on site.
If in doubt please ask.

KEY PLAN

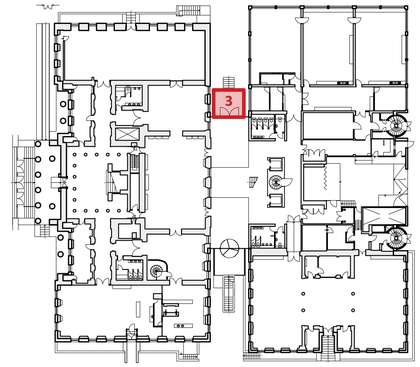

KEY

Area within scope of works
Area outside scope of works

N

Design Notes

01 Concrete paving slabs to be retained where possible and not damaged during the lifting process, and otherwise replaced like for like as Q37/465

02 Ensure sufficient protection is in place to in-situ atrium glazing and glass balustrades.

03 Slab level and depth is assumed based on archival information and localised opening up works. Further investigation on site is required to validate and details to be amended as required.

04 Structure to be inspected once exposed, associated repair works if required TBC.

CDM Regulations 2015

To be read in conjunction with Designer's Hazard and Risk register (MAG-BUT-00-ZZ-HS-A-XX-0001). Correlating risk numbers are shown in brackets:

11 Risk of asbestos exposure during demolition works. R&D survey to be undertaken and recommendations of abestos surveyor's report adhered to. Any suspected ACMs discovered during works to be reported (0.6)

12 Risk of overlap with users/members of the public. Phasing of works and possession of site to be agreed to restrict public access to working areas (0.3)

13 Noise disturbance - risk of causing hearing impairment and nuisance noise to site personnel / staff / visitors (0.8)

14 Dust - risk of causing ill health to site personnel / staff / visitors within the vicinity of the site (0.9)

15 Risk of injury moving materials. Manual handling to be kept to a minimum, workers to use hoists to transport materials to and from ground level (0.10)

16 Existing fire exit doors / method of escape temporarily taken out of use. Temporary fire exit to be provided whilst doors are out of use (1.2)

17 Live services - existing electrical equipment in vicinity of works (1.4)

18 Works taking place adjacent to glazing - risk of broken glass and injury (1.5)

19 Hot works - waterproofing system includes bitumen torch applied capping sheet. Provide necessary fire fighting equipment and follow guidance in National Federation of Roofing Contractors 'Safe2Torch' document.

General Notes

1. For references and descriptions to work items, refer to separate Architectural Specification 9518NBS and Architectural Restoration Specification document 9518RS. Any works package is presented in numbered form.
2. All dimensions must be checked on site before proceeding. Dimensions of new work are to be adjusted to suit the existing where necessary. Do not assume that the existing structure or details are plumb, square or level.
3. Any discrepancies to be brought to the Architects attention as soon as possible.
4. Sizes of drainage channels, gullies, hoppers and pipes are approximate, to be confirmed on site.
5. FFL for paving are to be retained as existing. Site levels are based on topographical survey information produced by PowersUK Ltd, July 2023.

Rev	Date/Intls	Details
P06	13/11/23 HB	Stage 4 issue: Amendments: Channel drain spec. incl. width, door threshold detail, outlets note, CDM notes added
P05	21/09/23 HB	Stage 4 issue: amended as comments
P04	05/09/23 HB	Stage 4 issue: Proposed Build Up Amended as Bauder Specification
P03	21/07/23 HB	Stage 4 issue: RCG comments addressed
P02	14/07/23 HB	Stage 4 issue
P01	31/05/23 HB	Stage 3 issue

© The moral rights of the author are hereby asserted.
This drawing and design is the sole property of Buttress Ltd and must not be reproduced without permission.
Buttress Ltd is Registered in England and Wales: 5363573

MANCHESTER CITY COUNCIL

Buttress
41 Bengal St
Manchester
M4 6AF
T 0161 236 3303
E contact@buttress.net
W www.buttress.net

Project Title	Manchester Art Gallery
Client	Manchester City Council
Location	Mosley Street, Manchester
Drawing Title	WP3 Ground Floor Atrium Fire Exit Waterproofing Plans
Date	31/05/23
Checked	EK
Scale	Varies
Orig Paper Size	A1
Status	**Preliminary**

Project: Origin: Zone: Level: Type: Disc: Code: Number: Rev:
MAG - BUT - 03 - 00 - DR - A - 90 - 0001 P06