Note: SFS and sub structure drawn indicatively.
Site survey required to confirm accuracy and suitability of components of the substructure.

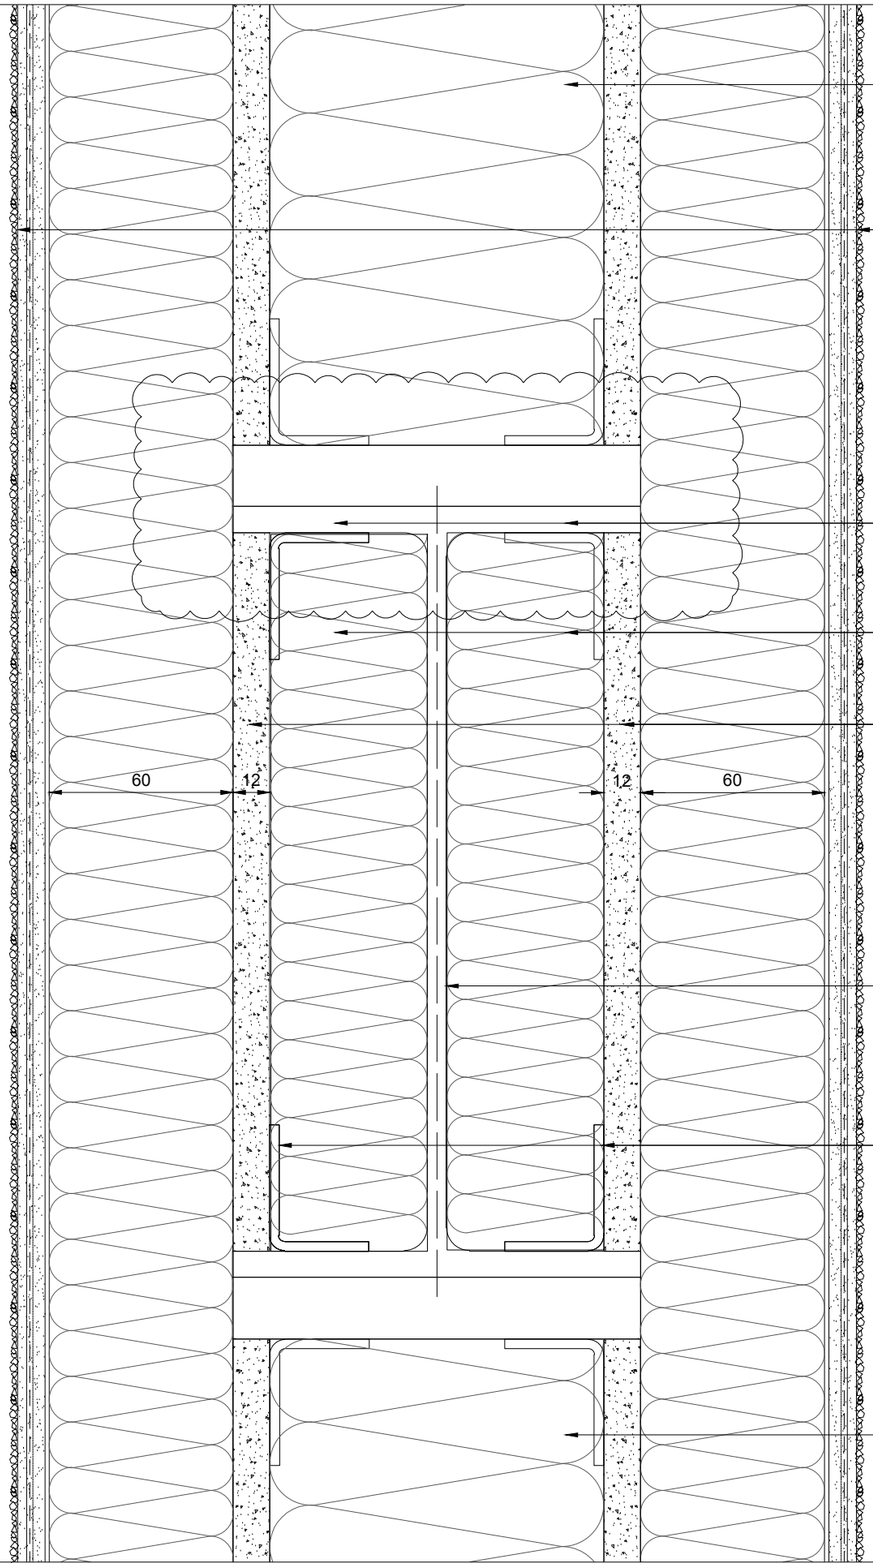

100mm Rockwool Mineral fiber insulation tightly packed to fill SFS void

Wetherby Stone Wool Silicone External Wall Insulation System:
- WBS Insulation Bedding Adhesive.WBS Insulation Board 60mm x 1200mm. Board fixed micanically amnd with adhesive. 2no. insulation fixing per board tit/FiN Washer and 90mm TKR Screw or suitable alternative.
- WBS Heck K +A Scrim Adhesive
- WBS alkali resistant scrim cloth
- WBS Scrim adhesive leveling minimum 2-3mm
- WBS Silicone primer
- WBS silicone finish coat: Heck Siliconr 'K' 1.5mm textured Finish

Gap to be investigated/ confirmed on site.

100mm Rockwool Mineral fiber insulation tightly packed to fill SFS void

12mm STS Constuction Board - No Ply
Fixed to SFS using a Self Drilling Countersunk 4.8Ø x 38mm stainless steel screw.

Existing Steel

SS Brackets installed to steel to support CP board.
Fixing and size TBC

100mm Rockwool Mineral fiber insulation tightly packed to fill SFS void

APPROVAL

F A C A D E S

Novo Facades LTD
74 Broadway
Peterborough
PE11SU
Tel 01733 639020
www.novofacades.co.uk

01.12.2023 - P2

Architects Returned Drawing Status ☐ STATUS A ☐ STATUS B ☐ STATUS C

GENERAL NOTES:
DIMENSIONS ARE FOR INSTALLATION PURPOSES ONLY.
SITE DIMENSIONS MAY VARY. ANY DIMENSIONS ARE TO BE CONFIRMED ON SITE.

Project Title	Design House	**Drawing Title**		**Scale**	1:2@A3
Location	M4 1HS	Typical Buttress Section Detail		**Drawn by**	NS **Date** 30.05.2023
				Checked by	MM **Date**
		Drawing No	NV369-DRG-SUB-D2104 **Rev** P2		Sheet 01 of 01