


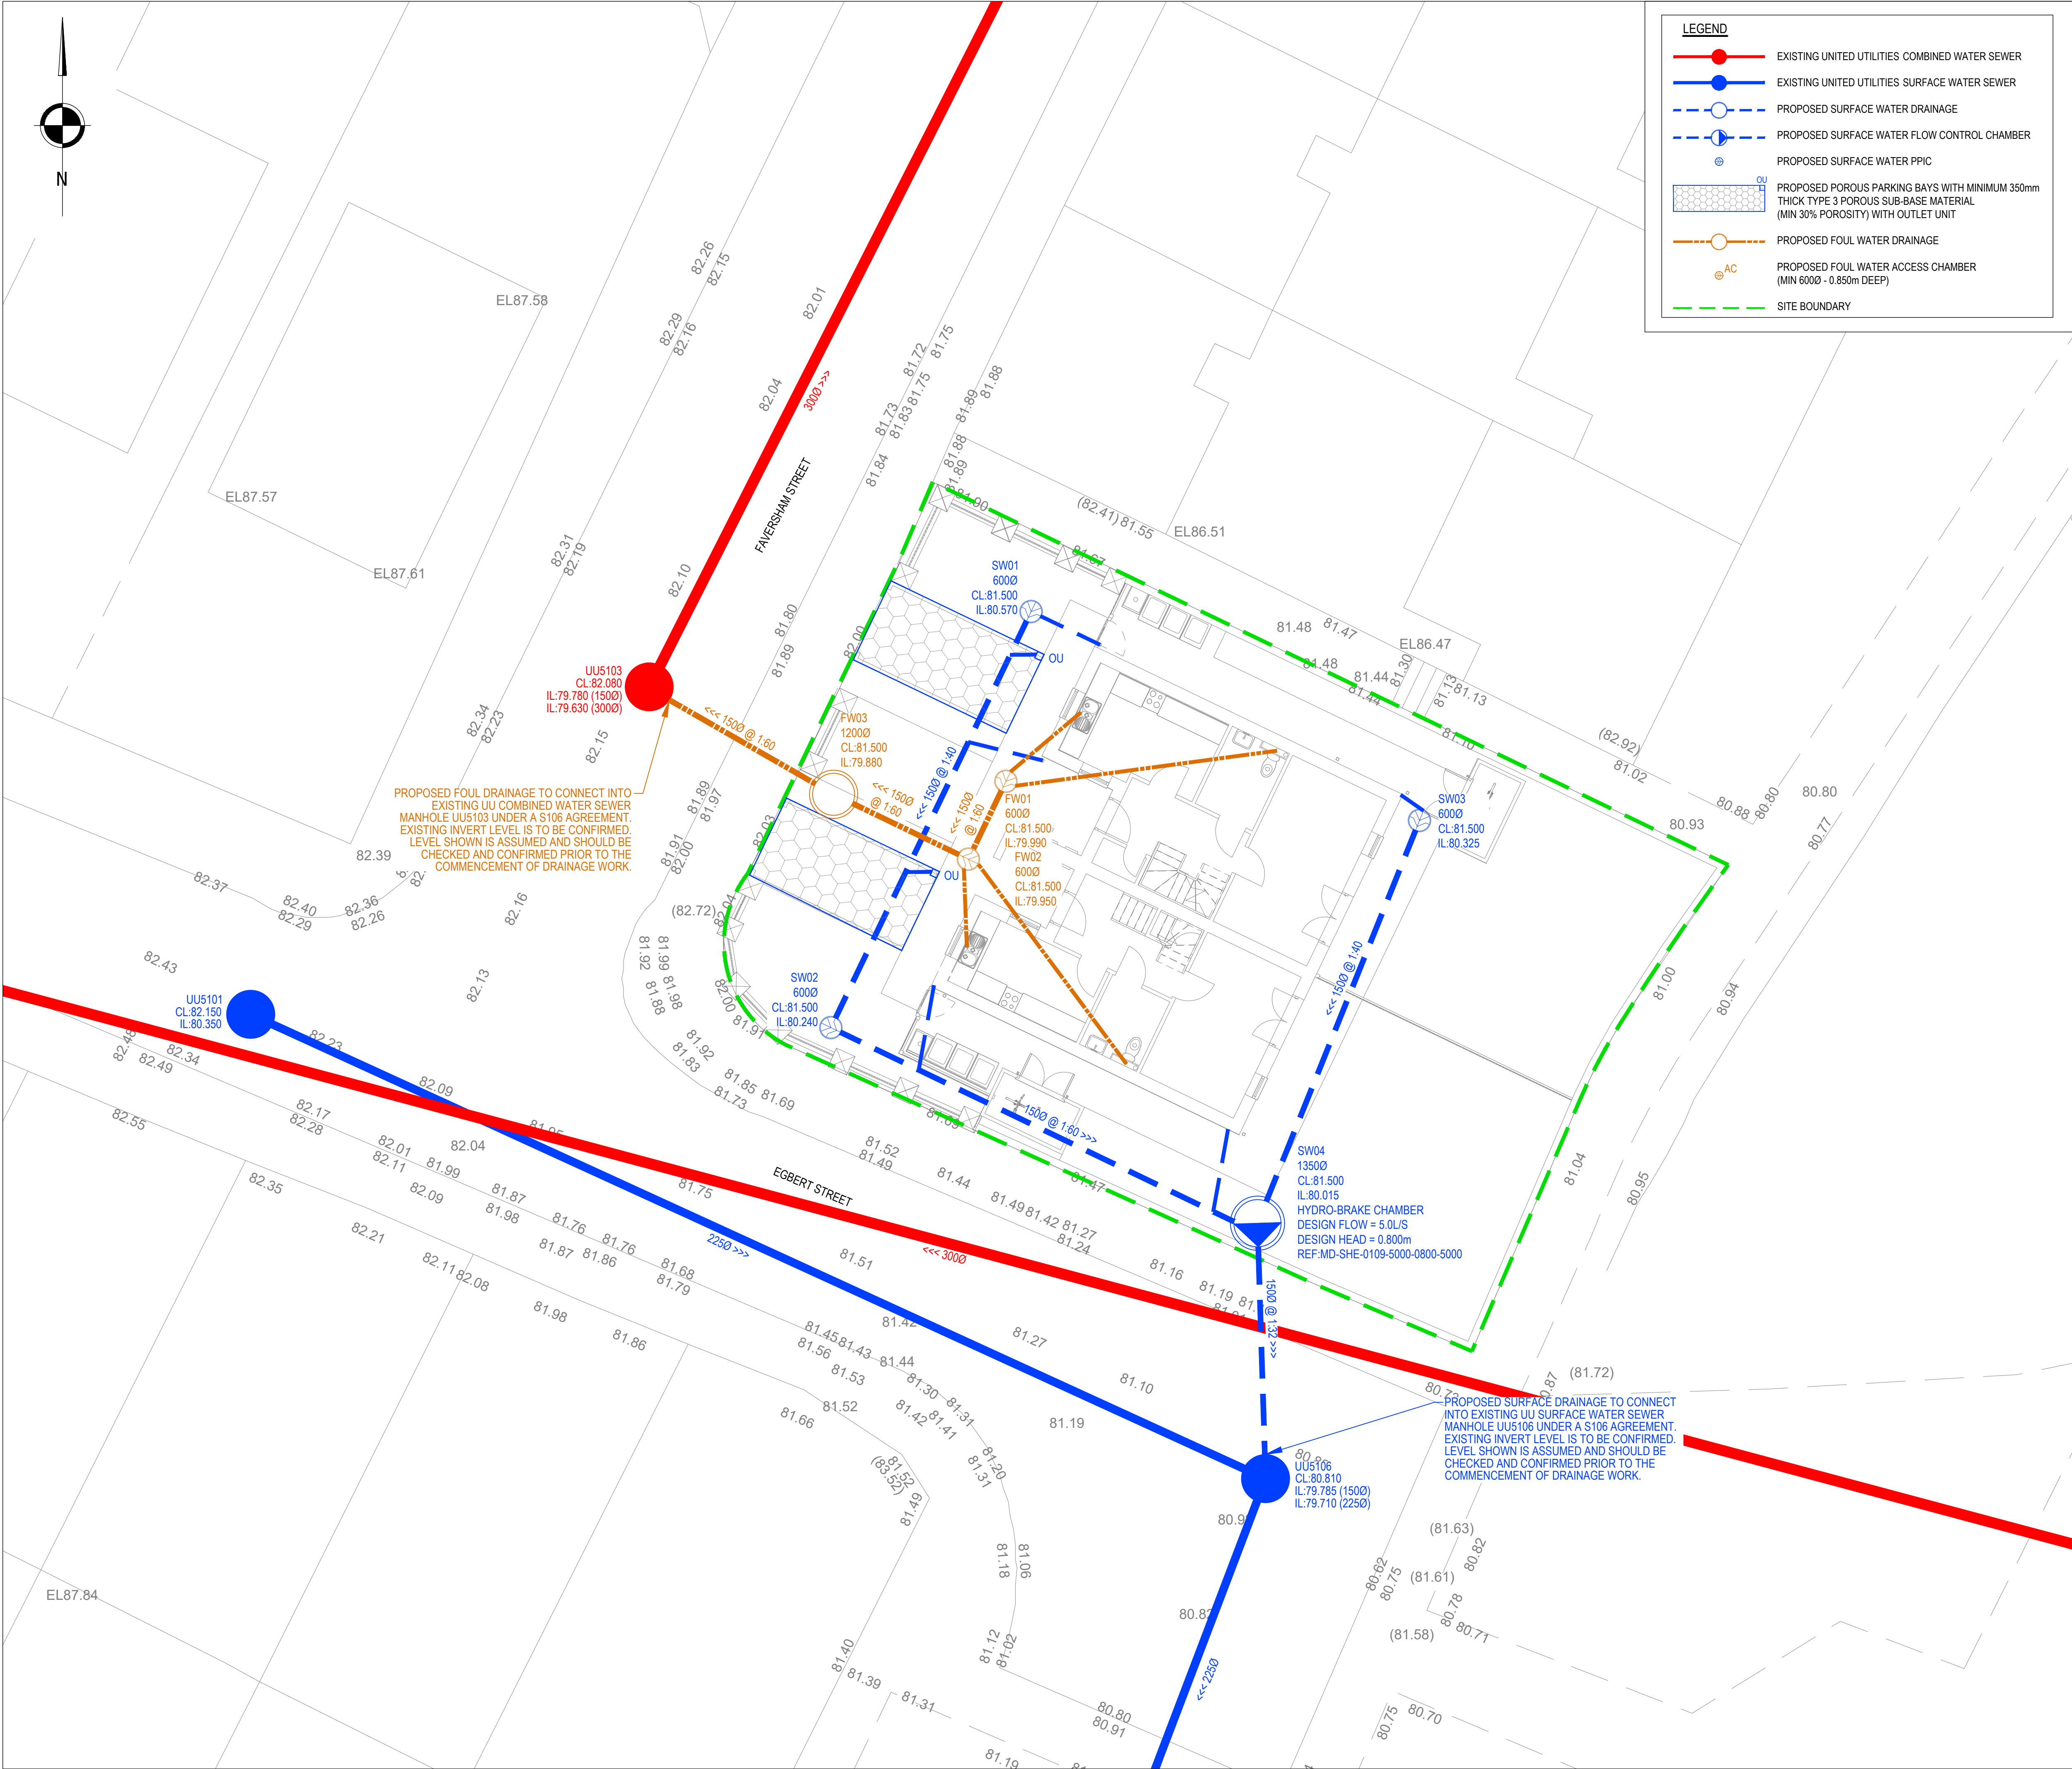

LEGEND

- EXISTING UNITED UTILITIES COMBINED WATER SEWER
- EXISTING UNITED UTILITIES SURFACE WATER SEWER
- PROPOSED SURFACE WATER DRAINAGE
- PROPOSED SURFACE WATER FLOW CONTROL CHAMBER
- PROPOSED SURFACE WATER PPIC
- PROPOSED POROUS PARKING BAYS WITH MINIMUM 350mm THICK TYPE 3 POROUS SUB-BASE MATERIAL (MIN 30% POROSITY) WITH OUTLET UNIT
- PROPOSED FOUL WATER DRAINAGE
- PROPOSED FOUL WATER ACCESS CHAMBER (MIN 6000 - 0.850m DEEP)
- SITE BOUNDARY

- GENERAL NOTES**
- THIS DRAWING TO BE READ IN CONJUNCTION WITH ALL RELEVANT ENGINEERS, ARCHITECTS AND SPECIALISTS DRAWINGS AND SPECIFICATIONS.
 - ALL RELEVANT DIMENSIONS TO BE OBTAINED/CHECKED AGAINST ARCHITECT'S DRAWINGS AND BY SITE MEASUREMENT PRIOR TO THE COMMENCEMENT OF WORKS OR ORDERING OF MATERIALS. DISCREPANCIES BETWEEN THE DRAWINGS AND SITE CONDITIONS TO BE NOTIFIED TO THE ENGINEER.
 - DO NOT SCALE FROM THIS DRAWING.
 - THE CONTRACTOR IS RESPONSIBLE FOR THE LOCATION OF ALL UNDERGROUND SERVICES THAT MAY EXIST AND TO DIVERT THEM IF NECESSARY PRIOR TO THE COMMENCEMENT OF THE WORKS.
 - MATERIALS OR WORKMANSHIP NOT COMPLYING WITH THE ENGINEERS DRAWINGS AND SPECIFICATION SHALL BE DEEMED UNACCEPTABLE AND REMOVED FROM SITE AND REPLACED WITH WORK CORRECTLY MANUFACTURED, DELIVERED AND ERECTED.
 - ALL EXISTING INVERT LEVELS TO BE CHECKED BY THE CONTRACTOR AT THE START OF WORKS AND ANY OTHER DISCREPANCIES NOTIFIED TO THE ENGINEER. ALL LEVELS ARE BASED ON TOPOGRAPHICAL SURVEY INFORMATION PROVIDED BY OTHERS.
 - ALL OPENING NOTICES ETC. AS REQUIRED UNDER HIGHWAYS ACTS ETC. ARE TO BE OBTAINED PRIOR TO COMMENCEMENT OF WORKS. ALL WORKS ARE TO BE INSPECTED BY L.A., NHBC OR UNITED UTILITIES AS APPLICABLE.
 - ALL MATERIALS TO BEAR THE RELEVANT B.S. KITEMARK AND COMPLY FULLY WITH THE SPECIFICATIONS. ALL CONCRETE & CONCRETE PRODUCTS MUST USE SULPHATE RESISTANT CEMENT (UNLESS THE SITE INVESTIGATION REPORT PROVES THAT SULPHATE ATTACK FROM SOILS AND GROUNDWATER WILL NOT OCCUR TO WITHSTAND A CLASS 3 CONDITION).
 - WHERE "ULTRA RIB" UPVC PIPES (OR SIMILAR APPROVED) ARE USED IN ADOPTABLE DRAINAGE THEY SHALL STILL BE HANDLED AND LAID IN ACCORDANCE WITH THE SPECIFICATION AND GUIDANCE ISSUED BY THE HIGH PERFORMANCE PIPE ASSOCIATION. A CLASS S BED AND SURROUND MUST BE USED FOR SUCH PIPES.
 - TRENCH BACKFILL IN HIGHWAYS / CAR PARKS TO WITHIN 1M OF HIGHWAY SHALL BE A SUITABLE GRANULAR MATERIAL ALL IN ACCORDANCE WITH SEWERS FOR ADOPTION CL 3.3.4. BACKFILL MATERIAL IN OTHER AREAS SHALL BE SELECTED EXCAVATED MATERIAL FREE FROM STONES LARGER THAN 40MM, LUMPS OF CLAY OVER 100MM, TIMBER, FROZEN MATERIAL OR VEGETABLE MATTER.
 - UPVC PIPES AND FITTINGS SHALL COMPLY WITH WIS 4-35-01. CLAY PIPES AND FITTINGS SHALL BE EXTRA STRENGTH TO BSEN 295 AND BS 65. CONCRETE PIPES AND FITTINGS SHALL COMPLY WITH BS 5911, PIPES SHALL BE CLASS H.
 - A CLASS S BED MUST BE PROVIDED TO UPVC PIPES, A CLASS B BED MAY BE USED FOR V.C. AND CONCRETE PIPES.
 - BACKFILL TO DRAINAGE TRENCHES ABOVE PIPE BEDDING AND SURROUND WITHIN ROAD AND CAR PARK AREAS TO BE GRANULAR FILL COMPLYING WITH CLASS 6F2 OR DOT TYPE 1 OR QUARRY SCALPING GRADED FROM 75mm DOWN.
 - A CONCRETE SURROUND IS NOT NORMALLY REQUIRED TO MANHOLES UNLESS INSTALLED IN AREAS OF UNSTABLE GROUND. UNDER CONDITIONS OF FLOATATION OR WHERE SUBJECTED TO EXCEPTIONAL OR ECCENTRIC LOADS, IN WHICH CASE A 150mm SURROUND OF AT LEAST 20N/mm² CONCRETE SHOULD BE PROVIDED. ANY JOINTS SHOULD BE STAGGERED WITH THE PRECAST CONCRETE JOINTS.
 - DOUBLE STEPS SHALL BE PLASTIC ENCAPSULATED CARBON TO BS EN 1247-2 MANHOLE STEPS. STEP IRONS AT 300ctrs. HORIZONTALLY & VERTICALLY MAY BE USED AS AN ALTERNATIVE TO DOUBLE STEPS.
 - ALL WORK TO BE IN ACCORDANCE WITH DESIGN AND CONSTRUCTION GUIDANCE VERSION 2.2 AND UNITED UTILITIES WATER PLC'S STANDARD CONSTRUCTION DETAILS.
 - TOP OF FOUNDATIONS ARE TO BE A MIN 750mm FROM FINISHED EXTERNAL LEVELS.
 - FOUNDATIONS WITHIN CLOSE PROXIMITY TO PROPOSED DRAINAGE WILL NEED TO BE AT THE SAME DEPTH AS DRAINAGE TO AVOID THE POTENTIAL FOR UNDERMINING.
 - MINIMUM COVER TO DRAINAGE SOFFIT LEVEL:

LANDSCAPING	TRAFFICKED AREAS	HIGHWAYS
0.600m	0.900m	1.200m
 - CLASS 'S' BEDDING AND SURROUND TO BE USED WHERE MINIMUM COVER IS ACHIEVED.
 - WHERE MINIMUM COVER IS NOT ACHIEVED CLASS 'Z' BEDDING AND SURROUND (CONCRETE ENCASEMENT) IS TO BE USED

- DRAINAGE NOTES**
- FOUL AND SURFACE WATER CONNECTIONS ARE TO BE CONFIRMED
 - ALL POP-UP SETTING OUT IS TO BE PROVIDED BY THE ARCHITECT
 - ALL SURFACE / FOUL WATER CONNECTIONS ARE TO HAVE RODDABLE ACCESS FROM ABOVE GROUND
 - ANY 6000 ACCESS CHAMBERS GREATER THAN 1.2m DEEP WILL REQUIRE A REDUCED ACCESS SHAFT
 - ALLOW FOR 1 NUMBER OF RAINWATER BUTTS TO ALL PLOTS

P01	20.11.2023	PRELIMINARY ISSUE		JJR	JP	KOB
REV	DATE	DESCRIPTION		BY	CHK	APP

DRAWING STATUS: **PRELIMINARY**

CLIENT: ONE MANCHESTER

ARCHITECT: BTP ARCHITECTS

PROJECT: P500 MOSTON
EGBERT STREET

TITLE: DRAINAGE STRATEGY

STATUS:	PROJECT No:	PROJECT	ORIGINATOR	VOL/SYS/LEVEL	TYPE	ROLE	DRAWING No:	REV:
S2	222-100	ESM - AJP	-ZZ - 00 -DR -	C - 0900	P01			

SCALE @ A1:	DESIGNED:	DRAWN:	CHECKED:	APPROVED:	DATE:
1:100	JJR	JJR	JP	KOB	NOV 23

AJP consulting engineers
0151 227 1462 info@ajptd.co.uk 1 Dale Street, Liverpool, L2 2ET