

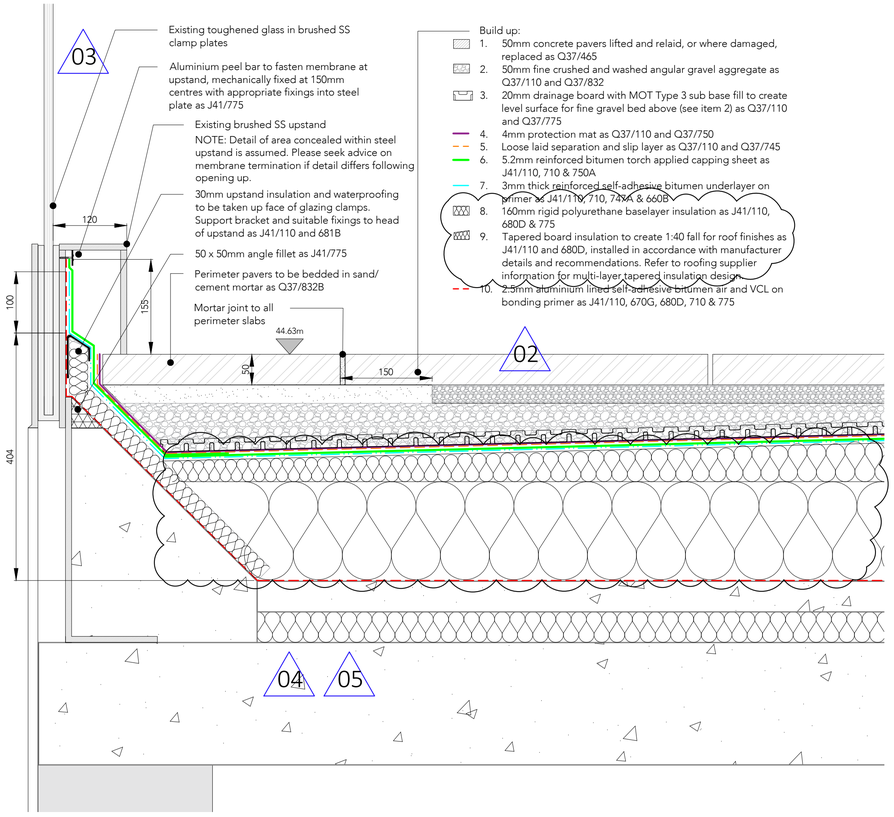



TYPICAL UPSTAND DETAIL A
1:5

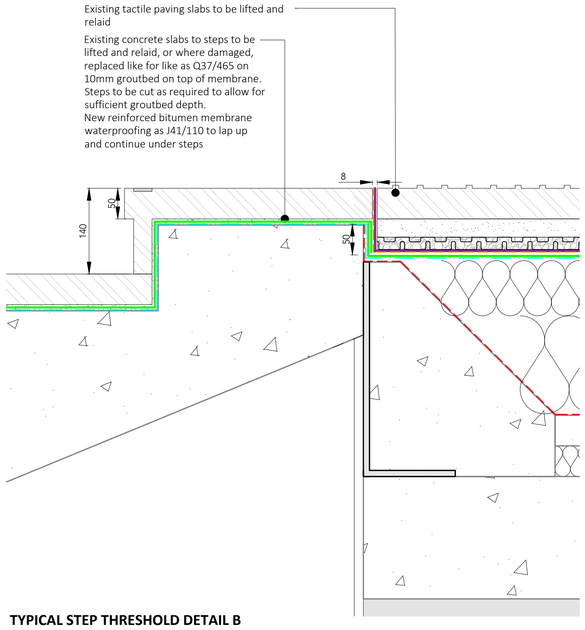


TYPICAL STEP THRESHOLD DETAIL B
1:5

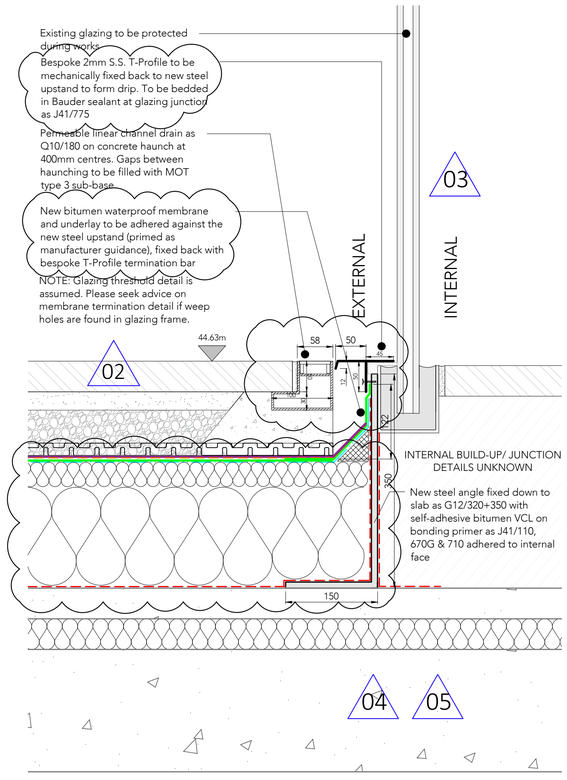


TYPICAL GLAZING THRESHOLD DETAIL C
1:5

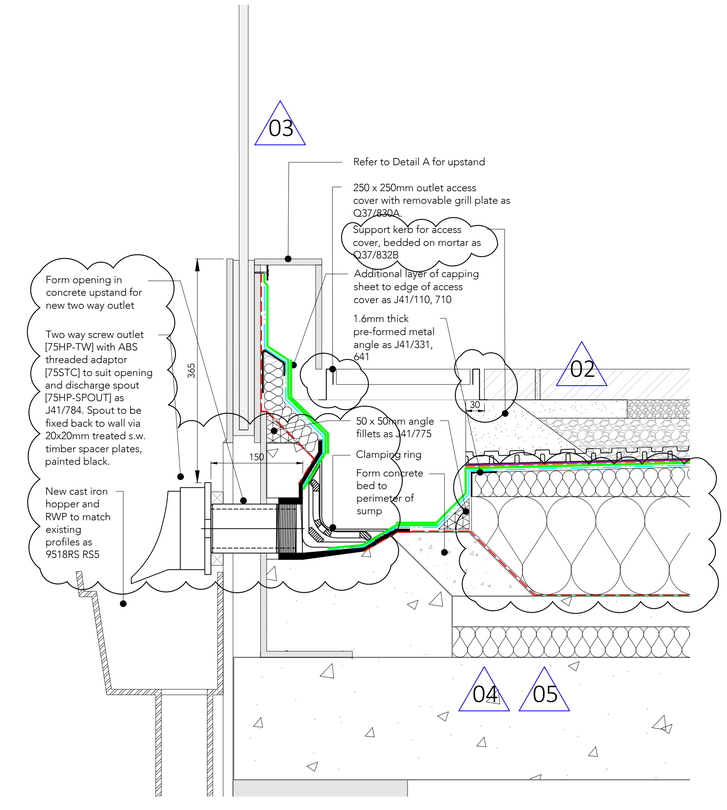

PARAPET OUTLET DETAIL D
1:5

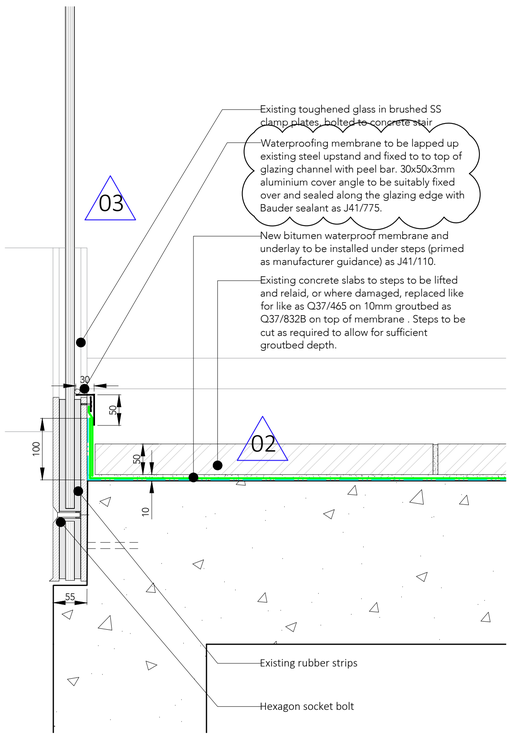


HANDRAIL DETAIL E
1:5

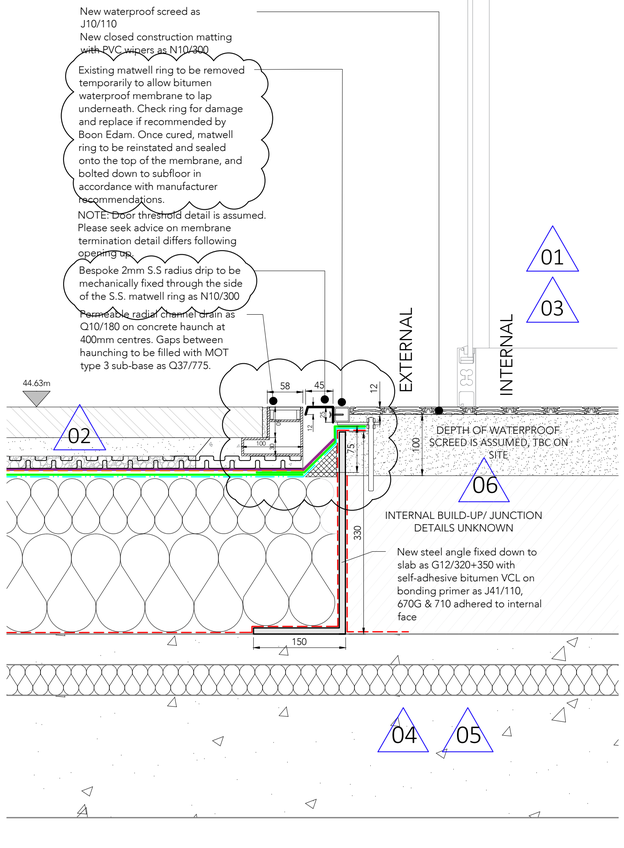

REVOLVING DOOR THRESHOLD DETAIL F
1:5

Note:
Do not scale from this drawing.
Dimensions are to be checked on site.
If in doubt please ask.

KEY PLAN

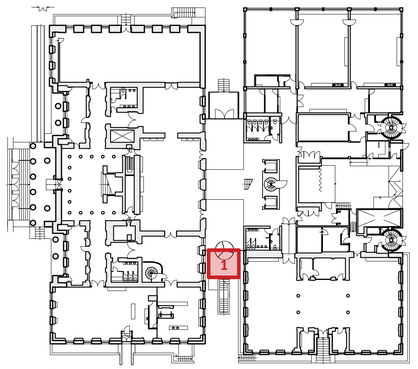

General Notes
1. For references and descriptions to work items, refer to separate Architectural Specification 9518NBS and Architectural Restoration Specification document 9518RS. Any works item is presented in numbered form.
2. All dimensions must be checked on site before proceeding. Dimensions of new work are to be adjusted to suit the existing where necessary. Do not assume that the existing structure or details are plumb, square or level.
3. Any discrepancies to be brought to the Architects attention as soon as possible.
4. Sizes of drainage channels, gullies, hoppers and pipes are approximate, to be confirmed on site.

Design Notes

01 The following remediation works are proposed for the Revolving Door, design/ specification by Boon Edam:
- Seals to roof to be renewed
- Defective lamps to be replaced
- New horse hair brush strips to doors
- New matwell ring if required

Please refer to Boon Edam report (ref. 4308936) for further details.

02 Concrete paving slabs to be retained where possible and not damaged during the lifting process, and otherwise replaced like for like as Q37/465

03 Ensure sufficient protection is in place to in-situ atrium glazing and glass balustrades.

04 Slab level and depth is assumed based on archival information and localised opening up works. Further investigation on site is required to validate and details to be amended as required.

05 Structure to be inspected once exposed, associated repair works if required TBC.

06 Base ring of the revolving door to be inspected once exposed, associated repair works if required TBC.

Rev	Date/Intls	Details
P06	13/11/23 HB	Stage 4 issue - Amendments: Screed replaced with tapered insulation, channel drain spec incl. width, lead chute replaced with proprietary two-way outlet, matwell ring and drip detail, access cover detail
P05	22/09/23 HB	Stage 4 issue - amended as RCG comments
P04	21/09/23 HB	Stage 4 issue - amended as comments
P03	05/09/23 HB	Stage 4 issue - Proposed build up amended as Bauder Specification
P02	21/07/23 HB	Stage 4 issue - RCG comments addressed
P01	14/07/23 HB	Stage 4 issue

© The moral rights of the author are hereby asserted.
This drawing and design is the sole property of Buttress Ltd and must not be reproduced without permission.
Buttress Ltd is Registered in England and Wales: 5363573

MANCHESTER CITY COUNCIL

Buttress
41 Bengal St
Manchester
M4 6AF
T 0161 236 3303
E contact@buttress.net
W www.buttress.net

Project Title	Manchester Art Gallery
Client	Manchester City Council
Location	Mosley Street, Manchester
Drawing Title	WP1 Ground Floor Atrium Revolving Doors Waterproofing Details
Date	31/05/23
Checked	EK
Scale	1:25
Orig Paper Size	A1
Status	**Preliminary**

Project:	Origin:	Zone:	Level:	Type:	Disc:	Code:	Number:	Rev:
MAG	BUT	01	00	DR	A	90	0002	P06