





A Proposed Section  
PL-3.00

B Proposed Section  
PL-3.00

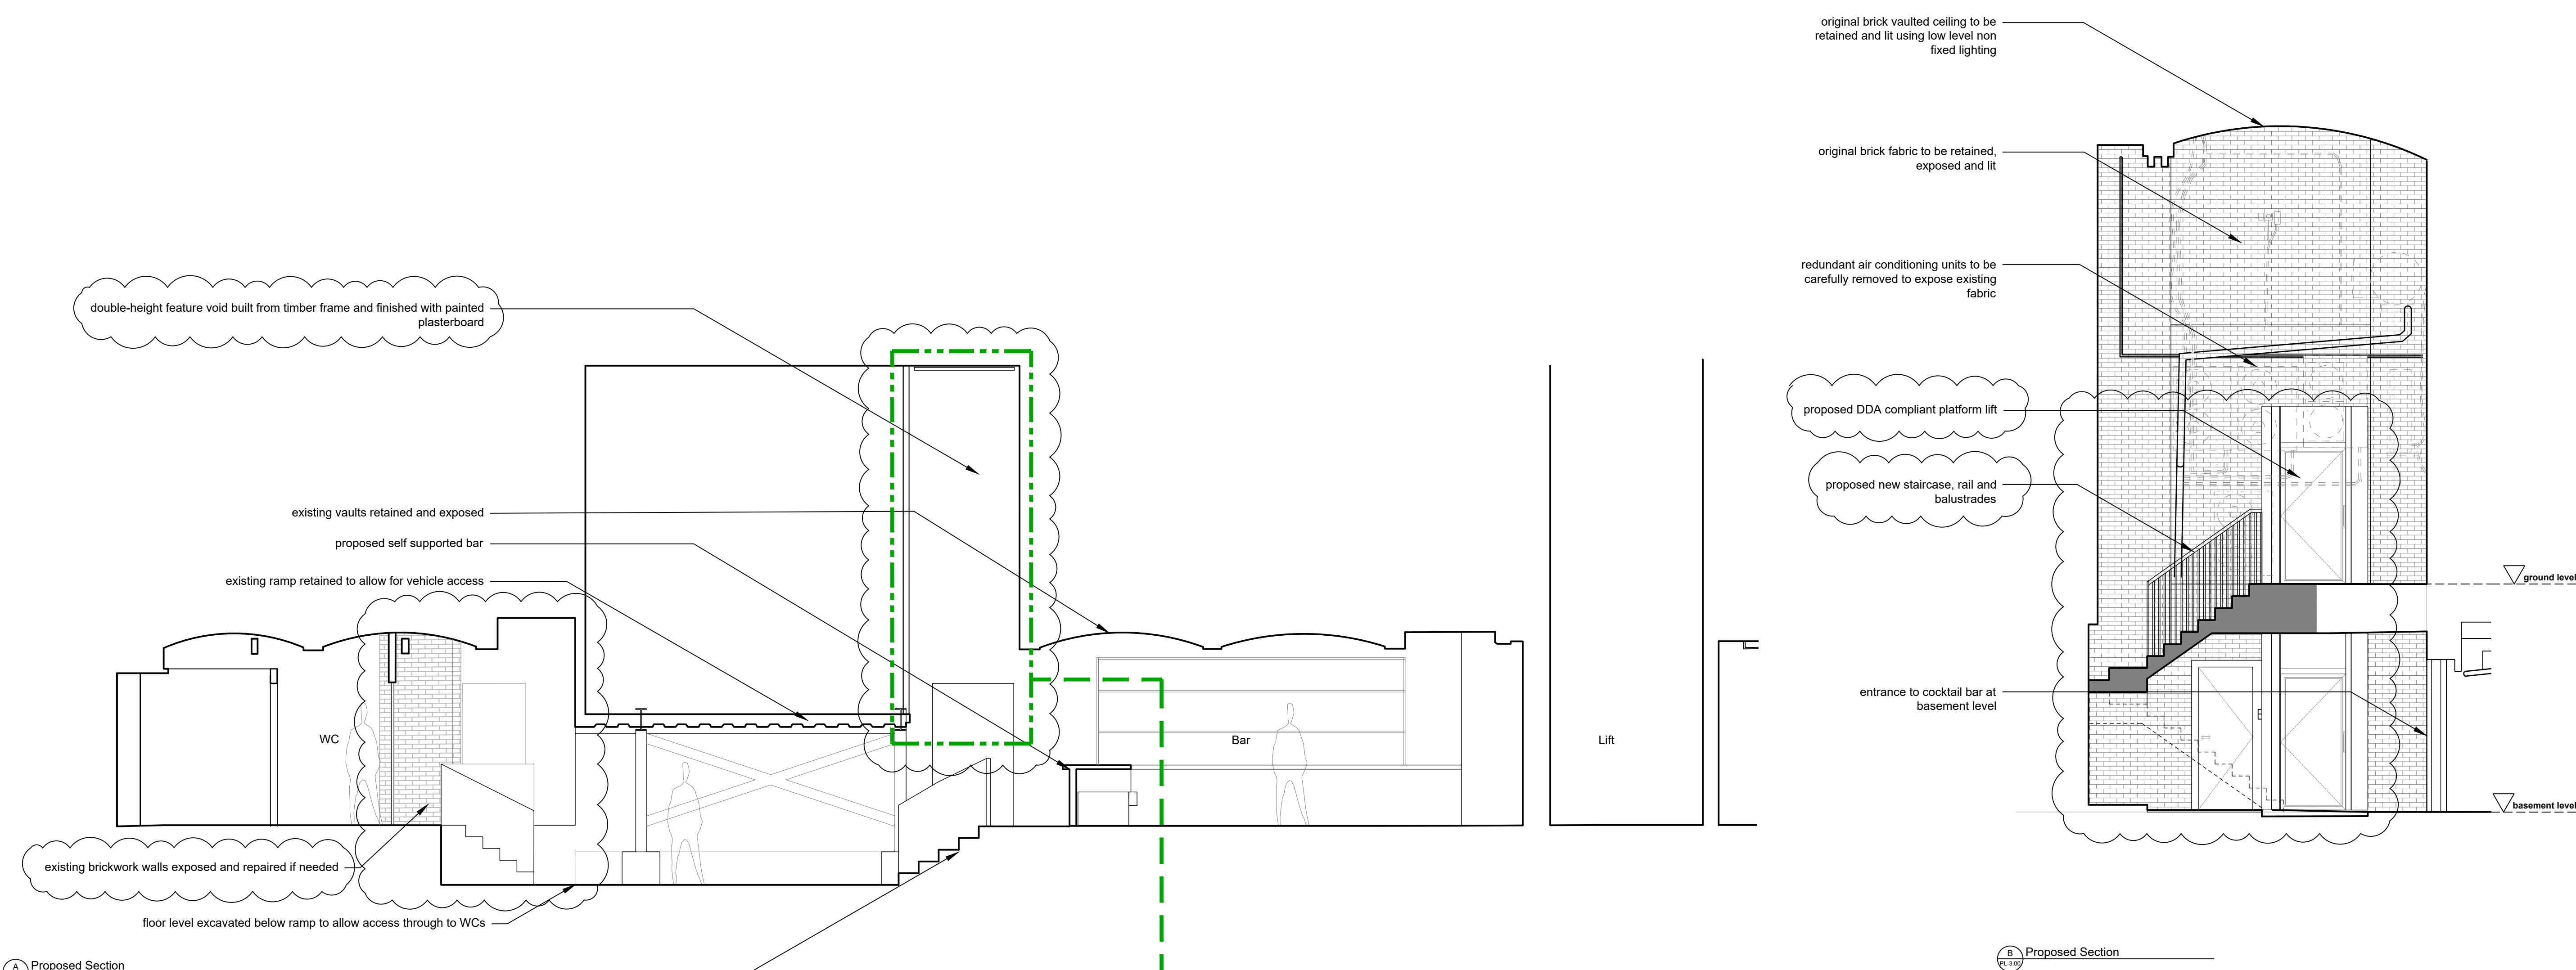

01 Existing Void  
PL-3.00

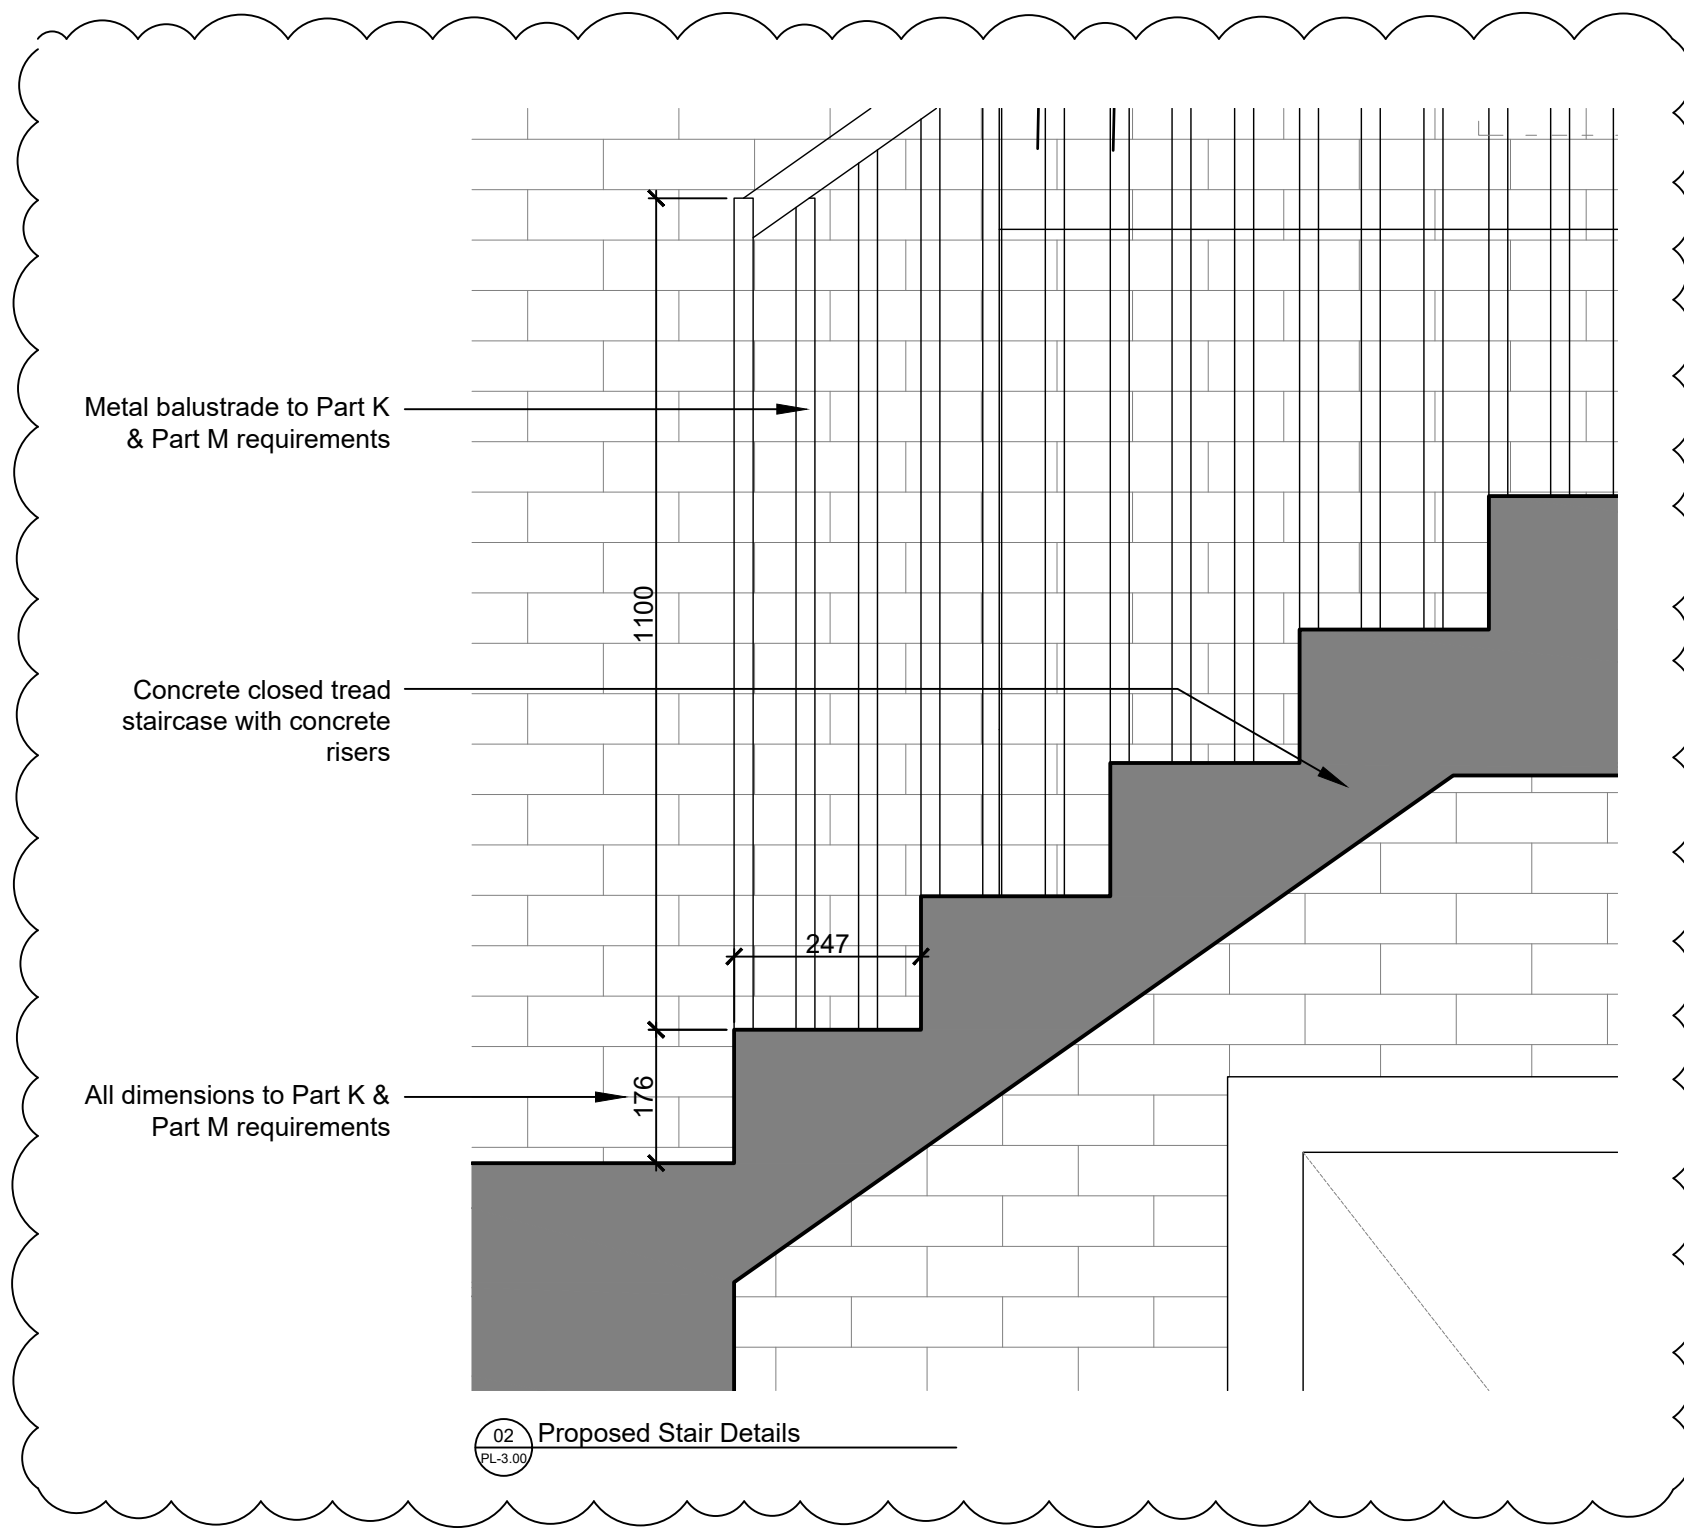

02 Proposed Stair Details  
PL-3.00

**Note:**

- No new lining or similar should be installed to the existing brick walls, which should be left exposed and repaired as required
- Prior to any paintwork stripping and the redecoration of the original features, including cast iron columns and the original steel doors, a paintwork analysis is required to inform the new redecoration scheme.
- New partitions should incorporate a shadow gap where these abut original brick walls.
- The existing brick walls should be stripped where covered in modern paintwork and left exposed unless otherwise agreed (i.e. sanitary finishes in toilets), with any repairs in lime mortar as required.
- Proposed M&E services to be exposed, with no suspended ceilings in the main spaces of the basement.