



Rev	Date	Notes	By
P01	17.07.23	First Issue	AG
P02	03.08.2023	Updated survey	MAS
P03	26.09.2023	Areas added: Purling specification amended	MAS



Arch 9 Internal Elevation 1

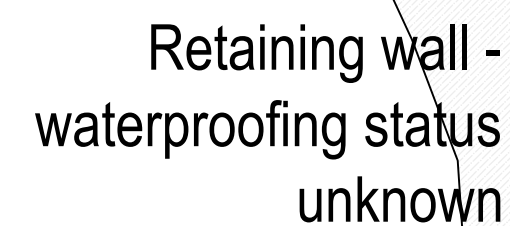

Approximate area of Type C lining to walls
(EXCLUDING returns) 75.4m²

Arch 9 Internal Elevation 2

10

10

10



10



--	--	--	--	--	--	--	--



Area inaccessible
or concealed from
view - presumed
brickwork

ALL FITOUT ELEMENTS TO BE
REMOVED TO PROVIDE ACCESS TO
BRICKWORK WALLS BEHIND

Brickwork Cleaning:

Note that the purpose of the cleaning is to remove the overlying residue, and not reverse any discolouration caused by water damage.

May require some repointing prior to cleaning.
Water washing (with pulse system). Warm water and
neutral pH soap.

Re-pointing works (following cleaning):
Manually rake out loose mortar. Remove / rake out any cement based mortar.

Remove all debris.

Note that there will be a limit on the area to be completed at any one time in order to retain the structural integrity of the arches. This limit may vary depending on location but a limit of 1m² should be assumed.

It is noted that for areas of hard cement mortar, limited use of power tools may be required to breach the mortar.

Pointing:

NHL 3.5 lime mortar (colour matched to original mortar) generally.
NHL 5 lime mortar to blue engineering brick details.

elliswilliams

Project Number: 2937
Project Name: Deansgate Locks

Drawing Status: S0
Drawing Number: **10609**
Drawing Name: Unit 9 Internal Elevations - proposed
Date: 27.06.23 Rev: P03
Drawn By: AG Scale: 1:50 @ A1

Wellfield Chester Road Preston Brook WA7 3BA
T: 01928 752200 E: info@ewa.co.uk W: ewa.co.uk