


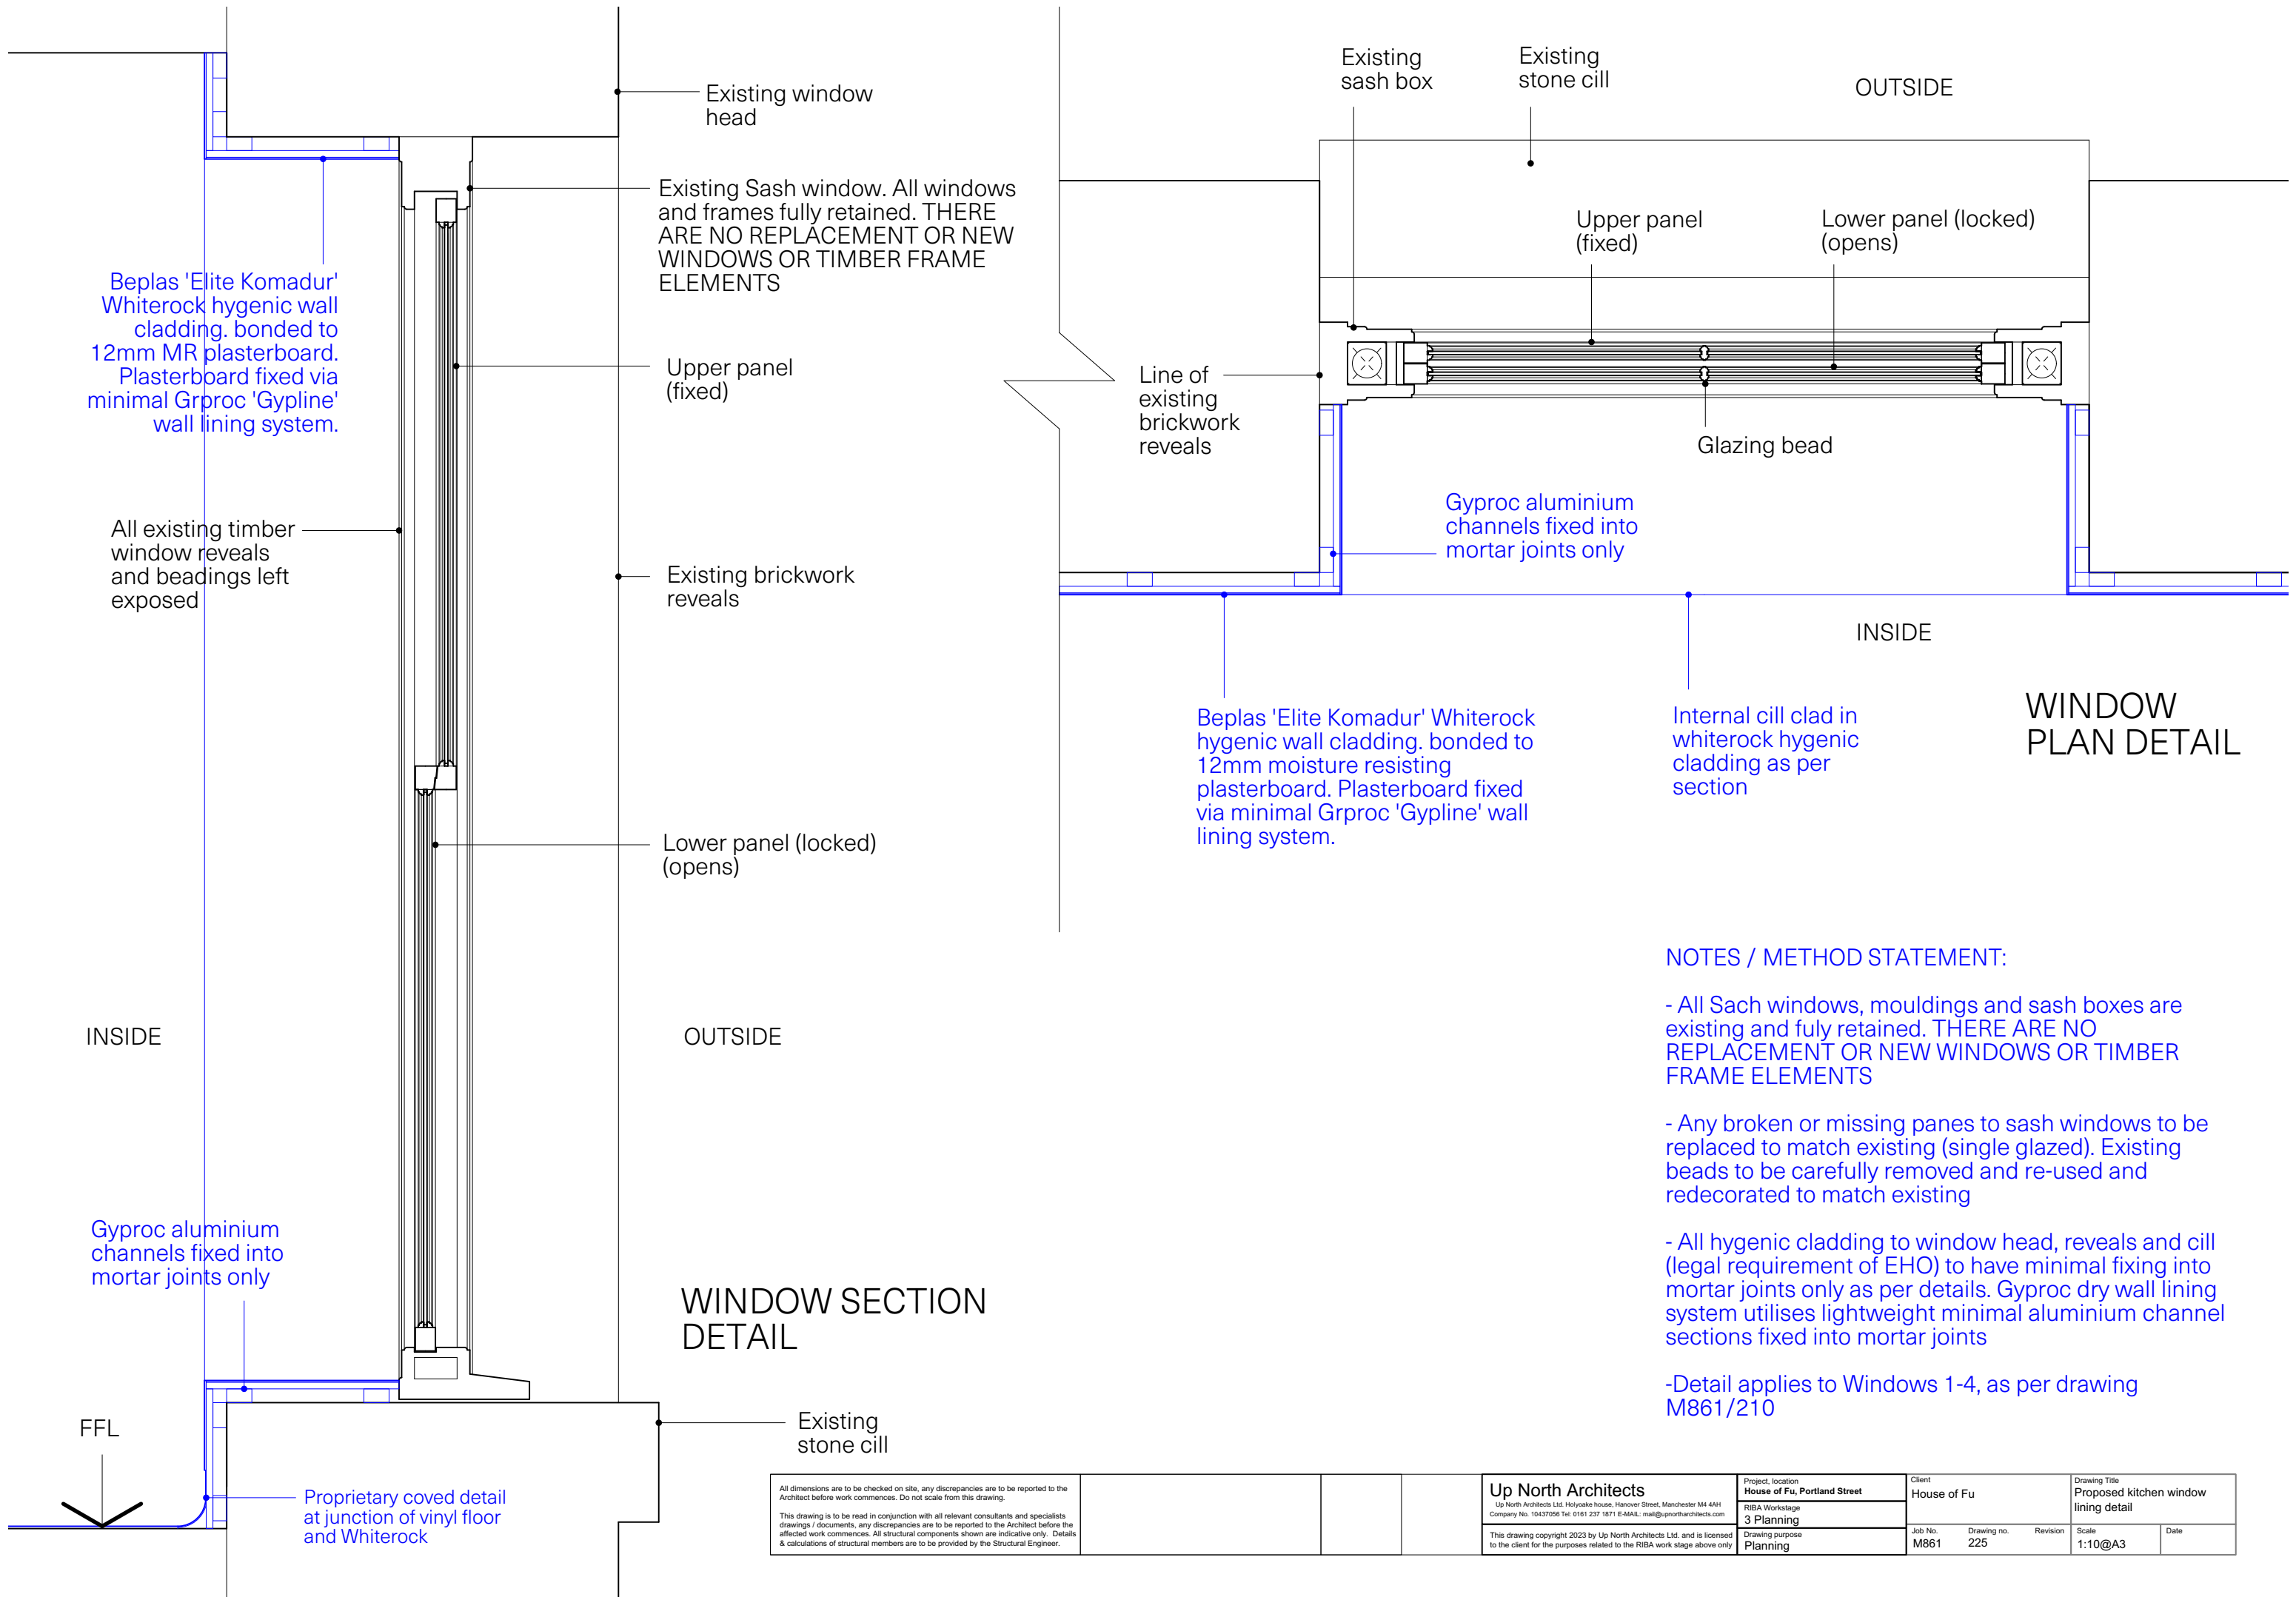

NOTES / METHOD STATEMENT:

- All Sach windows, mouldings and sash boxes are existing and fully retained. THERE ARE NO REPLACEMENT OR NEW WINDOWS OR TIMBER FRAME ELEMENTS
- Any broken or missing panes to sash windows to be replaced to match existing (single glazed). Existing beads to be carefully removed and re-used and redecorated to match existing
- All hygenic cladding to window head, reveals and cill (legal requirement of EHO) to have minimal fixing into mortar joints only as per details. Gyproc dry wall lining system utilises lightweight minimal aluminium channel sections fixed into mortar joints
- Detail applies to Windows 1-4, as per drawing M861/210

All dimensions are to be checked on site, any discrepancies are to be reported to the Architect before work commences. Do not scale from this drawing. This drawing is to be read in conjunction with all relevant consultants and specialists drawings / documents, any discrepancies are to be reported to the Architect before the affected work commences. All structural components shown are indicative only. Details & calculations of structural members are to be provided by the Structural Engineer.				Up North Architects Up North Architects Ltd. Holyoake house, Hanover Street, Manchester M4 4AH Company No. 10437056 Tel: 0161 237 1871 E-MAIL: mail@upnortharchitects.com	Project, location House of Fu, Portland Street	Client House of Fu	Drawing Title Proposed kitchen window lining detail		
					RIBA Workstage 3 Planning				
					This drawing copyright 2023 by Up North Architects Ltd. and is licensed to the client for the purposes related to the RIBA work stage above only	Drawing purpose Planning	Job No. M861	Drawing no. 225	Revision