

<h2 style="text-align: center;">HEALTH AND SAFETY INFORMATION</h2> <p>IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING</p>	
<p><u>CONSTRUCTION.</u></p> <ul style="list-style-type: none"> ALL WORKS WILL BE CARRIED OUT IN A LIVE OCCUPIED BUILDING. ALL WORKS TO BE COVERED UNDER DAILY RAMS WHICH HAVE BEEN AGREED WITH THE UNIVERSITY 	
<p><u>MAINTENANCE/CLEANING/OPERATION.</u></p> <ul style="list-style-type: none"> NO ABNORMAL RISKS IDENTIFIED AT THIS STAGE OF THE DESIGN 	
<p><u>DECOMMISSIONING/DEMOLITION.</u></p> <ul style="list-style-type: none"> NO ABNORMAL RISKS IDENTIFIED AT THIS STAGE OF THE DESIGN 	

CONSTRUCTION.

- ALL WORKS WILL BE CARRIED OUT IN A LIVE OCCUPIED BUILDING. ALL WORKS TO BE COVERED UNDER DAILY RAMS WHICH HAVE BEEN AGREED WITH THE UNIVERSITY

MAINTENANCE/CLEANING/OPERATION.


- NO ABNORMAL RISKS IDENTIFIED AT THIS STAGE OF THE DESIGN

- 1000

DECOMMISSIONING/DEMOLITION.

- NO ABNORMAL RISKS IDENTIFIED AT THIS STAGE OF THE DESIGN

- [illegible]

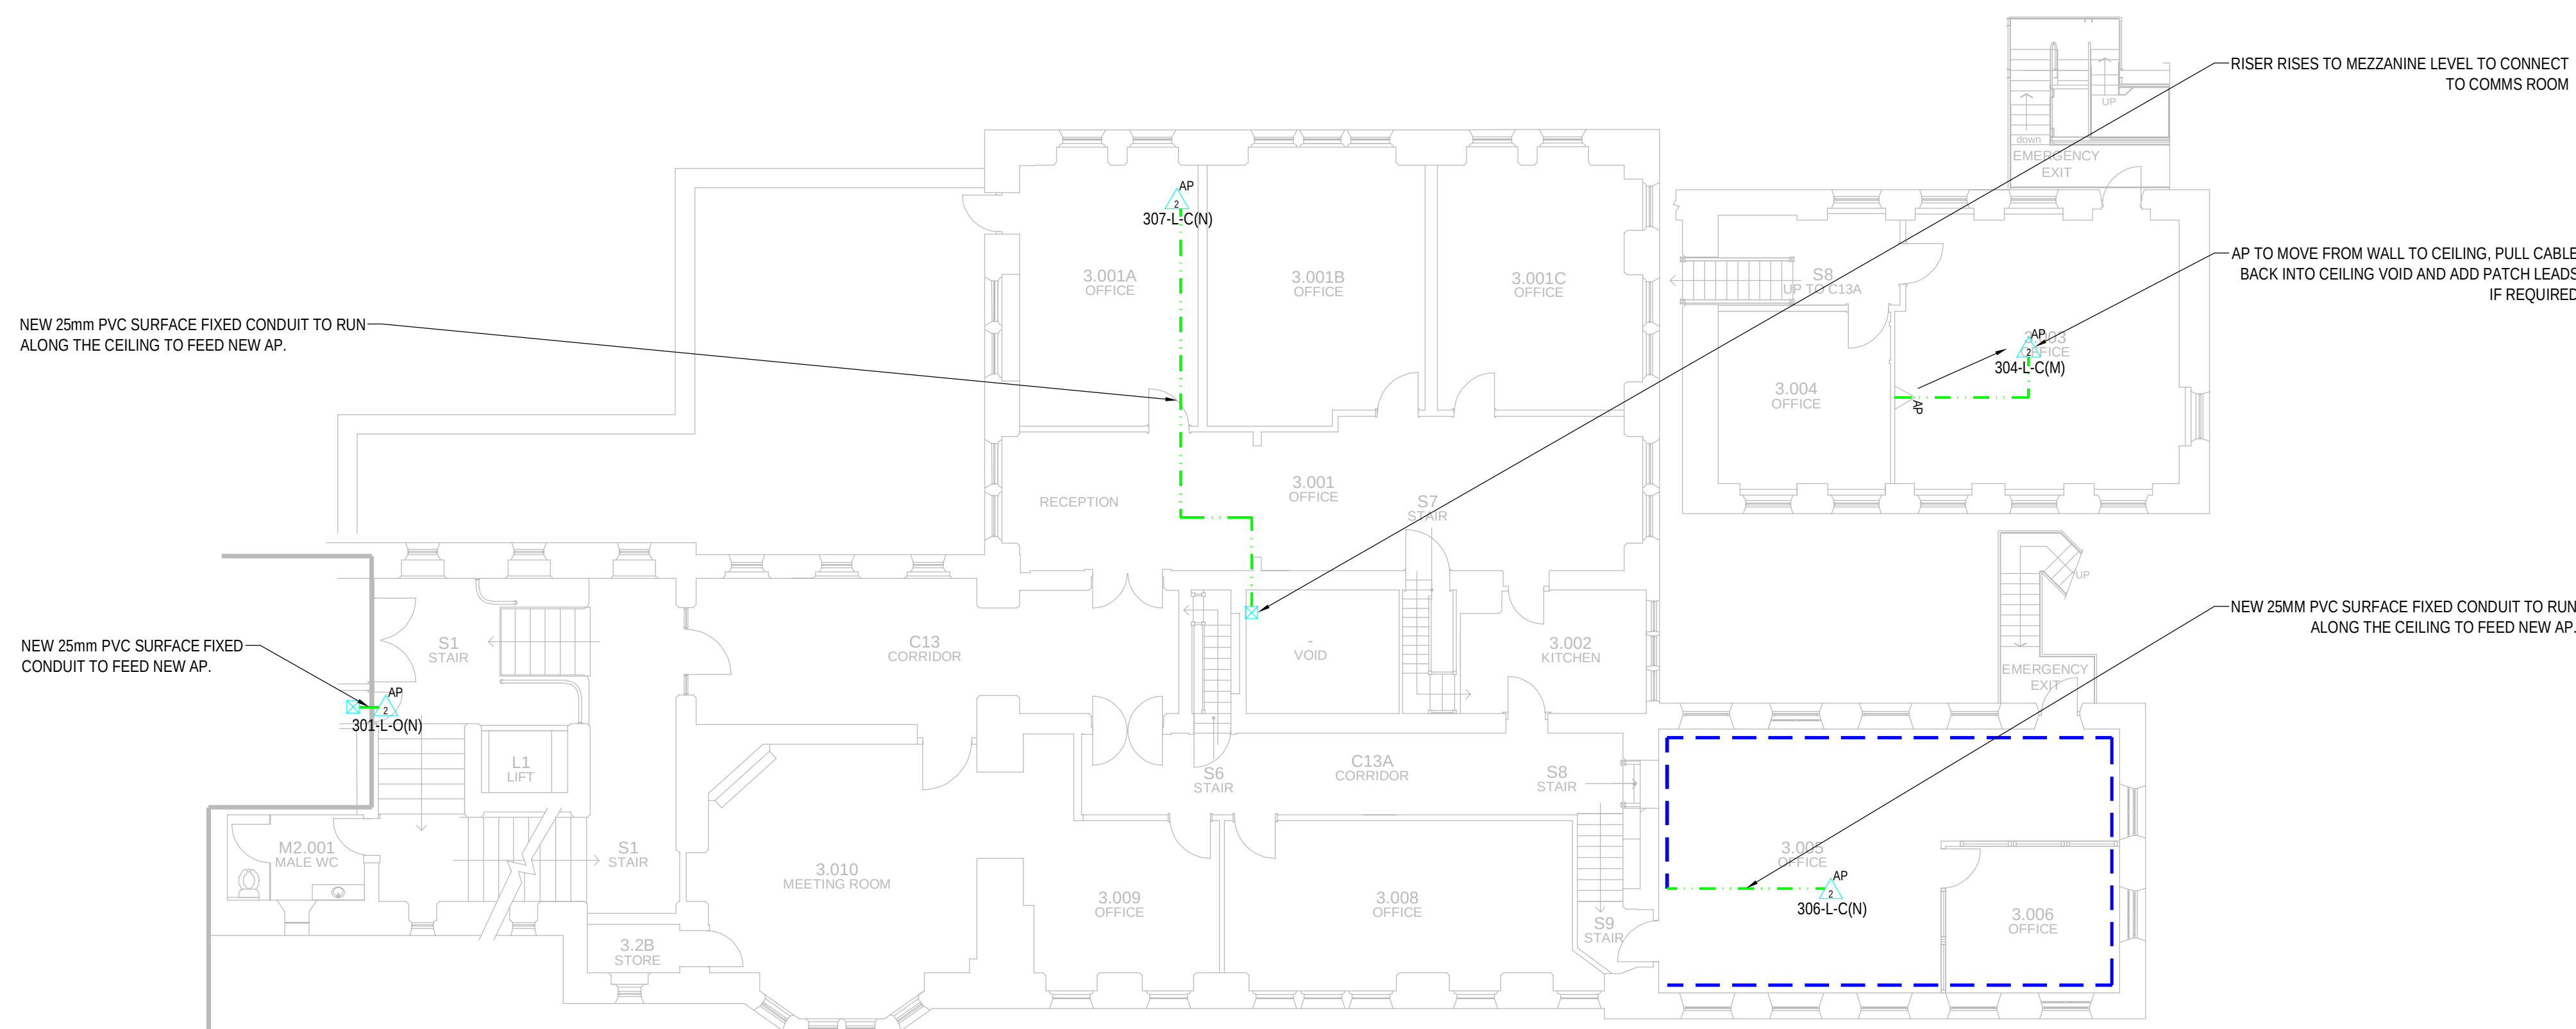

CONTAINMENT LEGEND	
 AP	WI-FI ACCESS POINT (AP) NUMBER DENOTES NO OF POINTS
	EXISTING DATA CONTAINMENT (TYPE DENOTED)
	NEW DATA CONTAINMENT (TYPE DENOTED)
	NEW CONDUIT (TYPE DENOTED)
	NEW TRUNKING (TYPE DENOTED)
	CONTAINMENT RISES TO CEILING / DROPS TO FLOOR
	CONTAINMENT TYPE AND SIZE: ELV = DATA BASKET

1. PLEASE DO NOT SCALE FROM THIS DRAWING.
2. THIS DRAWING FORMS PART OF THE MEP DETAILED DESIGN PACKAGE AND SHOULD BE READ IN CONJUNCTION WITH THE COMPLETE PACKAGE INCLUDING UOM STANDARDS / PROCEDURES AND DESIGNERS INFORMATION
3. THE ACCESS POINT REFERENCES INDICATED ON THIS DRAWING REFLECT THE ROC TECHNOLOGIES REFERENCES AND FOLLOW THEIR CONVENTION, IE;

FXX-T-M(A), WHERE
 F = FLOOR NUMBER
 XX = AP NUMBER
 T = AP TYPE
 H = AP-345
 L = AP315
 B = AP303
 M = MOUNTING TYPE
 C = CEILING
 W = WALL
 O = OBERON BRACKET
 (A) = ACTION
 R = REFRESH
 M = MOVE
 N = NEW
 D = DECOMMISSION
 K = KEEP

4. ALL NEW AP POINTS TO BE PROVIDED WITH 2NO DATA CABLES FROM COMMS ROOM.
5. CONSIDERATION HAS BEEN MADE TO ENSURE NO NEWLY INSTALLED CABLES EXCEED UoM ADVISED MAX LENGTH OF 90m. CONTRACTOR TO NOTIFY UNIVERSITY FM BEFORE INSTALLATION
6. ALL ROUTES AND WORKS TO BE COORDINATED WITH UNIVERSITY AND HERITAGE STAFF
7. ROUTING FOR TENDER PURPOSES, ALL ROUTES TO BE VERIFIED ON SITE

T02	-	UPDATED TO HERITAGE COMMENTS	MM	KM	31.08.2023
T01	-	TENDER ISSUE	MM	KM	16.05.2023
Rev	Dcc	Description	Dwn	Chkd	Date

TENDER

TROUP
BYWATERS
+ ANDERS

Bringing Buildings to Life

61 Oxford Street
Manchester M1 6EQ
t: (+44) 0161 974 1710
e: manchester@tbanda.com
w: www.tbanda.com

Project
UNIVERSITY OF MANCHESTER
NETWORK TRANSFORMATION

Title	BEYER BUILDING THIRD FLOOR WI-FI SYSTEM ENHANCEMENT
-------	---

Client
UNIVERSITY OF MANCHESTER

Project No.	Drawn By	Date	Checked	Scale
EA0029	TB	21/10/2019	KM	1:100

ACAD Model -	Revision
Drawing No. EA0029-BEY-E-65-03-001	T02

