


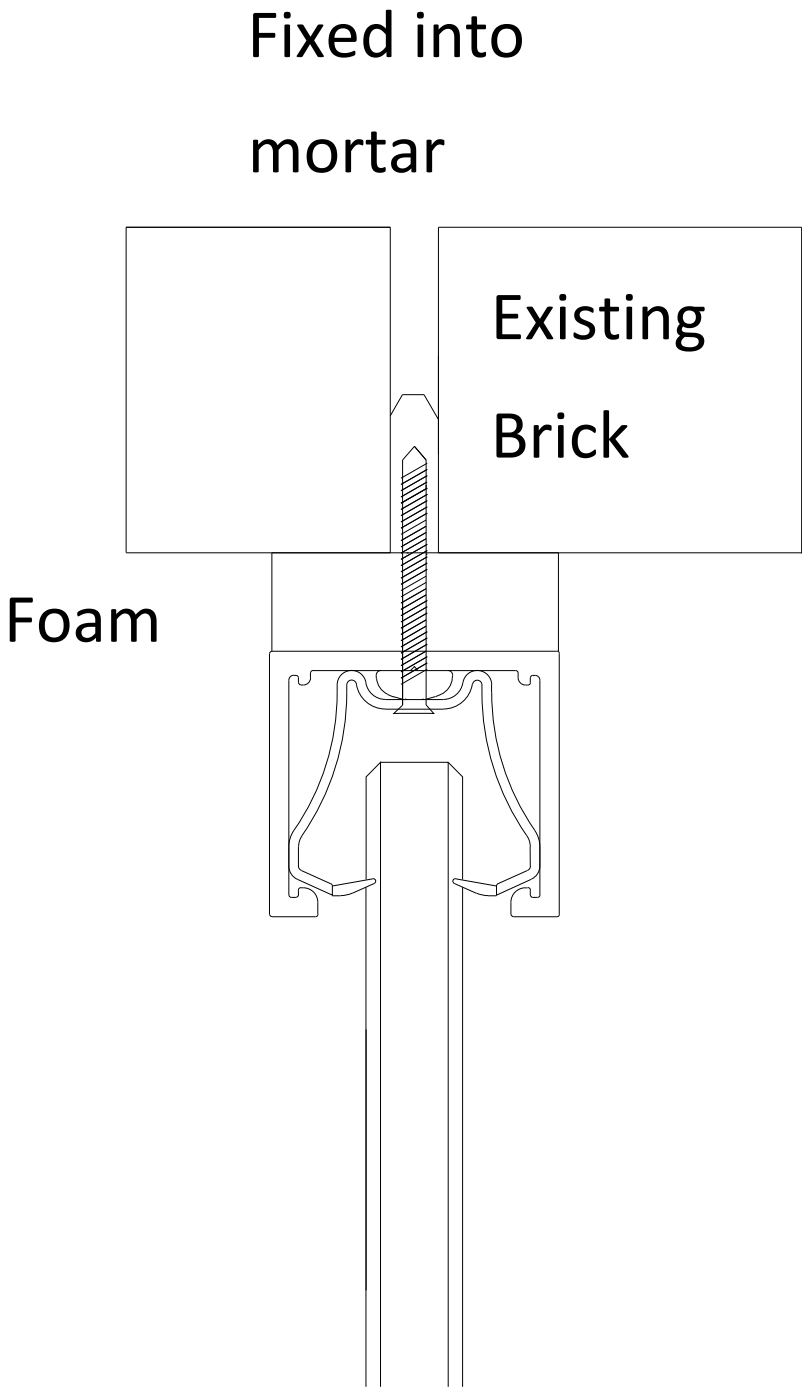

Aluminium perimeter head channel to be fitted every 300mm into centre into created bulkhead and to both sides into the same line fixing into mortar with 5mm raw plugs and screws all around. 10mm foam on double sided tape applied to back of the wall abutment channels to deal with uneven surface of the brick wall and sure that all gaps will be enclosed.

REV	AMENDMENT	DATE	CHKD
			
CLIENT Ear to the Ground			
PROJECT Dale Street			
DRAWING TITLE Fixing into Existing Brick			
SCALE N/A	DRAWN BY AB	CHECKED -	DATE MAR21
DRAWING NUMBER INS-517-00008		REVISION A	