




SECTION

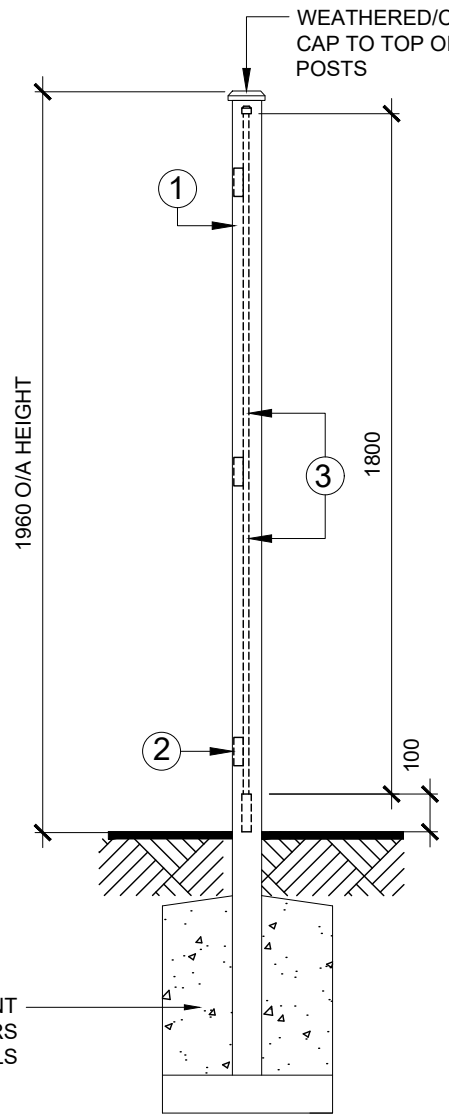


ELEVATION

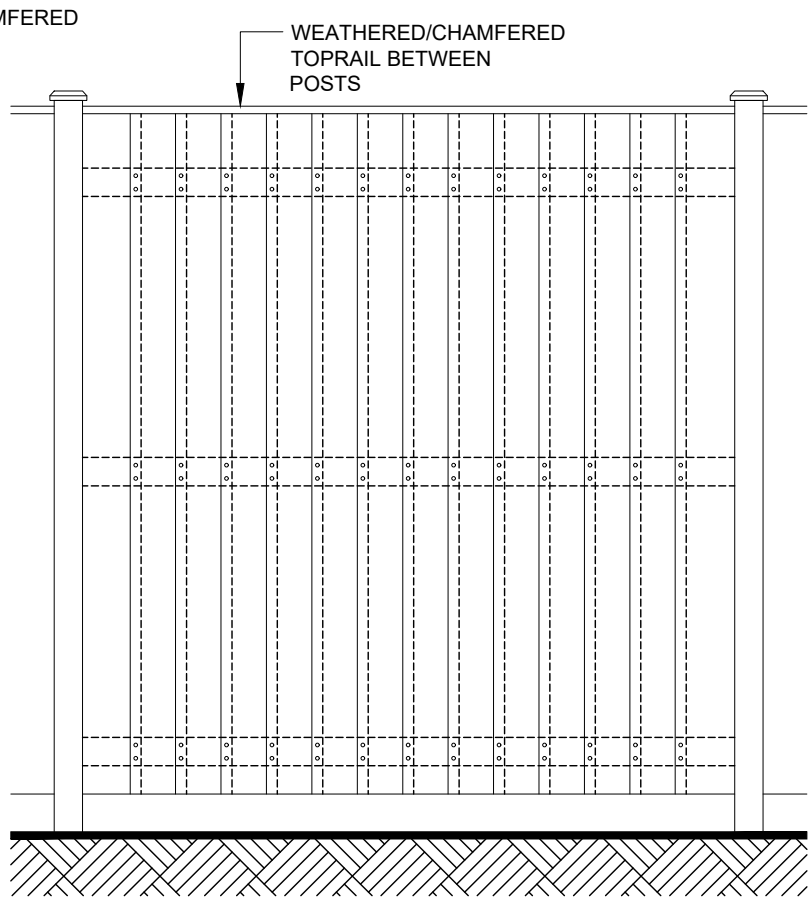

PLAN

## NOTES:

ALL TIMBERS SHALL BE PRESSURE IMPREGNATED WITH PRESERVATIVE AS SPECIFIED. FINISH TO BE TWO COATS WOOD DYE AS SPECIFIED. ALL CUT ENDS TO BE PRESERVATIVE TREATED PRIOR TO FIXING.

1. 75x75mm S/W POST WITH WEATHERED CAP AT 1.8m CENTRES.
2. 75x25mm SAWN SOFTWOOD RAILS FIXED TO EACH POST WITH 2 No. 125mm GALVANISED NAILS.
3. 150x11mm SAWN SOFTWOOD FEATHER EDGE BOARDS FIXED WITH MINIMUM 25mm OVERLAP ON THREE TIMBER RAILS WITH 2 No. 65mm GALVANISED NAILS PER RAIL.

| REV | BY | DATE | DESCRIPTION |
|---|---|---|---|
| | | | |
| | | | |
| | | | |

DRAWING TITLE

ENHANCED FENCING DETAILS

GROUP - STANDARD DETAILS

| | | | |
|---|---|---|---|
| SCALE | 1:20 @ A3 | DRAWN | RE |
| DATE | MAR 2023 | CHECKED | - |

DRAWING No: G-SD-04-007

REVISION: -

ANWYL thoughtful homes

DO NOT SCALE OFF THIS DRAWING. Copyright Anwyl Group
This drawing must be read in conjunction with relevant Anwyl Homes Specifications & Standard Details.