

EXISTING ELEVATION
From road side

Retaining boundary wall

Coping Stone

Cast iron original railings

Position of Cedar tree behind wall in St James's Church grounds

Approximate level of retained ground behind wall

1 2 3 4 5 6 7

1170 870 1050 1350

9460

GL

GL

A

A

Approx 9460mm section of retaining/boundary wall to be removed and rebuilt, including 7 Nr coping stones

Location of cracking to wall and bulging of wall stones

Cedar Tree

Ground level inside church grounds

GL

1020

1050

460

900

590

300

Cast Iron Railing

Coping Stone

Existing retaining boundary wall


Pavement level

GL

Road level (Stenner Lane)

GL

Kerb stone

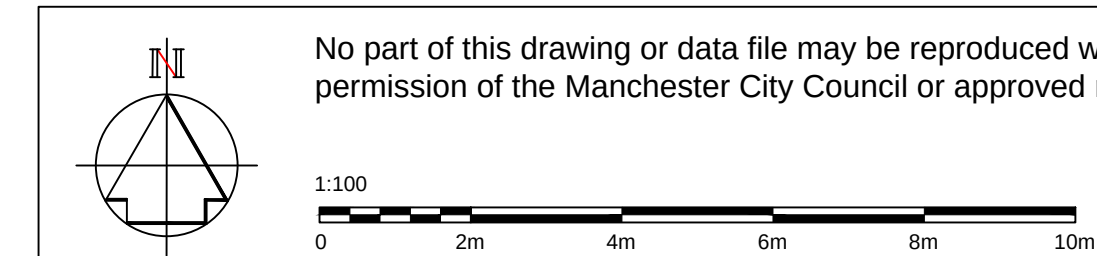

JW-MCC-XX-XX-DR-S-0010-S2

EXISTING WALL DETAILS

St James Church & Stenner Lane boundary wall