
J FREELEY LTD

Hoarding Proposal
Following demolition of retail units
Newton Street / Postal Street, Manchester

Following demolition of the building a solid hoarding will be erected to the following specification, along the perimeter boundary of the site.

2.4 metre high timber hoarding using steel 45 gallon drums filled with concrete with 2 no. 100 x 100 posts fixed to each drum, 4 no. 100 x 50 rails. 18mm smart ply boards with 100 x 20 top and bottom skirt. Posts set at 2.2m centres.

The line of the hoarding will be as below.

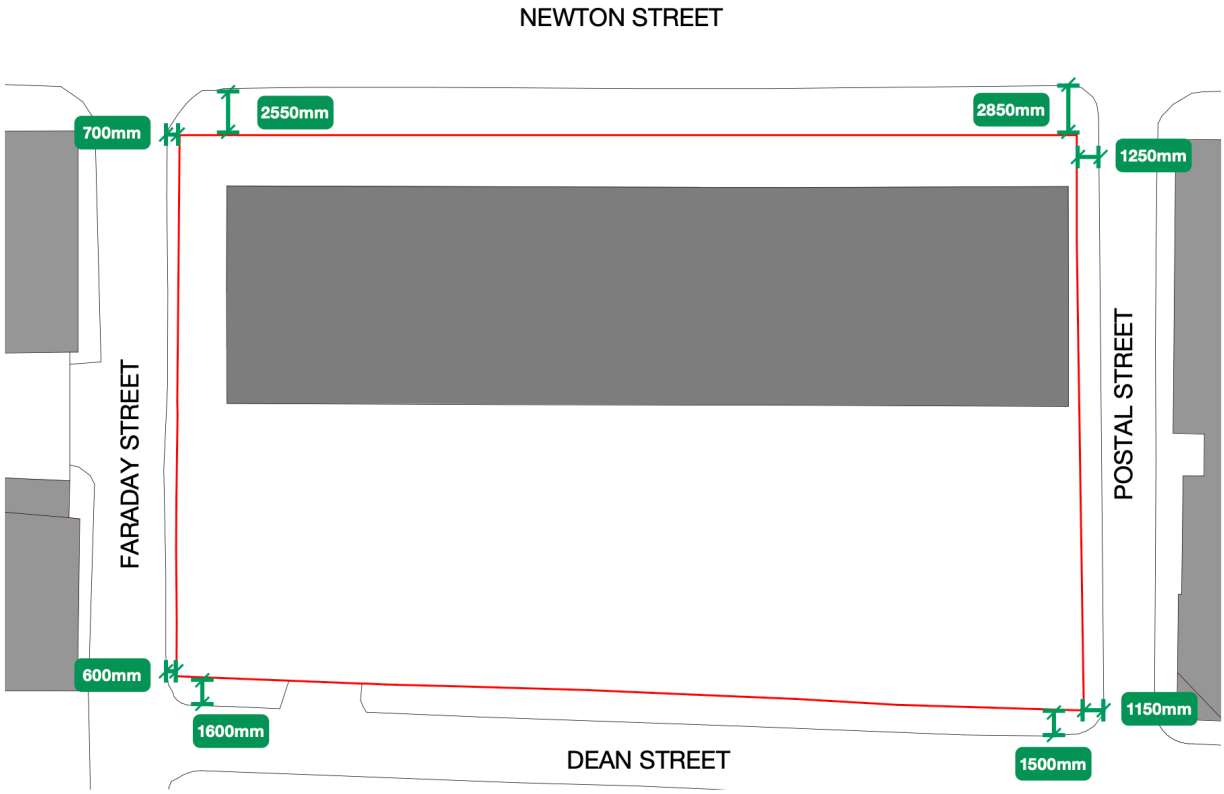

Notes:

1. There is currently no provision for painting the front face of the hoarding.
2. There is currently no provision for incorporating a pedestrian gate in the hoarding.