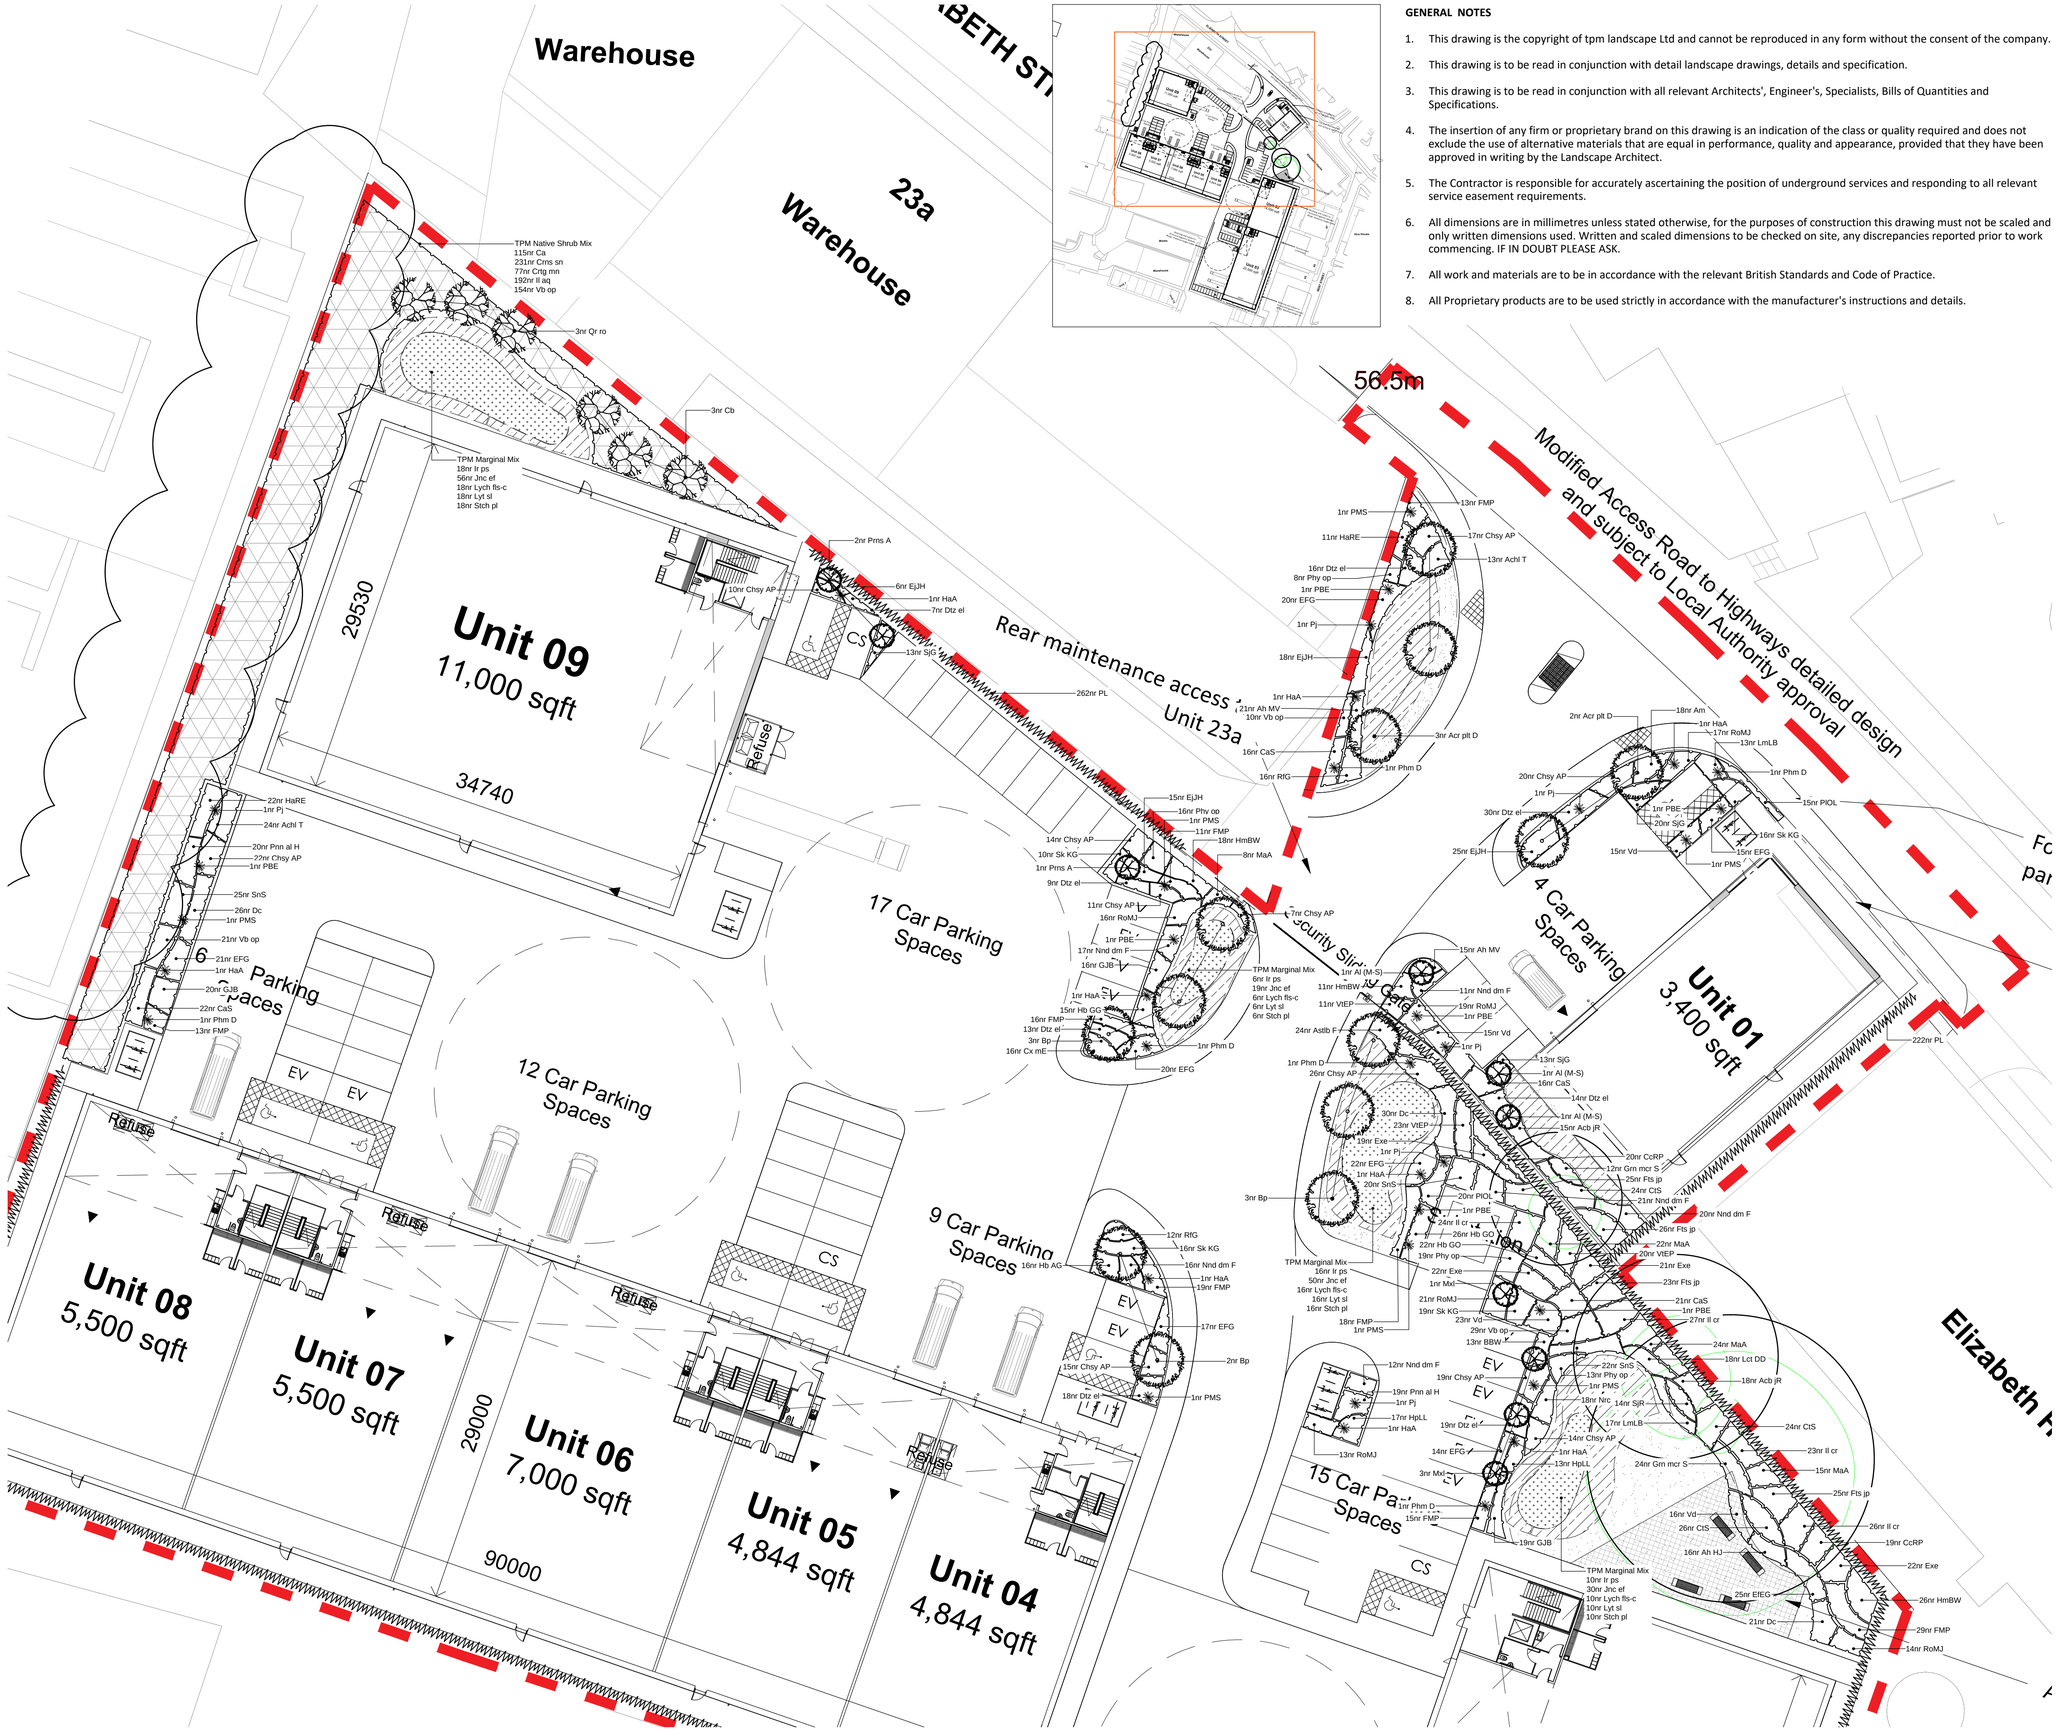


GENERAL NOTES

1. This drawing is the copyright of tpm landscape Ltd and cannot be reproduced in any form without the consent of the company.
2. This drawing is to be read in conjunction with detail landscape drawings, details and specification.
3. This drawing is to be read in conjunction with all relevant Architects', Engineer's, Specialists, Bills of Quantities and Specifications.
4. The insertion of any firm or proprietary brand on this drawing is an indication of the class or quality required and does not exclude the use of alternative materials that are equal in performance, quality and appearance, provided that they have been approved in writing by the Landscape Architect.
5. The Contractor is responsible for accurately ascertaining the position of underground services and responding to all relevant service easement requirements.
6. All dimensions are in millimetres unless stated otherwise, for the purposes of construction this drawing must not be scaled and only written dimensions used. Written and scaled dimensions to be checked on site, any discrepancies reported prior to work commencing. IF IN DOUBT PLEASE ASK.
7. All work and materials are to be in accordance with the relevant British Standards and Code of Practice.
8. All Proprietary products are to be used strictly in accordance with the manufacturer's instructions and details.

LEGEND

Proposed Large Trees (set in soft landscaping)
Trees to be planted as 16-18cm girth, Extra Heavy Standard, 4-6m high with 2.5m clear stem. Trees to be staked with suitable rubber ties

Proposed Native Trees
Trees to be planted as 14-16cm girth, Extra Heavy Standard, 4.5-5m high with 2.5m clear stem. Trees to be staked with suitable rubber ties

Proposed Small Ornamental Trees
To be multi-stem specimen, 200-250cm high.

Proposed Ornamental Shrubs
Proposed shrubs and flowering herbaceous plants to be planted as 3-5L pots at 3-5 per sq.m. planted with individual specimen shrubs.

Proposed Native Shrub Mix
To be planted as bareroot stock, 60-80cm, at 2 p/m², and protect with spiral guards

Proposed Hedgerow
To be planted as 100-120cm 5L pots, at 3 plants per linear m.

Proposed Amenity Grass

Proposed Wildflower Meadow
To be Emorsgate EM2 Standard General Purpose Meadow Mix, supplied by Emorsgate or similar approved. Including 80% of ornamental grasses and 20% of wildflowers. Sowing rate 4/gm2.

Proposed Wet-tolerant Plants
Proposed mix of perennial flowers able to withstand short periods of inundation.

REVISION NOTES

Rev	By	Description	Date
C	JL	Updated in line with the latest layout	13-04-23
B	ct	revison to base layout	16-6-22
A	TJ	Seating area added adjacent to Unit 2 & tree removed from vis splay	27.01.22

Client
Kier Property

Project
Elisabeth St, Cheetham Hill

Description
Planting Plan

Status
For Approval

Scale @ A1	Drawn	Checked	Date
1:250	JS	CT	01.12.21
Job number	**Drawing number**		**Revision**
4018	201		C

N

tpm landscape
chartered landscape architects
address: 4th Floor Studio 10 Little Lever St Manchester M1 1HR
tel: 0161 235 0600 fax 0601 email info@tpmlandscape.co.uk