
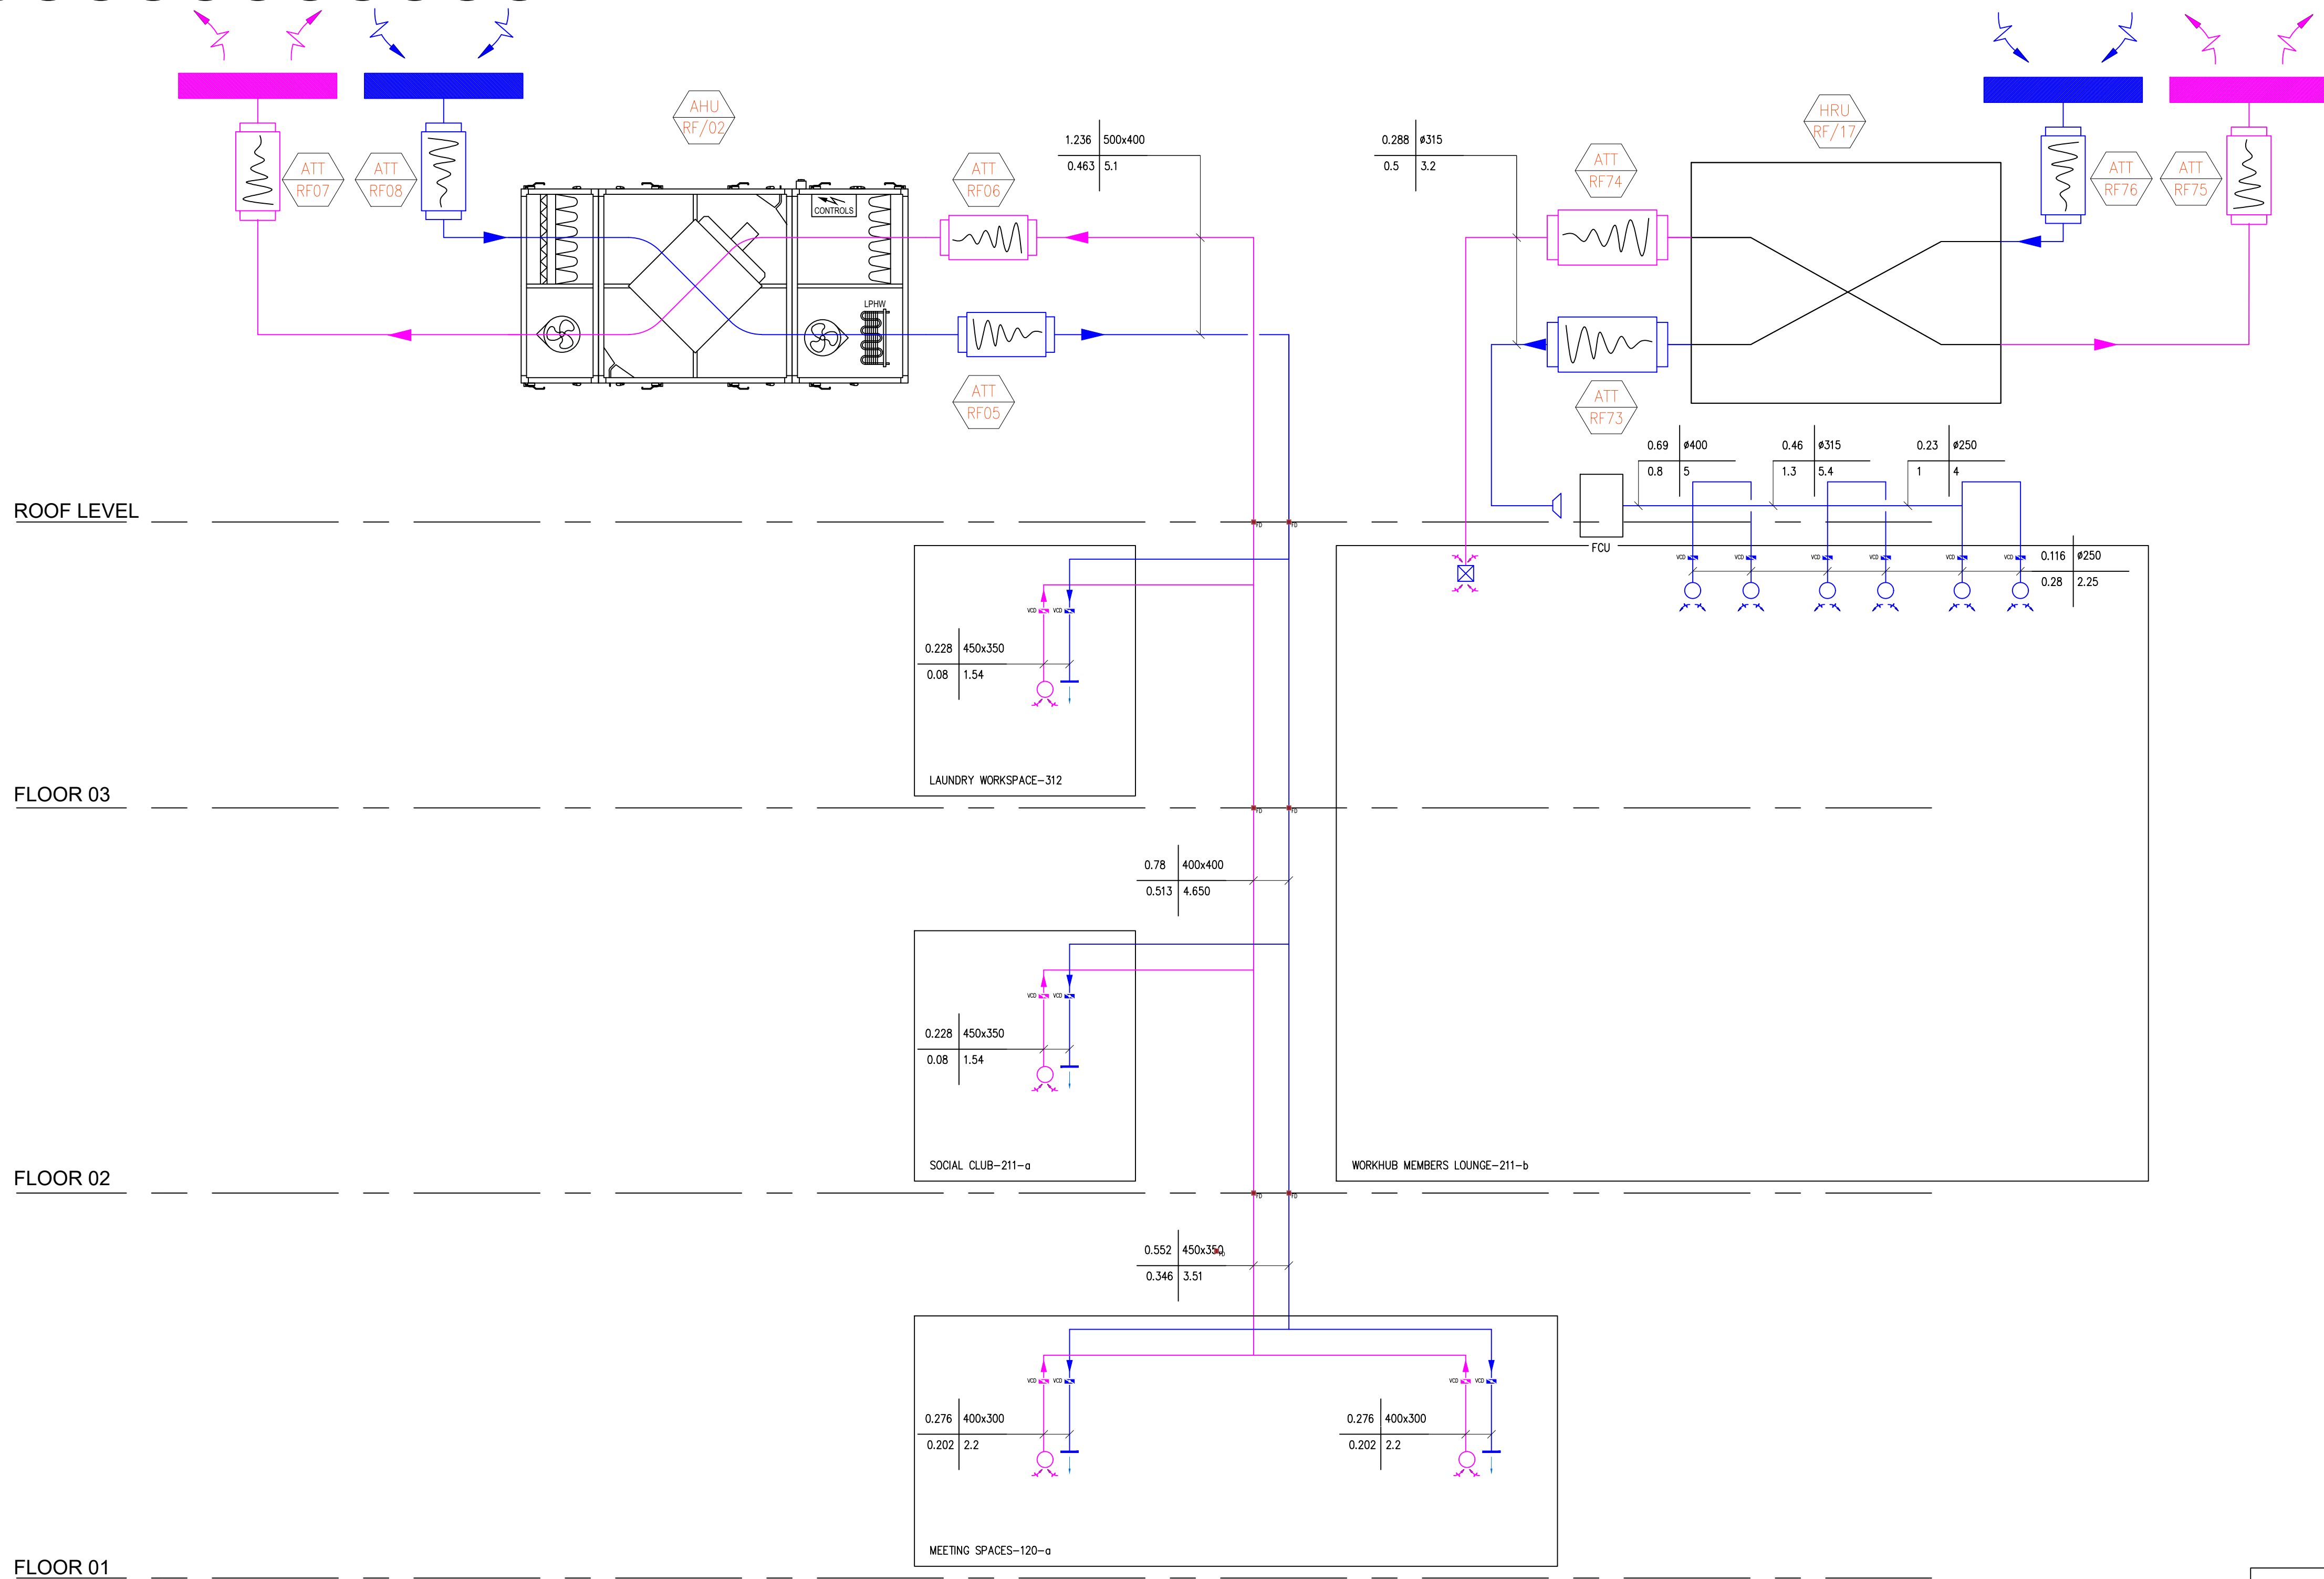


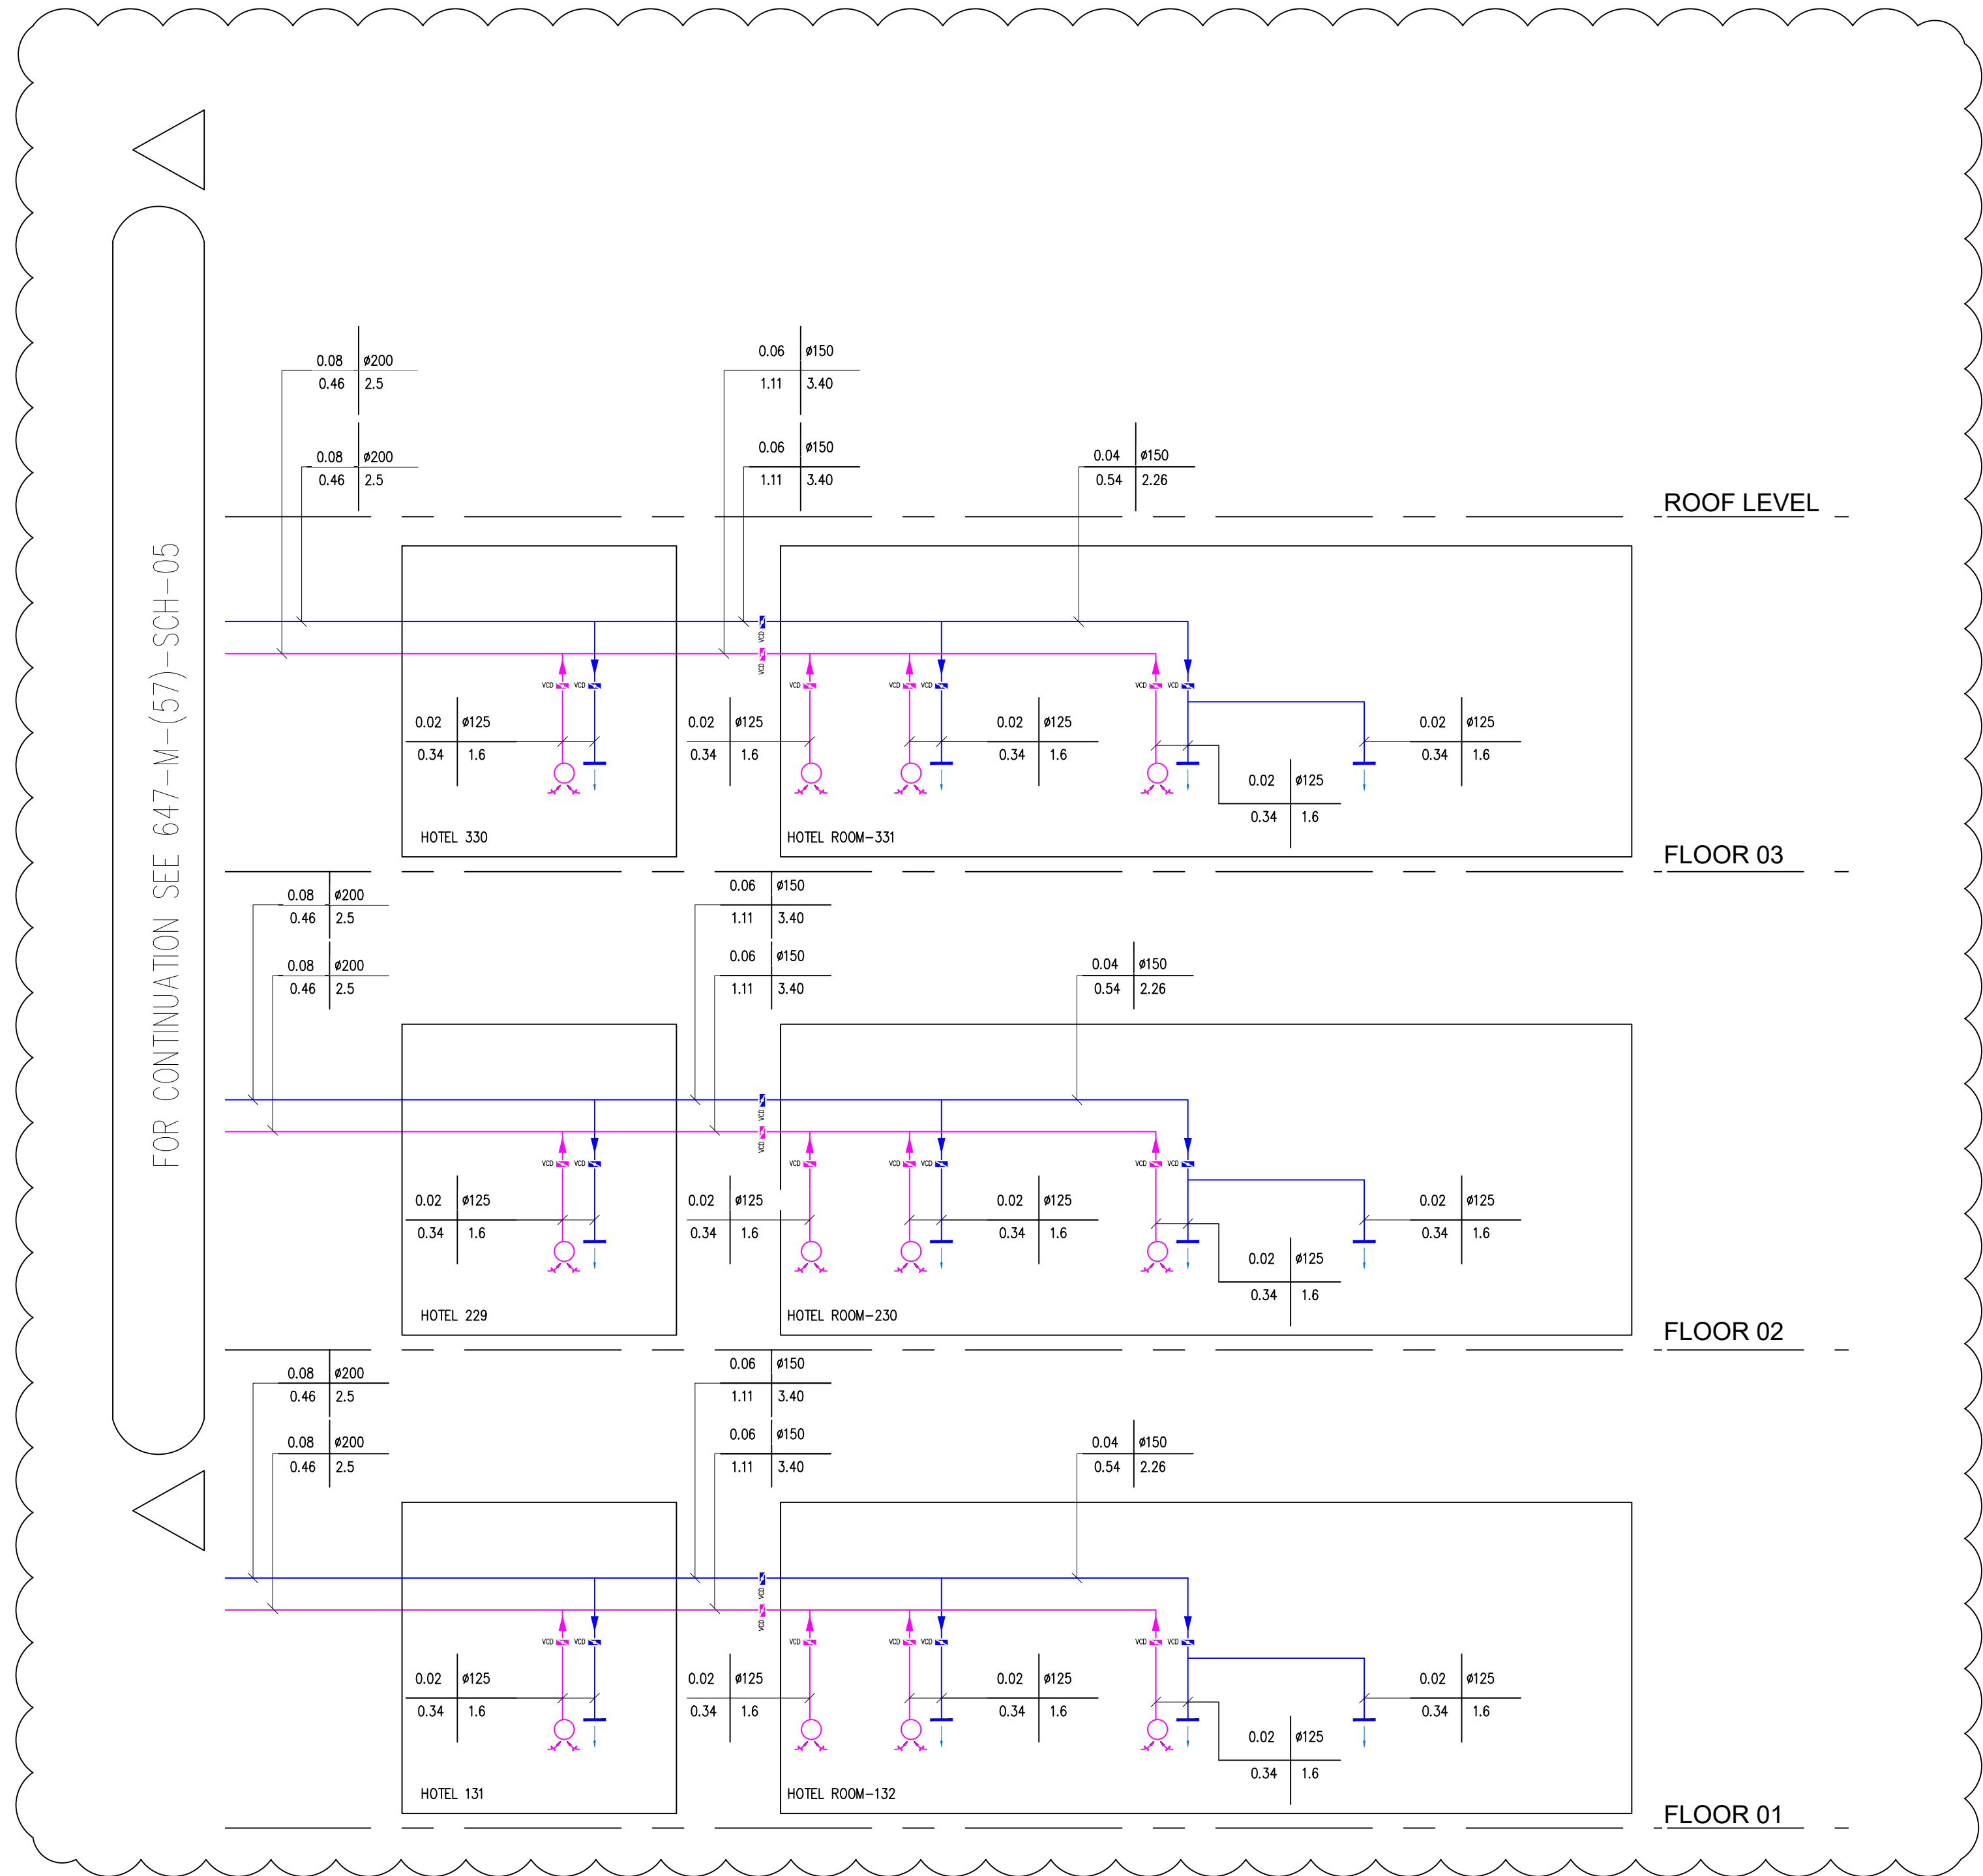

- NOTES
- DO NOT SCALE FROM THIS DRAWING.
 - ALL DIMENSIONS TO BE CHECKED ON SITE BY THE CONTRACTOR PRIOR TO PREPARATION OF SHOP DRAWINGS, FABRICATION OF PARTS, ERECTION OF STRUCTURE OR COMMENCEMENT OF WORK.
 - THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS DRAWINGS, SPECIFICATIONS AND SCHEDULES.
 - ANY PENETRATION THROUGH FLOOR, CEILING, STRUCTURAL ENGINEERS APPROVAL BEFORE COMMENCEMENT.
 - ALL PLANT AND EQUIPMENT SHALL BE INSTALLED FULLY IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.

- VENTILATION INSTALLATION
- ALL FAN INSTALLATIONS TO BE COMPLETE WITH ALL ACCESSORIES, CONTROLS AND FITTINGS TO PROVIDE A COMPLETE AND FUNCTIONAL INSTALLATION.
 - ALL VENTILATION SYSTEMS AND COMPONENTS TO BE INSTALLED, TESTED AND COMMISSIONED IN ACCORDANCE WITH BUILDING REGULATIONS APPROVED DOCUMENT 'F'.
 - ALL DUCTWORK SHALL BE INSTALLED NOT DIP GALVANISED AS PER DW144.
 - ALL DUCTWORK TO BE MANUFACTURED AND INSTALLED IN ACCORDANCE WITH DW144.
 - CONTRACTOR TO ENSURE CORE CUTS THROUGH JOISTS ARE SUITABLE TO ACCOMMODATE THE DUCTWORK.
 - ALL DUCT RUNS ASSUME CLEAR PATHS THROUGH CEILING JOISTS AND HAVE NOT ALLOWED FOR DEVIATION THROUGH JOISTS.
 - FLEXIBLE DUCTING HAS BEEN ALLOWED FOR THE FINAL UNIT CONNECTION, NO MORE THAN 300mm PER LEG SHOULD BE USED AS PER BPEC GUIDANCE.
 - ATTENUATION AND FIRE PROTECTION HAS BEEN EXCLUDED AS WE ARE NOT IN RECEIPT OF A FIRE STRATEGY OR ACUSTIC REPORT AT THIS STAGE.
 - CONDENSATE DRAIN PIPING WILL BE REQUIRED IN 25mm, THIS IS TO BE SUPPLIED BY THE CONTRACTOR. ALL CONDENSATE PIPING IS TO BE INSULATED WITHIN A COLD SPACE AND HAVE A MINIMUM FALL OF 10 DEGREES.
 - ALL DUCTING WITHIN AN UNHEATED SPACE MUST BE INSULATED IN ACCORDANCE WITH PART 7 OF THE 2019 BUILDING REGULATIONS. FRESH AIR INTAKE AND EXHAUST AIR LEADS ARE TO BE FULLY INSULATED BACK TO THE UNIT.
 - A MINIMUM DISTANCE OF 500mm IS REQUIRED BETWEEN EACH SPOUT OFF THE UNIT AND ANY DUCTWORK FITTING. FLEXIBLE DUCT SHOULD BE PULLED TAUGHT WITH SMOOTH BENDS ONLY.
 - PLEASE NOTE TO COMPLY WITH CURRENT BUILDING REGULATIONS MANUAL BOOST SWITCHES ARE TO BE PROVIDED TO EACH NET AREA. THESE ARE TO BE PROVIDED AND FITTED BY THE CONTRACTOR.
 - SUPPLY AND EXTRACT VALVES SHALL BE COMMISSIONED / TRIANDED AT THE GRILLE TO ENSURE THE CORRECT FLOW PATH IS ACHIEVED.
 - BETWEEN EACH RISE AND FALL BETWEEN FLOOR LEVELS, ALL MECHANICAL & ELECTRICAL CONTRACTORS SHALL ALLOW FOR OFFSETS DURING INSTALLATION.
 - G4 & F7 FILTRATION SHALL BE UTILISED.
 - WORKSPACE OFFICES SUPPLY AND EXTRACT GRILLES SHALL BE FIXED TO THE SIDES OF THE RISERS WITHIN THE SPACE VIA FIRE RATED GRILLES C/YM FIRE/SMOKE DAMPER.

- LEGEND
- EXTRACT DUCT
 - SUPPLY DUCT
 - EXTRACT VALVE
 - SUPPLY TERMINAL
 - VOLUME CONTROL DAMPER
 - FIRE DAMPER
 - HEAT RECOVERY VENTILATION UNIT
 - AIR HANDLING UNIT
 - ATTENUATOR
 - CROSS -TALK ATTENUATOR
 - FRESH AIR LOUVER
 - EXHAUST AIR LOUVER
 - AIR VOLUME
 - DUCT DIMENSIONS
 - VELOCITY
 - PRESSURE DROP

FOR COMMENT
NOT FOR SITE USE

11.04.22	TENDER ISSUE	T2	WJ	RG
07.02.22	TENDER ISSUE	T2	WJ	AF
02.06.21	TENDER ISSUE	T1	GT	RG
Date	Description	Rev	Des	Chk

CONSOLUX
CONSOLUX M&E CONSULTING LTD.
MECHANICAL & ELECTRICAL CONSULTING ENGINEERS

London Office
25 Cecily Street
London W1U 0DW
Tel: +44 (0)207 724 3030
Fax: +44 (0)207 617 7185
mail@consolux.co.uk

Liverpool Office
The Cotton Exchange
Liverpool L2 9XR
Tel: +44 (0)151 708 9469
Fax: +44 (0)151 709 7189
www.consolux.co.uk

Project
LONDON ROAD FIRE STATION
FIRE STATION, LONDON ROAD,
MANCHESTER, M1

Drawing Title
MECHANICAL SERVICES
VENTILATION SERVICES
SCHEMATICS 6 OF 6

Date:	Design By:	Drawn By:	Scale:
APR 21	RG	GT	N.T.S

Issue Status
TENDER

Drawing Number:
647-M-(57)-SCH-06

Rev:
T3

XREF Updated on: N/A

NOTE: This drawing is the copyright of Consolux M&E Consulting Limited and may not be used without its prior written consent. Written dimensions to be taken in preference to scaled dimensions. Do not scale these drawings.

A0