

Registered Office:
Pollock Lifts, Unit1, Sloefield Drive,
Trooperslane Industrial Park,
Carrickfergus, County Antrim, BT38 8GX

Tel: 028 9336 8167
Fax: 028 9336 7846

Darren Smith
Manchester Council

Email: darren.smith@manchester.gov.uk
j.roberts@manchester.gov.uk
Craig.leedham@manchester.gov.uk
Sarah.piercey@manchester.gov.uk

12th December 2022

Dear Mr Smith,

Quotation Ref: KR 56530-22

Customer Information: 100 Burnage Lane, Manchester, M19 2NG

Further to your recent request for a quotation to supply & install a Pollock CLASSIC Independence Step Lift, we have pleasure in quoting as follows:

Supply, delivery and installation of a Pollock CLASSIC Independence Step Lift to the following specifications:

Manual Interlock gate and slam post at the upper level (aluminium gate with silicone acrylic infill panel)

Scissor frames and bellows (Rise 550mm)

Electric Hydraulic Power with Battery Back-up

Sensitive edges and Safety Switches

Aluminium Platforms – 900 x 1400mm with on-board ramp and aluminium checker plate flooring

Stainless steel handrails

Upper and lower call stations (keyed) lower call station post mounted

Safety shut off sensors

C.E. Approval

12 months parts & labour warranty

Safe working load 280Kgs

Install dedicated RCD protected circuit for lift

Extended warranty 2, 3, 4 & 5 years following installation

Supply & install mini fuse board with type 2 surge protection

Silicone acrylic infill panels to stainless steel handrails

Cost £6,313.00

Cost £240.00

Cost £980.00

Cost £200.00

Cost £368.00



Pollock Lifts Ltd is a limited company registered in Northern Ireland
Company Number NI 18971

VAT Number: 769009015

Registered Office:
1 Sloefield Drive, Troopers Lane Industrial Estate, Carrickfergus, Co Antrim, BT38 8GX



Building works:

1. Existing low threshold door and frame to remain (clear opening is 830mm).
2. Raise the floor level of the porch floor
3. Provide a dedicated power supply, terminating with a 13amp. Switched fused spur at low level (lift charger adjacent).
4. Provide 32mm ducting's for power supply and call stations, ducting's to have swept bends and draw cords
5. Remove the existing UPVC door, frame, top panel and the front side panel Remove a section of wall, supply and fit a section of wall to create an opening of 1150mm, supply and fit a new pair of UPVC low threshold doors, frame and top panel with an opener, Minimum clear opening with doors open to be 850mm
6. Build a brick and flag plinth at internal floor level, lift face to be solid brick or 7kn concrete block concealed behind the lift, plinth to be 500mm above the concrete base for lift
7. 1300mm x 200mm x 200mm shuttered concrete insert for lift gate fixing.
8. Galvanised steel balustrade type railings to all exposed sides of plinth and steps, painted black, 1100mm high on level plinth, 900mm high to sides of steps, 90mm maximum gap between vertical rails
9. Excavate the garden/path and lay a 1950mm x 1600mm x 100mm thick flat concrete base under lift position (level side to side, to fall away from lifting face, max. fall is 10mm over 1900mm).
10. Remove the existing hand rail and timber fence, lay new edging stone along the boundary lane, supply and fit a 900mm high timber picket fence
11. Forma small flower bed.
12. Flagged half landing.
13. Brick and flag steps, minimum 900mm wide with 300mm goings and maximum 170mm risers
14. 600mm wide flagged access path
15. Flagged area in front of steps and lift graded to pavement level.
16. Pollock Classic step lift with Manual upper gate, side rails with glazed panels, mechanical lower ramp, platform size 1400mm x 900mm and SWL 340 KG
17. Post mounted lower call station **Cost £11,538.00**


Total Cost (Exclusive of VAT) £19,639.00

Options:

- | | |
|--|------|
| 1. On board ramp at lower level | Inc. |
| 2. Upper gate (manual) aluminium with silicone acrylic insert | Inc. |
| 3. Stainless steel handrails with silicone acrylic infill panels | Inc. |
| 4. Pollock Lift installation (inc.delivery from Stone) | Inc |
| 5. Lower call station post mounted | Inc |
| 6. 60 months parts & Labour warranty | Inc. |

Please Note:

The client wasn't at home at time of survey, so I was unable to measure her wheel chair, her Son told me that her wheel chair fits through the inner door which has a clear width 830mm when the door is in the open position, the new external double doors will have a minimum clear width of 850mm and the lift platform is 900mm wide.



Registered Office:
Pollock Lifts, Unit1, Sloefield Drive,
Trooperslane Industrial Park,
Carrickfergus, County Antrim, BT38 8GX

Tel: 028 9336 8167

Fax: 028 9336 7846

Trusting that our quotation meets with your approval and that we may be of service. – If you wish to proceed with this quotation please forward your order to orders@pollocklifts.co.uk

Yours sincerely,

K Humphreys


Chris Reid
Installations Manager


Cc. Kevin Ruttle – Area Sales Manager – Mob: 07866 477861



Pollock Lifts Ltd is a limited company registered in Northern Ireland
Company Number: NI 18971
VAT Number: 769009015
Registered Office:
1 Sloefield Drive, Troopers Lane Industrial Estate, Carrickfergus, Co Antrim, BT38 8GX



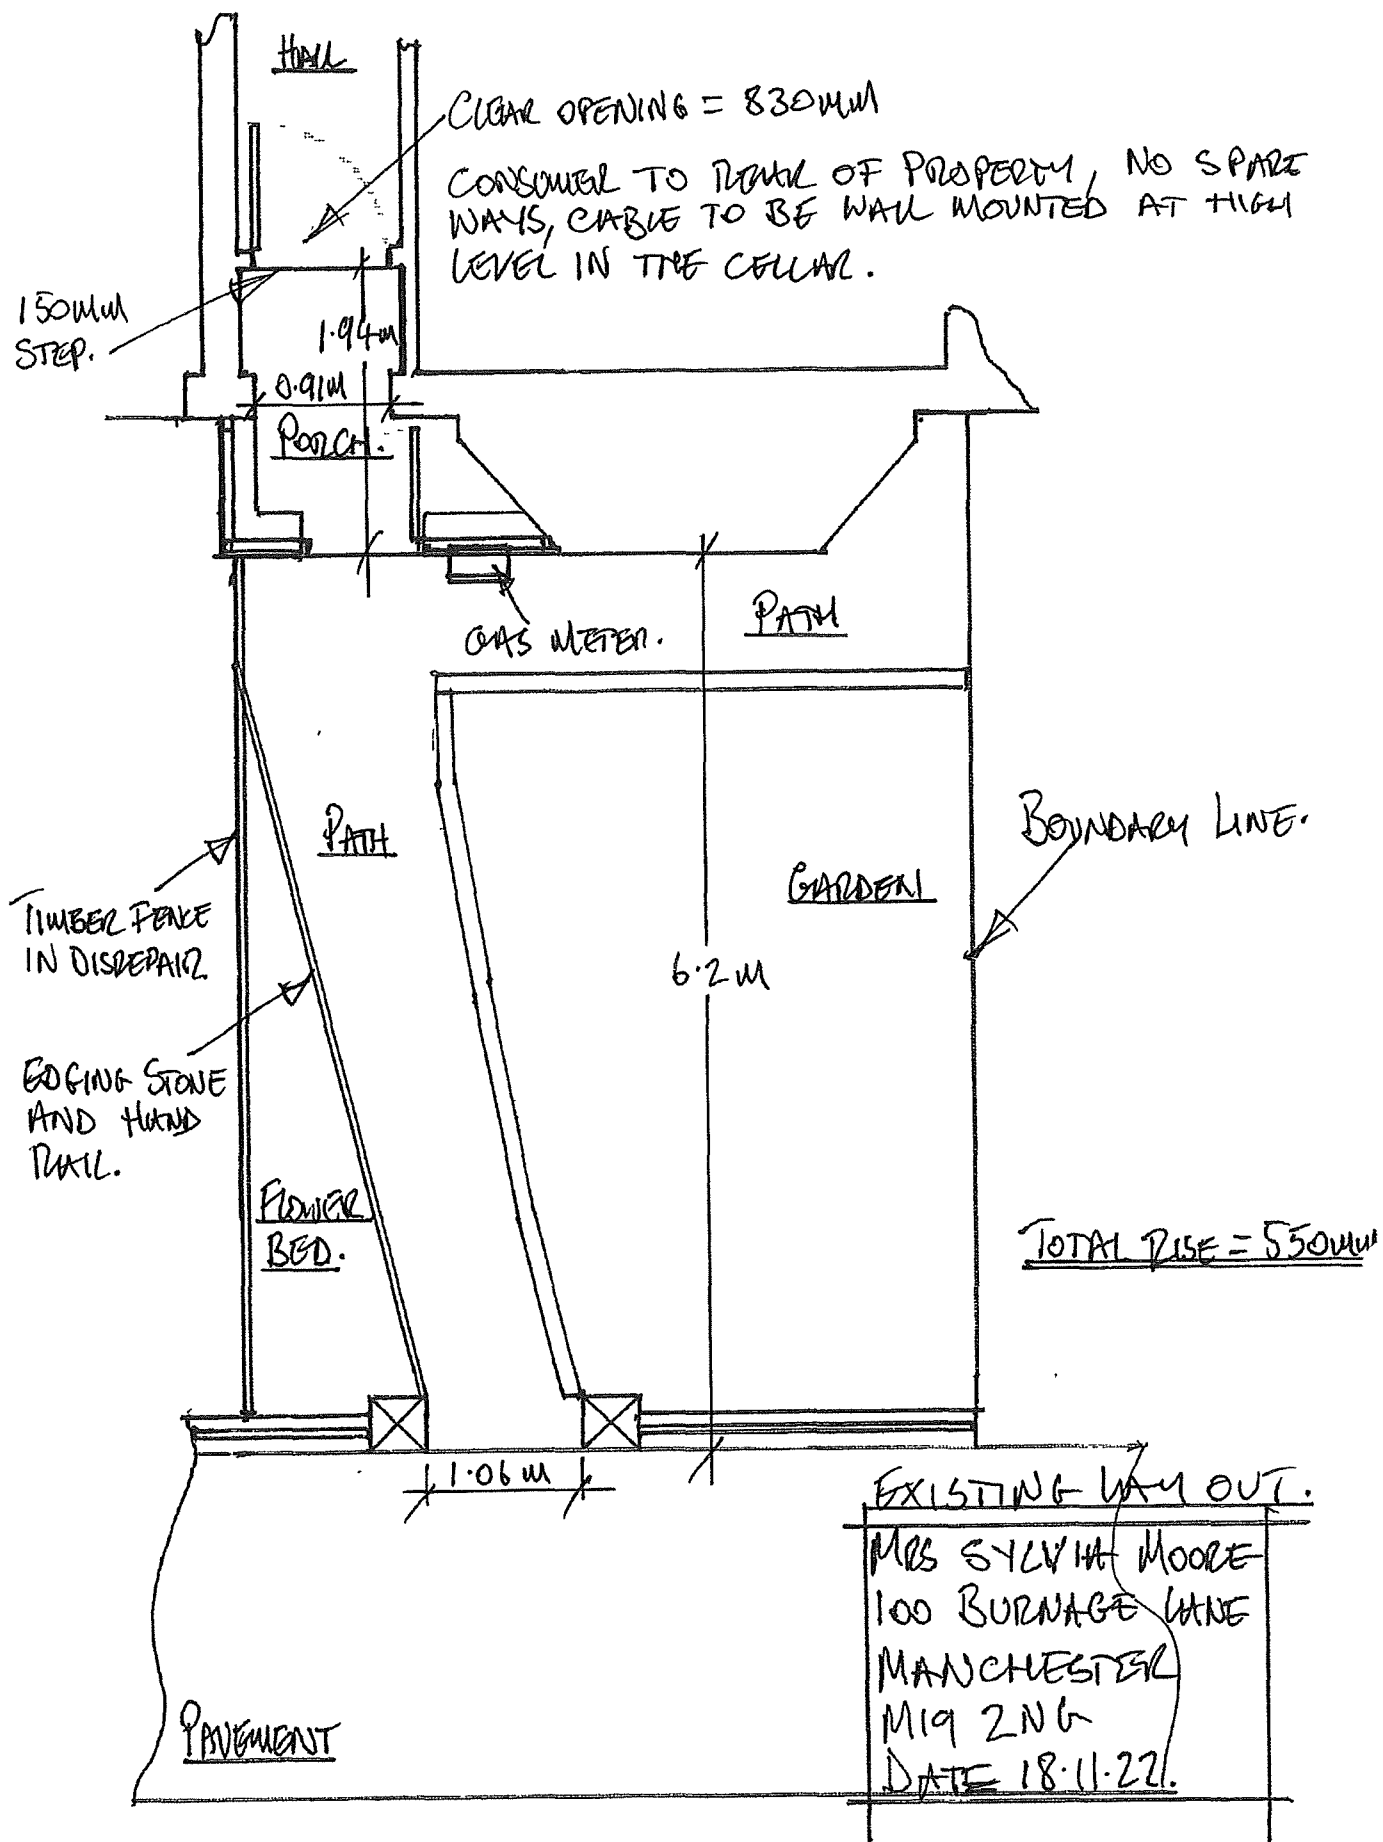



MRS SYLVIA MOORE
100 BURNAGE LANE
MANCHESTER
M19 2NG
DATE 18.11.22.

Proposed lay out

100 Burnage Lane

Manchester

M19 2NG

Date 18.11.22.

1. Existing low threshold door and frame to remain (clear opening is 830mm).
2. Raise the floor level of the porch floor.
3. Provide a dedicated power supply, terminating with a 13amp. Switched fused spur at low level (lift charger adjacent).
4. Provide 32mm ducting's for power supply and call stations, ducting's to have swept bends and draw cords.
5. Remove the existing UPVC door, frame, top panel and the front side panel. Remove a section of wall, supply and fit a section of wall to create an opening of 1150mm, supply and fit a new pair of UPVC low threshold doors, frame and top panel with an opener, Minimum clear opening with doors open to be 850mm.
6. Build a brick and flag plinth at internal floor level, lift face to be solid brick or 7kn concrete block concealed behind the lift, plinth to be 500mm above the concrete base for lift.
7. 1300mm x 200mm x 200mm shuttered concrete insert for lift gate fixing.
8. Galvanised steel balustrade type railings to all exposed sides of plinth and steps, painted black, 1100mm high on level plinth, 900mm high to sides of steps, 90mm maximum gap between vertical rails.
9. Excavate the garden/path and lay a 1950mm x 1600mm x 100mm thick flat concrete base under lift position (level side to side, to fall away from lifting face, max. fall is 10mm over 1900mm).
10. Remove the existing hand rail and timber fence, lay new edging stone along the boundary lane, supply and fit a 900mm high timber picket fence.
11. Forma small flower bed.
12. Flagged half landing.
13. Brick and flag steps, minimum 900mm wide with 300mm goings and maximum 170mm risers.
14. 600mm wide flagged access path.
15. Flagged area in front of steps and lift graded to pavement level.
16. Pollock Classic step lift with Manual upper gate, side rails with glazed panels, mechanical lower ramp, platform size 1400mm x 900mm and SWL 340 KG.
17. Post mounted lower call station.